

NOTE:

This SWPPP was prepared in accordance with City of Albany Unified Sustainable Development Ordinance (USDO). This SWPPP must be kept on the job site and available for use of contractors & sub-contractors. Certifications by Applicant/Developer and by the Contractors /Subcontractors are included. Sample Inspection Forms are included. SWPPP Inspections must be performed by a qualified professional and submitted to the Stormwater Program Manager at the Department of Water & Water Supply within 24 hours after inspection is completed. A pre-construction meeting is required to be held with a representative with the City of Albany Department of Water prior to the start of construction. Maintenance Plan is attached and includes both temporary and permanent facilities maintenance. This SWPPP, together with all required plans, completed inspection forms and a log of activities including any mitigation of items noted on inspection forms must be kept on the job site and available for inspection by regulatory authorities. An electronic copy of the SWPPP Inspection must be submitted to the Stormwater Management Coordinator.

**STORM WATER POLLUTION PREVENTION PLAN (SWPPP)
& STORM WATER MANAGEMENT REPORT (SWMR)**

25 Delaware Avenue Apartments

25 Delaware Avenue

CITY OF ALBANY

COUNTY OF ALBANY

STATE OF NEW YORK

Applicant: 25 Delaware, LLC

PREPARED BY:

HERSHBERG & HERSHBERG



CONSULTING ENGINEERS

18 Locust Street

Albany, NY 12203-2908

Phone 518-459-3096

Fax 518-459-5683

Email hhershberg@aol.com

May 2, 2019

Revised January 25, 2021

Revised March 15, 2021

Table of Contents

Introduction	1
Description of Existing Site	1
Parcel Area	1
Parcel Zoning	2
Watercourses	2
Existing Wetlands	2
Flood Plain	4
Historic Places or Archeological Resources	4
Listed, Endangered or Threatened Species	4
Existing Usage	5
Existing Soils.....	5
Watershed Description.....	7
Site Topography.....	8
Description of Intended Site Development and Use	8
Proposed Site Coverage Statistics.....;	8
Selected Method of Storage & Treatment.....	9
Design Considerations.....	9
Calculated Flows from Site.....	11
Water Quality Volume.....	11
Construction Sequencing & Sedimentation and Erosion Control During Construction.....	12
Housekeeping Section.....	16
Combined Sewer Overflows Best Management Practices	17
Description of Need for Winter Conditions.....	20
Winter Condition Item to be Addressed.....	22
Winter Conditions Summary.....	22
Maintenance Plan	23
Summary.....	23
Conclusion.....	24

Appendices

- Appendix #1 – Site Location Map
- Appendix #2 – Pre Tributary Map
- Appendix #3 – Post Tributary Map
- Appendix #4 – Maintenance Plan
- Appendix #5 - Maintenance Agreement
- Appendix #6 – HydroCAD® 10.00 Calculations
- Appendix #7 – WQv Calculation
- Appendix #8 – Spill Response Plan
- Appendix #9 – Data on Hydrodynamic Separator

Attachments

- Attachment #1 – SPDES GP#0-20-001
- Attachment #2 – Completed Notice of Intent
- Attachment #3 – Notice of Termination
- Attachment #4 – Certification of Contractor
- Attachment #5 – Certification of Owner/Developer
- Attachment #6 – Sample Inspection Form for use During Construction
- Attachment #7- MS4 Acceptance

- Map Pocket #1 – Sheet C-3 – Site Plan
- Map Pocket #2 – Sheet C-5 – Site Details
- Map Pocket #3 – Sheet C-6 – Utility Plan
- Map Pocket #4 – Sheet C-7 – Utility Details
- Map Pocket #5 – Sheet C-9 – Erosion and Sediment Control Plan
- Map Pocket #6 – Sheet C-10 – Erosion and Sediment Control Details

INTRODUCTION

Hershberg & Hershberg, Consulting Engineers and Land Surveyors, were retained by 25 Delaware, LLC, (hereinafter the “Applicant”) as site engineer for the construction of a new apartment building at 25 Delaware Avenue.

DESCRIPTION OF EXISTING SITE:

PARCEL AREA

The existing parcel is known as Tax Map Parcel #76.31-4-3 listed as No. 25 Delaware Avenue. The existing parcel contains 33,877 SF± (0.78 acres) of land.

The following are the site statistics for the site prior to redevelopment

EXISTING SITE USAGE STATISTICS			
Description	Area (SF)	Area (acres)	% of Site
Building Area	2,767	0.06	7.6%
Paved area	9,165	0.21	27.0%
Green Area	21,945	0.51	65.4%
Total Area	33,877	0.78	100.0%

Fig. No. 1 – Existing Site Coverage Statistics

An aerial photo of the site area is shown below.



Fig. No. 2 - Aerial Photo of Existing Site

PARCEL ZONING

The site lies entirely within the MU-CU: Mixed-Use, Community Urban zoning district.

WATERCOURSES



There are no watercourses located on the existing site.

EXISTING WETLANDS

There are no wetlands located on the existing site.



May 2, 2019

Wetlands	
	Freshwater Emergent Wetland
	Freshwater Forested/Shrub Wetland
	Freshwater Pond
	Estuarine and Marine Deepwater
	Estuarine and Marine Wetland
	Lake
	Other
	Riverine

This map is for general reference only. The US Fish and Wildlife Service is not responsible for the accuracy or currentness of the base data shown on this map. All wetlands related data should be used in accordance with the layer metadata found on the Wetlands Mapper web site.

National Wetlands Inventory (NWI)
This page was produced by the NWI mapper

Fig. No. 3 - From National Wetland Inventory

FLOOD PLAIN

The site to be developed lies entirely within Zone X (Area of Minimal Flooding) as shown on Flood Insurance Rate Maps reproduced below:

National Flood Hazard Layer FIRMette



Fig. No. 4 – FEMA Firmette

HISTORIC OR ARCHEOLOGICAL RESOURCES

The site contains an existing vacant building which was known as the Central Fire Alarm Station. This building is listed on the National Register of Historic Places.

LISTED, ENDANGERED OR THREATENED SPECIES

NYSDEC Environmental Resource Mapper shows no rare plants or animals or any significant natural community in the area of the project.

EXISTING USAGE

The site is currently occupied by a vacant building and is owned by Albany Community Development Authority.

EXISTING SOILS

The project area is located in an area of Urban Land- Udorthents complex. This soil is normally modeled as Hydrologic Class C soil.



Fig. No. 5 – Soils Map

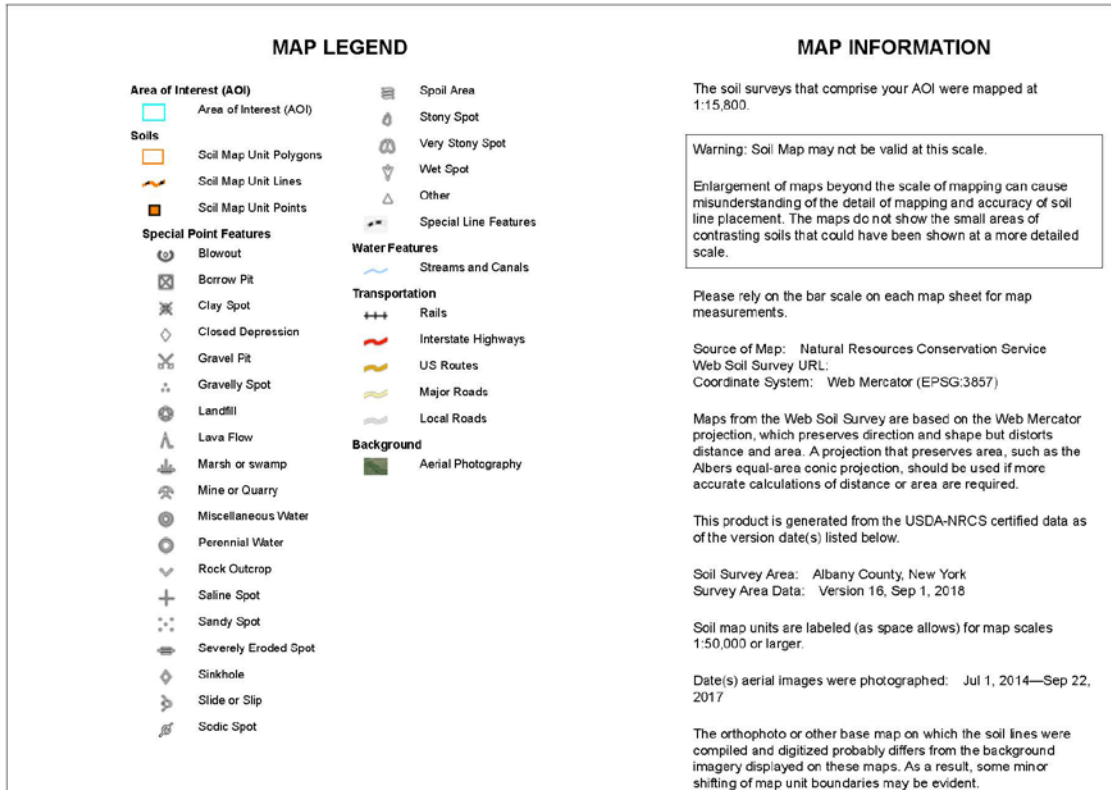


Fig. No. 6 - Map Legend

Map Unit Legend

Map Unit Symbol	Map Unit Name	Acres in AOI	Percent of AOI
Ut	Urban land-Udorthents complex, 0 to 8 percent slopes	1.2	100.0%
Totals for Area of Interest		1.2	100.0%

Fig. No. 7 - Map Unit Legend

Albany County, New York

Ut—Urban land-Udorthents complex, 0 to 8 percent slopes

Map Unit Setting

National map unit symbol: 9pjb
Mean annual precipitation: 36 to 41 inches
Mean annual air temperature: 45 to 48 degrees F
Frost-free period: 100 to 170 days
Farmland classification: Not prime farmland

Map Unit Composition

Urban land: 50 percent
Udorthents and similar soils: 30 percent
Minor components: 20 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Urban Land

Typical profile

H1 - 0 to 6 inches: variable

Description of Udorthents

Typical profile

H1 - 0 to 4 inches: channery loam
H2 - 4 to 70 inches: channery loam

Properties and qualities

Slope: 0 to 8 percent
Depth to restrictive feature: More than 80 inches
Natural drainage class: Moderately well drained
Capacity of the most limiting layer to transmit water (Ksat): Moderately low to high
(0.06 to 5.95 in/hr)
Depth to water table: About 36 to 72 inches
Frequency of flooding: None
Frequency of ponding: None
Calcium carbonate, maximum in profile: 15 percent
Available water storage in profile: Low (about 5.4 inches)

Minor Components

Unnamed soils, moderately well

Percent of map unit: 10 percent

Unnamed soils, poorly

Percent of map unit: 10 percent

Fig. No. 8- Map Unit Description

WATERSHED DESCRIPTION

The entire project area drains towards the southwest corner of the site where it is tributary to catch basins which are connected to the Myrtle Avenue Branch. This combined sewer is within the Beaver Creek Sewer District.

SITE TOPOGRAPHY

The project area slopes from the center of the site along Delaware Avenue at an elevation of 199.0 +/- to the southwestern corner of the project area at an elevation of 185.0 +/-.

DESCRIPTION OF INTENDED SITE DEVELOPMENT AND USE

Under the current applications the Applicant is proposing to construct a 4-story apartment consisting of 51 units above a garage floor with 30 parking spaces. The existing two-story building on site will be rehabilitated and will be available for tenant use. The site will also feature new landscaping, lighting and a stormwater management system. Water will be provided by a connecting to the 8" main on Lark Street, and sewer is provided by connecting to the existing building to the 12" VCP combined sewer on Lark Street. New catch basins will be installed to direct water to a pipe storage gallery beneath the garage floor which will also accept drainage from the roof drains. A storm planter also is place along the east side of the building which is also connected to a pipe storage gallery beneath the garage floor. A hydrodynamic separator adjacent to the building teats the discharge prior to discharge to a catch basin.

PROPOSED SITE COVERAGE STATISTICS

The proposed site coverage statistics for the project area are as shown below.

Description	Area (SF)	Area (Acres)	% of site
Building	15,234	0.35	45.0
Pavement/Sidewalk	4,000	0.09	11.8
Total Impervious	19,234	0.44	56.8
Pervious	14,643	0.34	43.2
Total Site	33,877	0.78	100.0

Fig. No. 9 - Proposed Site Coverage Statistics based on project limits

The site qualifies as a redevelopment site with an increase in Impervious Cover (IC) as described in Chapter 9 of the New York State Stormwater Management Design Manual.

SELECTED METHOD OF TREATMENT AND STORAGE:

The design of the SWMR includes the following elements of treatment and storage:

New catch basins will be installed to direct water to a pipe storage gallery beneath the garage floor which will also accept drainage from the roof drains. A storm planter also is placed along the east side of the building which is also connected to a pipe storage gallery beneath the garage floor. A hydrodynamic separator adjacent to the building treats the discharge prior to discharge to a catch basin. The system will have enough storage capacity to contain all storms up to the 100-year storm.

DESIGN CONSIDERATIONS:

The design of the SWPPP for the subject site considered the following critical factors:

1. Compliance with Section 375-4(G)(11) of the Unified Sustainable Development Ordinance entitled STORMWATER MANAGEMENT
 - (a) All development and redevelopment in the City shall comply with the requirements of Article 14 of Chapter 133 (Stormwater Management and Erosion Control) of the City Code, and with Chapter 299 (Sewers) of the City Code.
 - (b) Each application for development or redevelopment shall be referred to the Department of Water and Water Supply for a determination of whether the existing sanitary and storm sewer infrastructure is adequate in size, location, connectivity, and

construction quality to accommodate expected flows of both sanitary sewer and stormwater from the proposed facility. If the Albany Department of Water and Water Supply determines that the existing sanitary and/or storm sewer infrastructure is not adequate to accommodate expected sanitary and stormwater flows from the proposed development, the City may require that the applicant modify the proposed development and/or install or contribute a proportional share of the overall cost to the installation of required storm and sanitary sewer infrastructure before the proposed development is approved, and the applicant may be required to pay its proportionate share of those costs.

(c) All development and redevelopment within the City with a proposed area of disturbance greater than or equal to one-quarter (1/4) of an acre in size shall comply with the latest version of the New York State Department of Environmental Conservation Stormwater Management Design Manual that are written as applicable to properties with areas of disturbance of one (1) acre in size or larger.

(d) The maximum allowable design peak-flow stormwater discharge into the combined sewer system shall be limited to the calculated peak-flow discharge of the **10-year storm for un-development site conditions**, as determined by a Professional Engineer, and to be reviewed and accepted by the Department of Water and Water Supply. (emphasis added)

2. During construction comply with the *New York State Standards and Specifications for Erosion and Sediment Control* dated July, 2016.

3. The permanent system complies with the New York State Stormwater Management Design Manual (hereinafter NYSSWDM), last revised

January, 2015 with the exception of the consideration of the 10 year undeveloped site as opposed to the redevelopment standard.

CALCULATED FLOWS FROM THE SITE

The following table is prepared from the comparisons between the Undeveloped and the proposed conditions as detailed on the HydroCAD®10.00 contained in Appendix 6.

Fig. No. 9 – Calculated Flows from the site

With the entire site considered as undeveloped for the existing computation, the peak-flow 100 year discharge of the post development site is reduced to less than the 10 year storm.

WATER QUALITY VOLUME

Water Quality Volume (WQ_v) is computed based upon the following formula:¹

$$WQ_v = \frac{(P) (R_v) (A)}{12}$$

Where WQ_v = water quality volume (acre-feet)

P = 90% rainfall event² (1.20 inches)

¹

Ibid. Table 4-1, Page 4-3

²

Ibid., Page 4-2, Figure 4.1

$R_v = 0.05 + 0.009 I$, where I is percent impervious cover

A = site area in acres

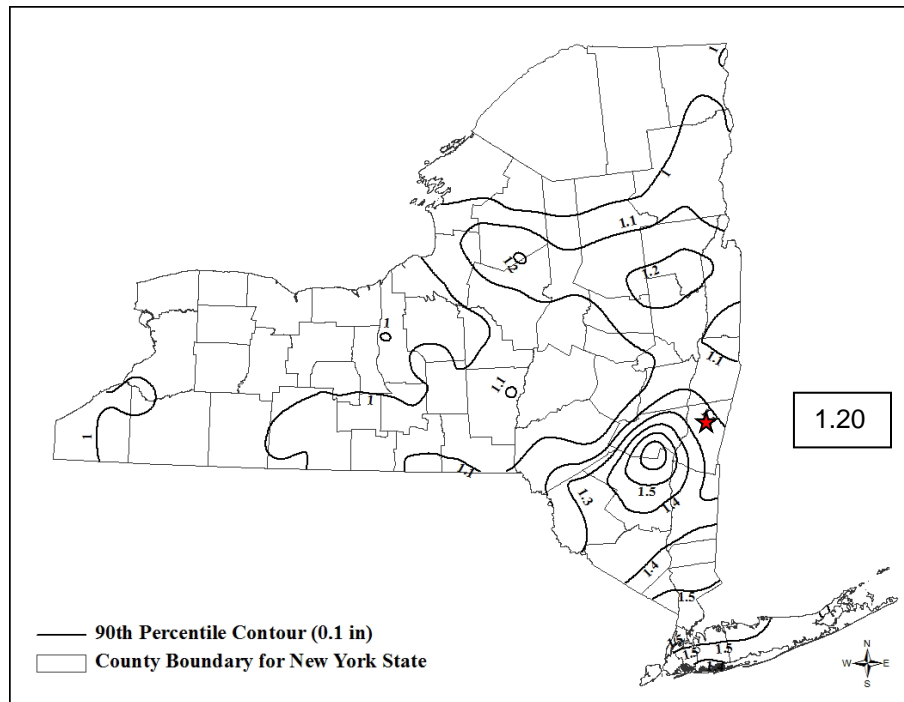


Fig. No. 10 – NYSDEC 90th Percentile Contour

The Water Quality Volume (WQ_v) is computed in Appendix #7. The total WQ_v for the project area is 0.043 acre-feet (1,863 cubic feet).

CONSTRUCTION SEQUENCING & SEDIMENTATION AND EROSION CONTROL DURING CONSTRUCTION

The construction sequence for this project will be governed by the erosion and sediment control plan. Approximate timing is indicated where applicable in red following steps.

Prior to commencement of any work this SWPPP

- ✓ Assure that copy of SWMR & SWPPP is on the site. **ON**

COMMENCEMENT

- ✓ Establish Qualified Individual who will be performing site inspection. **ON COMMENCEMENT**
- ✓ SWPPP Inspections must be performed by the qualified professional must be submitted to the MS4 Coordinator. **FROM COMMENCEMENT UNTIL FILING THE NOTICE OF TERMINATION.**
- ✓ SWPPP Inspections must be performed by a qualified professional and submitted to MS4 Coordinator at Department of Water within 24 hours of inspection completion. **FROM COMMENCEMENT UNTIL FILING THE NOTICE OF TERMINATION.”**
- ✓ A pre-construction meeting is required. **PRIOR TO COMMENCEMENT OF ANY EARTH DISTURBANCES**
- ✓ A site assessment that certifies erosion and sediment controls described in the SWPPP are in place prior to construction commencement must be completed by a qualified professional and submitted to the prior to MS4 Coordinator at Department of Water within 24 hours of inspection completion. **PRIOR TO COMMENCEMENT OF ANY EARTH DISTURBANCES**
- ✓ Establish Trained Contractor who will be on site. At least one Trained Contractor must be on site whenever ground disturbing activities are being undertaken. **ON COMMENCEMENT**
- ✓ Establish contact person for Contractor/Subcontractor. **ON COMMENCEMENT**
- ✓ **IN CASE OF ANY SPILLS OF MATERIALS ON SITE, EXECUTE SPILL RESPONSE PLAN CONTAINED IN APPENDIX #9**

Construction Sequence

- ✓ Commence work on site. **WITHIN 10 DAYS OF PRE-CONSTRUCTION MEETING**
- ✓ Install silt fence or other controls as indicated on the plan. **PRIOR TO COMMENCEMENT OF ANY GRADING – FENCE TO REMAIN IN PLACE UNTIL ALL AREAS ARE STABILIZED.**

- ✓ Grade and prepare construction access. **PRIOR TO COMMENCEMENT OF ANY GRADING – CONSTRUCTION ACCESS TO REMAIN IN PLACE UNTIL ALL AREAS ARE STABILIZED.**
- ✓ Commence installation of the temporary sediment trap, interception swale, drop inlet protection, and portion of storm sewer. **PRIOR TO BUILDING EXCAVATION.**
- ✓ The existing pavement must be kept swept clean to avoid tracking materials onto any streets. **CONTINUOUSLY FROM INCEPTION TO COMPLETION OF STABILIZATION OR FILING OF NOTICE OF TERMINATION.**
- ✓ Maintain this area clean of debris and verify condition and safety of storage of materials listed below. Requires daily inspection. **CONTINUOUSLY FROM INCEPTION TO FILING OF NOTICE OF TERMINATION.**
- ✓ Any construction materials, chemicals or construction debris must be stored in sealed receptacles, trailers or buildings. Any storage piles of materials meant for installation (i.e., sand, etc.) must be surrounded by sedimentation fence. The list of anticipated materials stored on site during construction is provided below and must be updated if any additional materials are utilized: **CONTINUOUSLY FROM INCEPTION TO FILING OF NOTICE OF TERMINATION.**
 - Select Fill
 - Rip-rap
 - Fencing Materials
 - Concrete Structures
 - Pipes
 - Pipe Solvents
 - Concrete for building
 - Roofing Materials for Building
 - Metal Materials for Building

□ Building Materials for Building

- ✓ MSDS sheets must be available on site for all materials used or imported to the site. **CONTINUOUSLY FROM INCEPTION TO FILING OF NOTICE OF TERMINATION.**
- ✓ Any chemical spills must be contained immediately on site and reported to NYSDEC. **CONTINUOUSLY FROM INCEPTION TO FILING OF NOTICE OF TERMINATION.**
- ✓ Oil and grease spills from equipment shall be treated immediately. **CONTINUOUSLY FROM INCEPTION TO FILING OF NOTICE OF TERMINATION.**
- ✓ Commence installation of the temporary sediment trap and interception swale. **PRIOR TO GRADING.**
- ✓ Clean interception swale and sediment trap as required. **CONTINUOUSLY FROM INSTALLATION UNTIL FILING OF NOTICE OF TERMINATION.**
- ✓ Check condition of Silt Fence. **CONTINUOUSLY FROM INSTALLATION UNTIL FILING OF NOTICE OF TERMINATION.**
- ✓ Install building, place pavement and prepare lawns and planters. **PRIOR TO FILING OF NOTICE OF TERMINATION.**
- ✓ Clean any downstream structures of any accumulated silt. **PRIOR TO FILING OF NOTICE OF TERMINATION.**
- ✓ Seed and mulch. **PRIOR TO FILING OF NOTICE OF TERMINATION.**
- ✓ Obtain approval on Notice of Termination from MS4 coordinator after site has achieved >80% grass cover.. **PRIOR TO FILING OF NOTICE OF TERMINATION.**
- ✓ File NOTICE OF TERMINATION.

HOUSEKEEPING SECTION

During construction any construction materials, chemicals or construction debris must be stored in sealed receptacles, trailers or buildings. Any storage piles of materials meant for installation (i.e., sand, etc.) must be surrounded by sedimentation fence. The list of anticipated materials stored on site during construction is provided below and must be updated if any additional materials are utilized:

- Select Fill
- Rip-rap
- Fencing Materials
- Concrete Structures
- Pipes
- Pipe Solvents
- Concrete for building
- Roofing Materials for Building
- Building Materials for Building

MSDS sheets must be available on site for all materials used or imported to the site.

Any chemical spills must be contained immediately on site and reported to NYSDEC.

IN CASE OF ANY SPILLS OF MATERIALS ON SITE, EXECUTE SPILL RESPONSE PLAN CONTAINED IN APPENDIX #8

Oil and grease spills from equipment shall be treated immediately. Vehicle fueling must take place in designated area. Relocate designated fueling area when required. A concrete truck washout must be provided and used by all trucks washing out concrete. Pit must be maintained and pumped out regularly.

After construction, materials and chemicals must be stored in sealed receptacles or in buildings. Daily inspection by trained individual shall be

made by staff to ensure that materials listed below are properly stored. The list of anticipated materials stored on site after occupancy of the building and solar farm is provided below and must be updated if any additional materials are utilized:

□Cleaning Materials for Building

MSDS sheets must be available on site for all materials utilized for used or imported to the site. Any chemical spills must be contained immediately on site and reported to NYSDEC. Oil and grease spills from equipment shall be treated immediately.

COMBINED SEWER OVERFLOW BEST MANAGEMENT PRACTICES

NYSDEC issued a City of Albany Combined Sewer Overflow SPDES Permit, DEC ID#s 4-0101-00012/00001 SPDES #s NY0025747 on November 30, 2018. It included fifteen Best Management Practices which are reviewed below:

1. CSO Operation/Maintenance/Inspection – Not Applicable to this project although maintenance and inspection of Storm Water Management System is covered by maintenance agreement.
2. Maximum Use of Collection System for Storage – Not Applicable
3. Industrial Pretreatment — There are industrial discharges and no toxic substances which will be discharged to the combined sewer.
4. Maximize Flow to POTW_-Not applicable.
5. Wet Weather Operating Plan -Not applicable

6. Prohibition of Dry Weather Overflow – Dry weather overflows from the combined sewer system (CSS) are prohibited. Sewer outfalls from the site are separated into storm and sanitary sewer laterals. Dry weather flow can be accommodated from the site as there are no dry weather overflows currently existing at the Beaver Creek (Big C) interceptor chamber. Combined flow to the combined sewer is reduced for all storms from the 1 year storm to the 100 year storm.
7. Control of Floatable and Settleable Solids - The Applicant will provide a notice with leases that deposition of oil/grease or toilet litter is not allowed.
8. Combined Sewer System Replacement – Not applicable.
9. Sewer/Extension – Sewer/extension, when approved by the Department, should be accomplished using separate sewers. Sewer outfalls from the site are separated into storm and sanitary sewer laterals without interconnections. No new source of storm water shall be connected to any separate sanitary sewer in the collection system. The reduction in flow to the combined sewer is reduced by an amount at least equal to the estimated increased peak hourly dry-weather flow or four (4) times the average daily dry-weather flow, whichever is greater. The peak flow is estimated as 0.012 CFS. The amount of storm water at the 1 year storm is from the existing site is 5.04 CFS which is reduced to 2.48 CFS, a reduction of 2.56 CFS or a 213 times the dry weather flow.
10. Sewage Backups - There have been documented, recurrent instances of sewage backing up into house(s) or discharges of raw

sewage onto the ground surface from surcharging manholes in this area. Since the combined flow to the combined sewer is reduced for all storms from the 1 year to the 100 year storm frequencies this project will not make potential surcharging/back-up problems worse.

11. Septage and Hauled Waste - Not Applicable.
12. Control of Run-off - The impacts of run-off from development and re-development in areas served by combined sewers shall be reduced by requiring compliance with the New York Standards for Erosion and Sediment Control and the quantity control requirements included in the New York State Stormwater Management Design Manual. The combined flow to the combined sewer system is reduced for all storms from the 1 year to the 100-year storm frequencies for this project.

The site was entirely in fill so infiltration practices were not practical to use on the site. Also, solutions such as bio-retention basins, extended detention basin, etc. were not feasible solutions on the site due to the lack of significant level areas which could be utilized for basin solutions. A storm water planter is utilized to treat some of the drainage to the east side of the building. Also, a hydrodynamic separator is employed to treat the outfall from the pipe storage gallery beneath the garage floor. The total outflow from the site is controlled as required by USDO. The discharge from the fully developed site during a 100 year frequency storm (2.40 CFS) is less than the discharge from the undeveloped site taken as entirely pervious surface at the 10 year frequency storm (2.48 CFS). The table below is from the SWPPP.

Utilizing this method results in excess storage capacity than would have been required by the strict application of Redevelopment Standards as per Chapter 9 of the New York State Stormwater Management Design Manual.

13. Public Notification - Not Applicable.
14. Characterization and Monitoring -Not Applicable
15. Annual report - Not Applicable.

DESCRIPTION OF NEED FOR WINTER CONDITION

The construction sequence for this project may require work between November 15th and April 1st of any year when construction is ongoing. Some unstabilized soil areas may exist on November 15th. This Section is issued for use in the event that such conditions exist. The **STANDARD AND SPECIFICATIONS FOR WINTER STABILIZATION** (reproduced below) will apply to this project area. Accommodations for wintertime conditions are addressed below.

STANDARD AND SPECIFICATIONS FOR WINTER STABILIZATION



Definition & Scope

A temporary site specific, enhanced erosion and sediment control plan to manage runoff and sediment at the site during construction activities in the winter months to protect off-site water resources.

Conditions Where Practice Applies

This standard applies to all construction activities involved with ongoing land disturbance and exposure between November 15th to the following April 1st.

Design Criteria

1. Prepare a snow management plan with adequate storage for snow and control of melt water, requiring cleared snow to be stored in a manner not affecting ongoing construction activities.
2. Enlarge and stabilize access points to provide for snow management and stockpiling. Snow management activities must not destroy or degrade installed erosion and sediment control practices.
3. A minimum 25 foot buffer shall be maintained from all perimeter controls such as silt fence. Mark silt fence with tall stakes that are visible above the snow pack.
4. Edges of disturbed areas that drain to a waterbody within 100 feet will have 2 rows of silt fence, 5 feet apart, installed on the contour.
5. Drainage structures must be kept open and free of snow and ice dams. All debris, ice dams, or debris from plowing operations, that restrict the flow of runoff and meltwater, shall be removed.
6. Sediment barriers must be installed at all appropriate

perimeter and sensitive locations. Silt fence and other practices requiring earth disturbance must be installed before the ground freezes.

7. Soil stockpiles must be protected by the use of established vegetation, anchored straw mulch, rolled stabilization matting, or other durable covering. A barrier must be installed at least 15 feet from the toe of the stockpile to prevent soil migration and to capture loose soil.
8. In areas where soil disturbance activity has temporarily or permanently ceased, the application of soil stabilization measures should be initiated by the end of the next business day and completed within three (3) days. Rolled erosion control blankets must be used on all slopes 3 horizontal to 1 vertical or steeper.
9. If straw mulch alone is used for temporary stabilization, it shall be applied at double the standard rate of 2 tons per acre, making the application rate 4 tons per acre. Other manufactured mulches should be applied at double the manufacturer's recommended rate.
10. To ensure adequate stabilization of disturbed soil in advance of a melt event, areas of disturbed soil should be stabilized at the end of each work day unless:
 - a. work will resume within 24 hours in the same area and no precipitation is forecast or;
 - b. the work is in disturbed areas that collect and retain runoff, such as open utility trenches, foundation excavations, or water management areas.
11. Use stone paths to stabilize access perimeters of buildings under construction and areas where construction vehicle traffic is anticipated. Stone paths should be a minimum 10 feet in width but wider as necessary to accommodate equipment.

Maintenance

The site shall be inspected frequently to ensure that the erosion and sediment control plan is performing its winter stabilization function. If the site will not have earth disturbing activities ongoing during the "winter season", all bare exposed soil must be stabilized by established vegetation, straw or other acceptable mulch, matting, rock, or other approved material such as rolled erosion control products. Seeding of areas with mulch cover is preferred but seeding alone is not acceptable for proper stabilization.

Compliance inspections must be performed and reports filed properly in accordance with the SWPPP for all sites under a winter shutdown.

WINTER CONDITIONS ITEMS TO BE ADDRESSED

1. Identify areas within the site to store snow which is tributary to the temporary sediment control trap. As work progresses this area may move but positive drainage tributary to the temporary sediment control trap must be maintained.
2. Widen stabilized construction access points to a minimum of 15 feet. Where pavement forms a portion of that route, maintain 50 feet of stone pavement meeting the detail as shown on the SWPPP plan. Stockpile a minimum of 25 cubic yard of stone for the purposes of establishing stone access point after snow storms.
3. Where any areas at the street grade or within two feet of the street grade remain disturbed overnight, stabilize those areas using 6" of broken stone.
4. Where equipment or vehicles are traversing the bottom of the excavation, establish paths using 6" of broken stone.
5. At any point on the perimeter where drainage from accumulated snow or ice will drain away from the site protect these areas coir logs or polyethelene coated check dam materials (Filtrexx, Erosion eel or equal).
6. If work is to cease for more than 3 days, stabilize all disturbed soils.

WINTER CONDITIONS SUMMARY:

The following is a summary of the required work if wintertime as presented by the preparer of this report:

1. The temporary system and control measures proposed herein and on the plans comply with the *New York State Standards and Specifications for Erosion and Sediment Control* dated July, 2016.
2. The winter stabilization complies with Standard and Specifications for Winter Stabilization as described *New York State Standards and Specifications for Erosion and Sediment Control* dated July, 2016.

MAINTENANCE PLAN

The maintenance of the Hydrodynamic Separator will be the responsibility of the applicant. Maintenance plans have been developed and are contained in Appendix #4.

SUMMARY:

The following is a summary of the findings of this study as presented by the preparer of this report:

1. The temporary system and control measures proposed herein and shown on the plans comply with the *New York State Standards and Specifications for Erosion and Sediment Control* dated July, 2016.
2. The permanent system complies with Section 375-4(G)(11) of the Unified Sustainable Development Ordinance entitled STORMWATER MANAGEMENT.

CONCLUSION:

It is the conclusion of the Engineer that the drainage system, as designed, will function adequately and will not adversely affect adjacent or downstream properties.



A handwritten signature in black ink, appearing to read "D. Hershberg", is written over a horizontal line.


Prepared by: _____

Daniel R. Hershberg, P.E. & L.S.
Lic. No. 044226

File:DRH/SWPPP/SWPPPSWMR20180224 10 25 21.DOC


APPENDIX #1

SITE LOCATION MAP

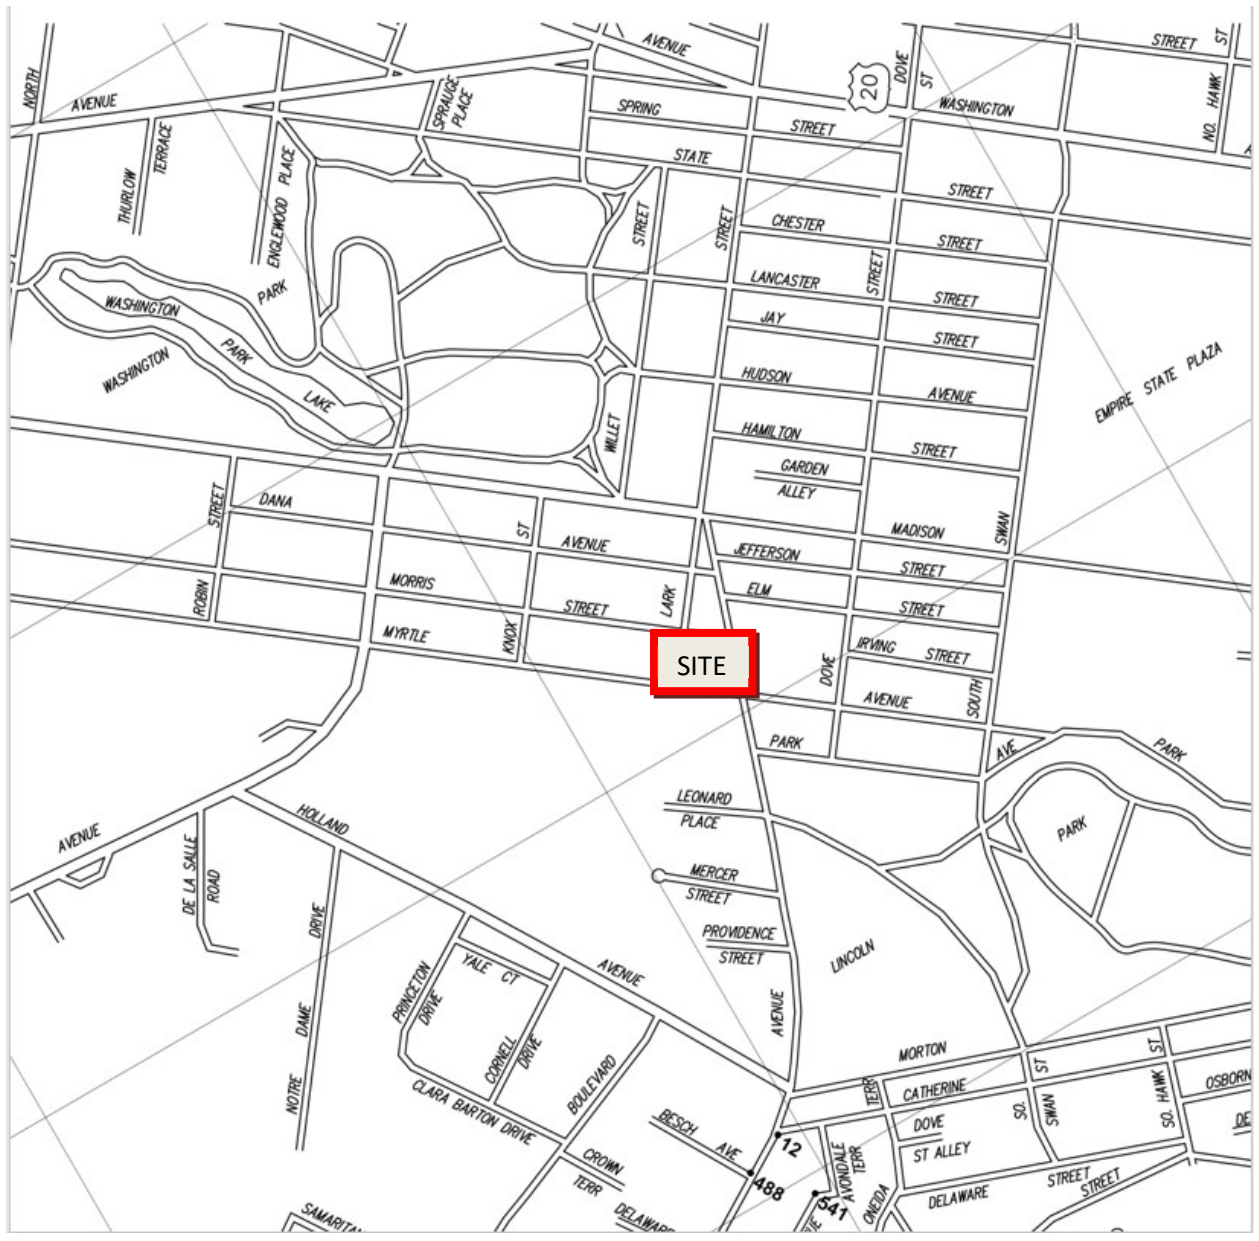

APPENDIX #2

PRE TRIBUTARY MAP

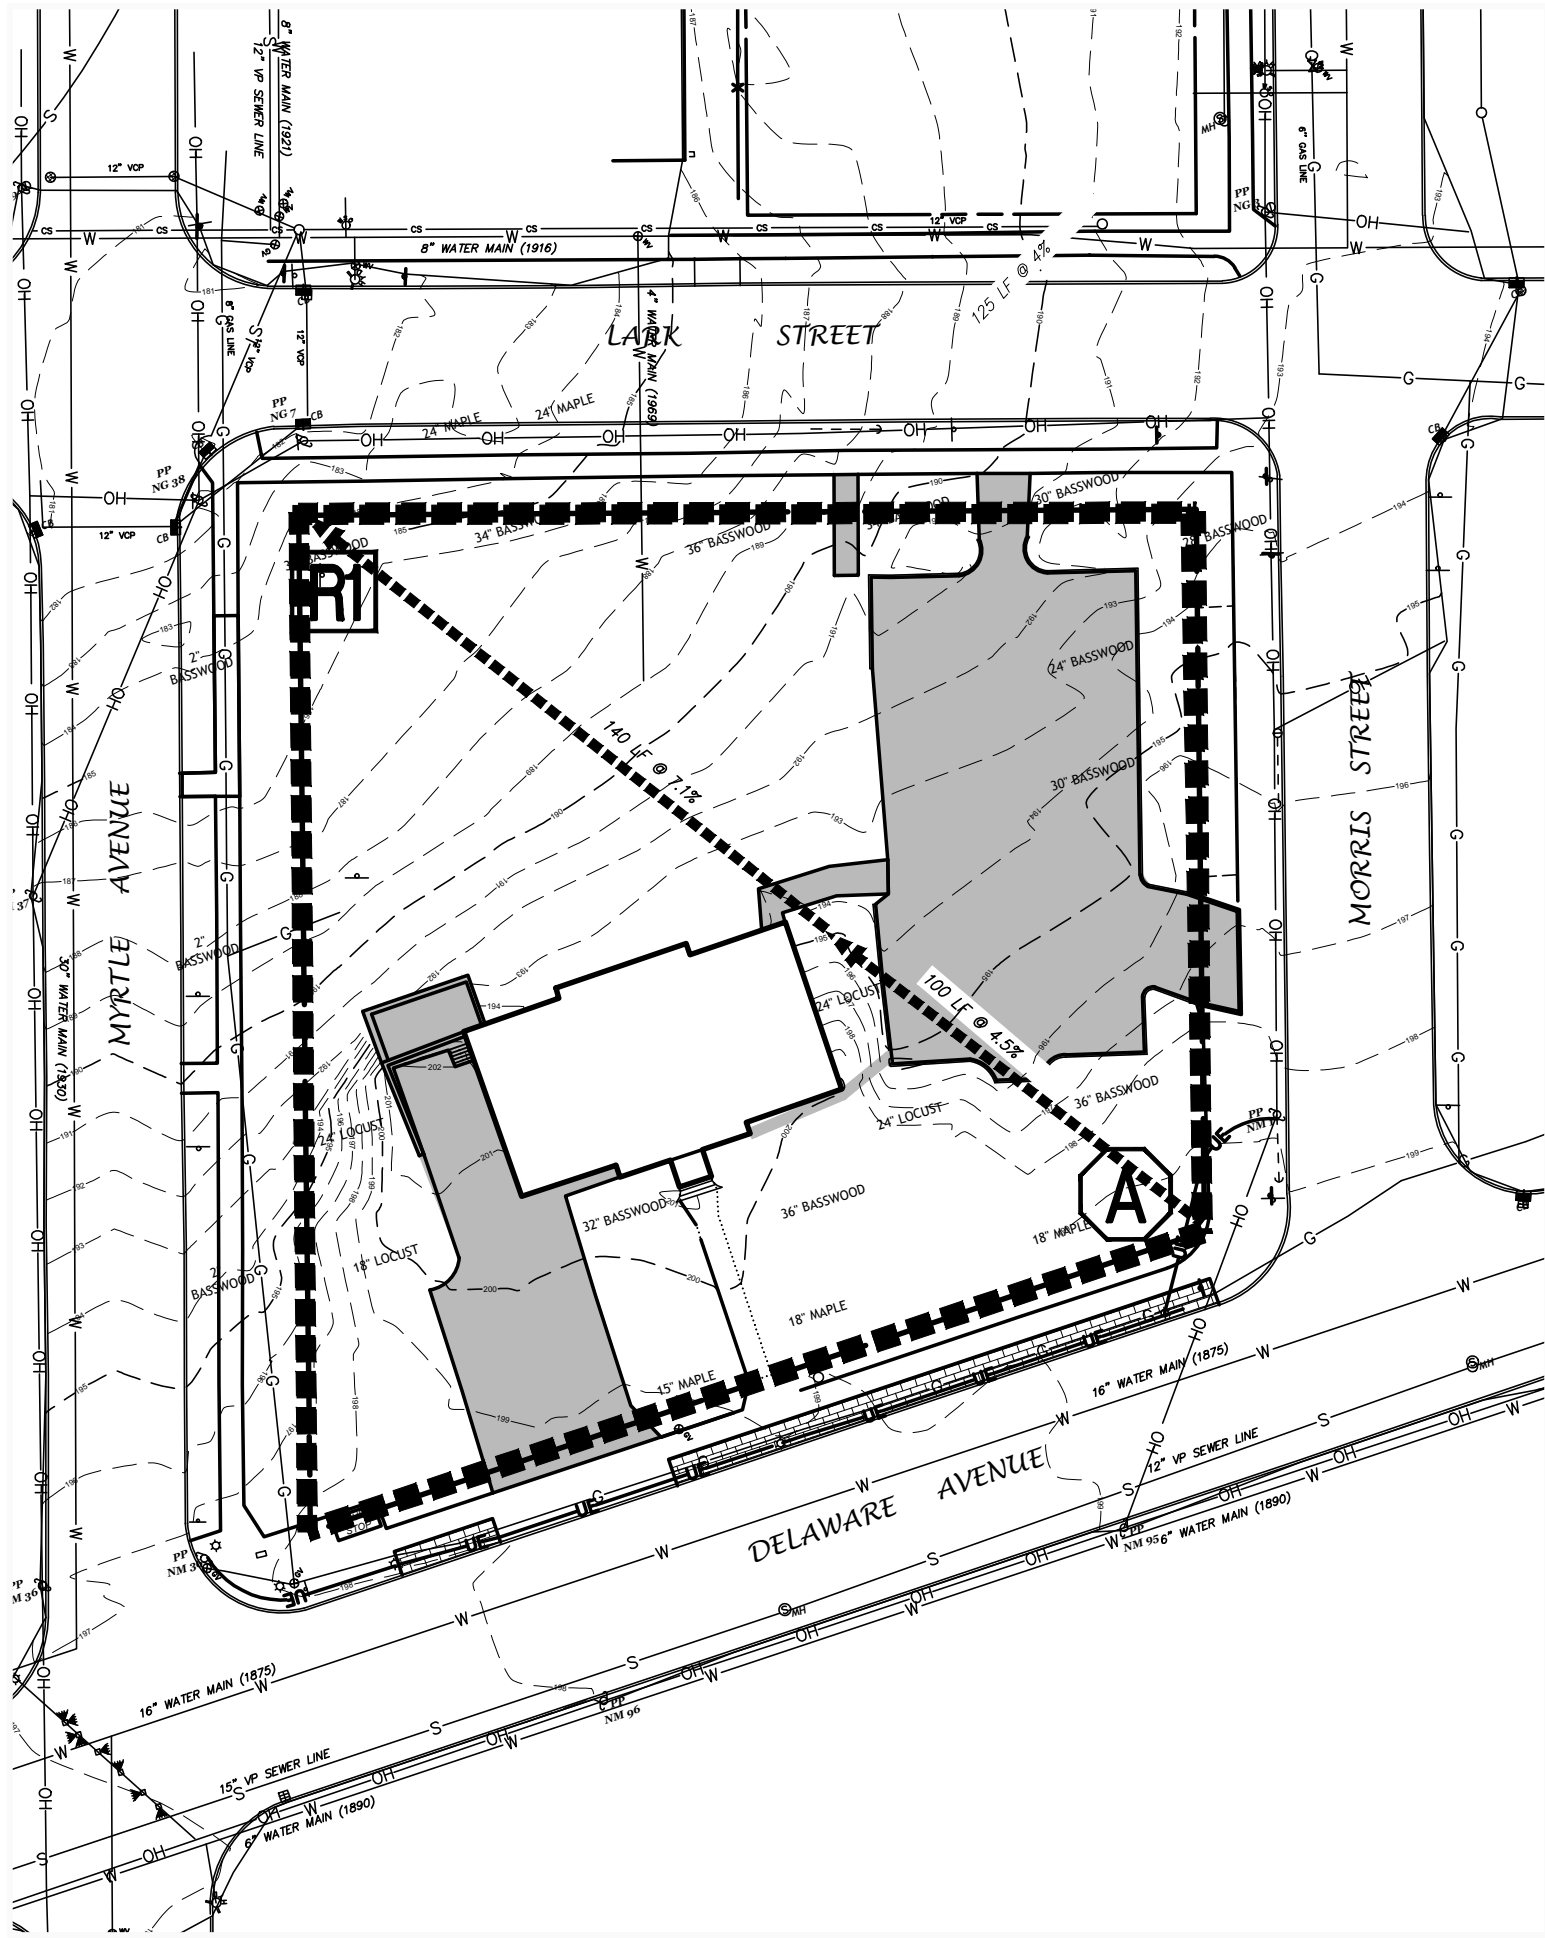

PRE DEVELOPMENT TRIBUTARY AREA MAP
 25 DELAWARE AVENUE
 CITY OF ALBANY,
 ALBANY COUNTY, NY



DENOTES TRIBUTARY AREA NODE



DENOTES REACH NODE




DENOTES STORAGE NODE



DENOTES LIMITS OF TRIBUTARY AREA




DENOTES Tc / Tt



APPENDIX #3

POST TRIBUTARY MAP

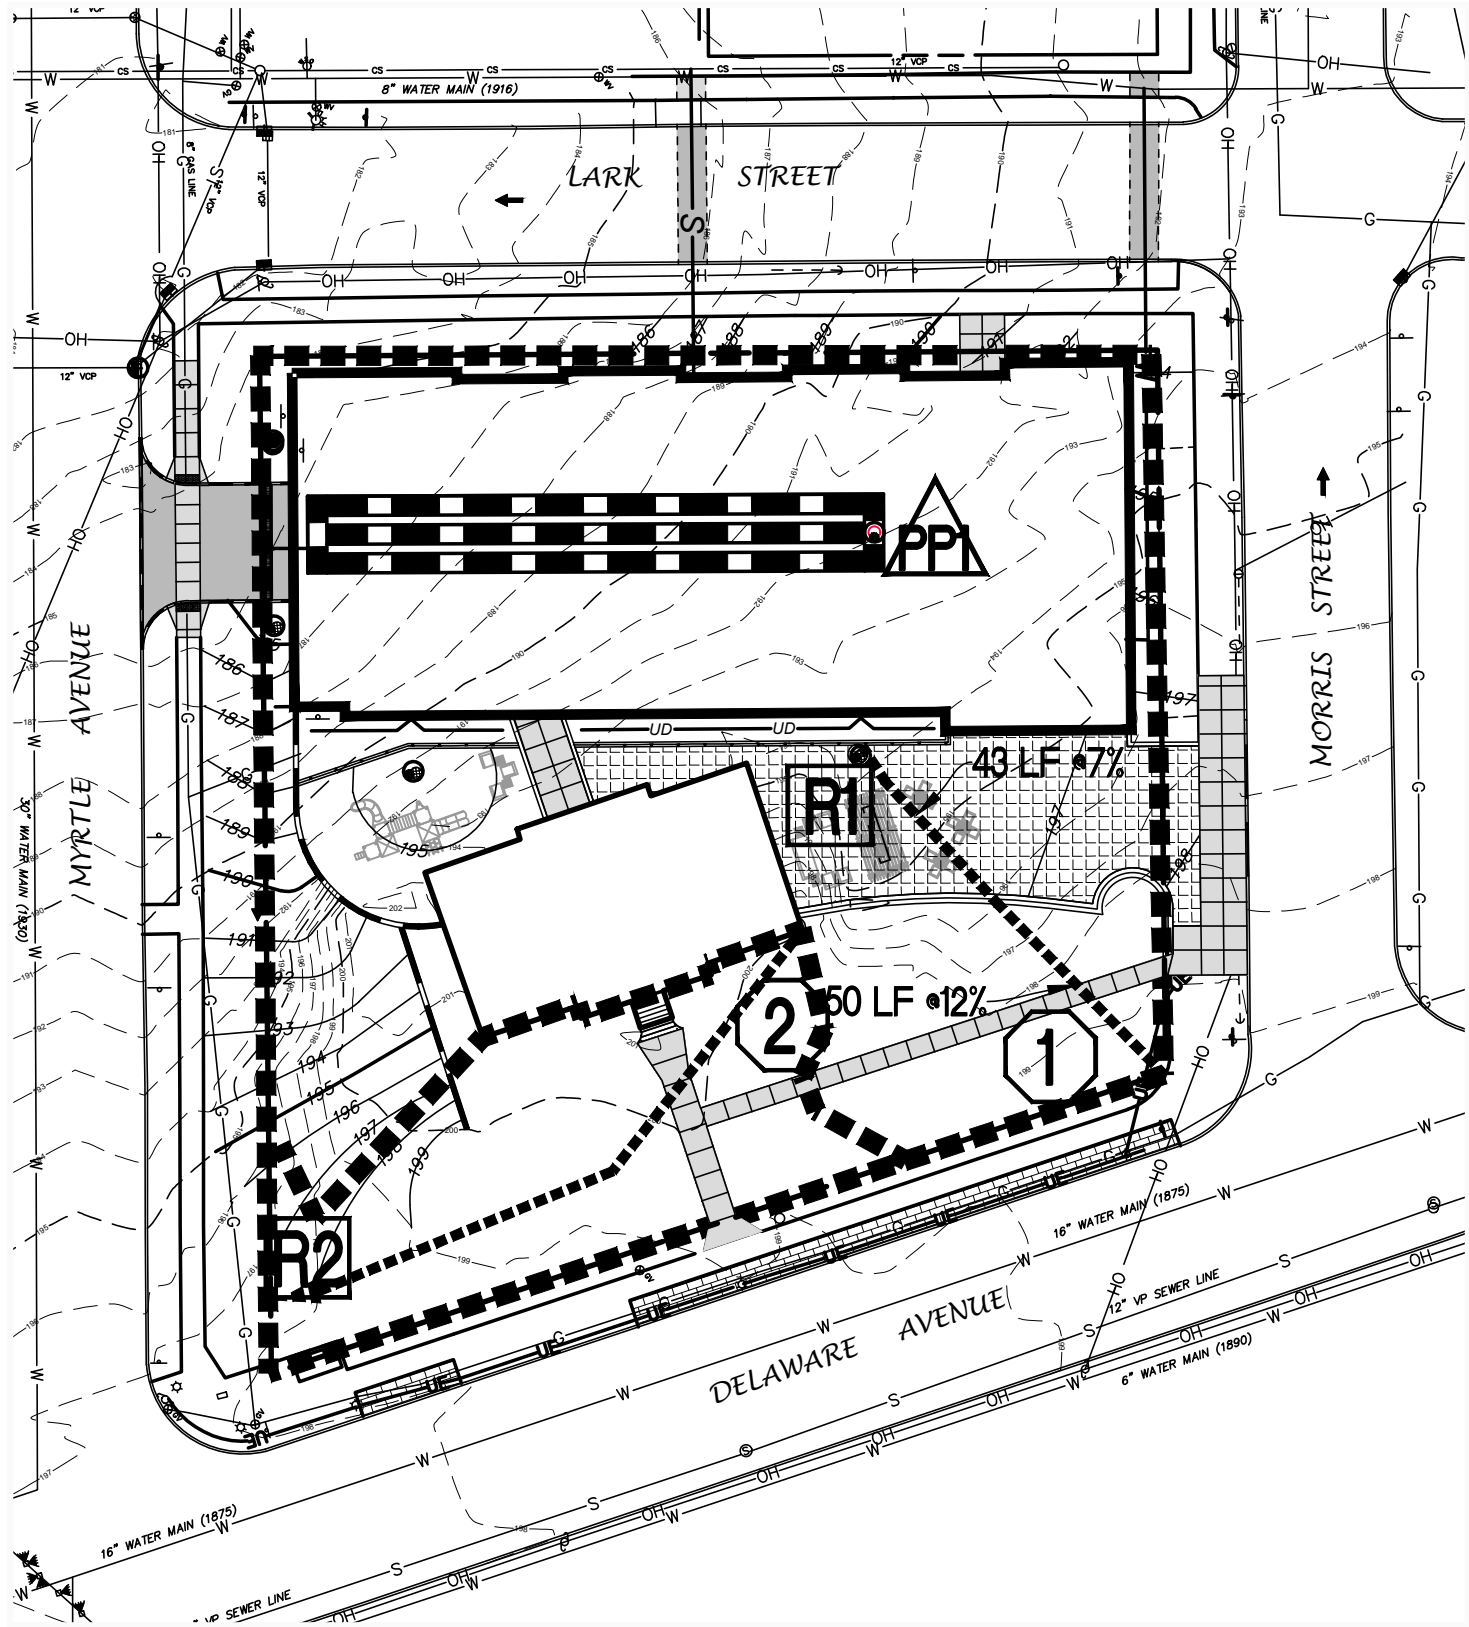

**POST DEVELOPMENT TRIBUTARY AREA MAP
25 DELAWARE AVENUE
CITY OF ALBANY,
ALBANY COUNTY, NY**



DENOTES TRIBUTARY AREA NODE



DENOTES REACH NODE




DENOTES STORAGE NODE



DENOTES LIMITS OF TRIBUTARY AREA



DENOTES Tc / Tt



APPENDIX #4

MAINTENANCE PLAN

Facility Owner (Responsible Party):
25 Delaware, LLC
25 Delaware Avenue
Albany, NY 12209

The facility owner will be responsible to provide capital funding for this facility. The source will be from infrastructure funds set aside for construction. On an annual basis the responsible party will budget funds to fund the annual operating and maintenance costs. The facility owner must maintain all drainage facilities, stormwater quantity control facilities and all stormwater quality control facilities in accordance with approved plans and with this maintenance manual. Complete inspection form and retain with SWPPP. Inspection may be performed by a Qualified Inspector or a Qualified Professional. The Qualified Inspector is defined in GP #0-20-002 as follows:

Qualified Inspector - means a person that is knowledgeable in the principles and practices of erosion and sediment control, such as a licensed Professional Engineer, Certified Professional in Erosion and Sediment Control (CPESC), Registered Landscape Architect, or other Department endorsed individual(s). It can also mean someone working under the direct supervision of, and at the same company as, the licensed Professional Engineer or Registered Landscape Architect, provided that person has training in the principles and practices of erosion and sediment control. Training in the principles and practices of erosion and sediment control means that the individual working under the direct supervision of the licensed Professional Engineer or Registered Landscape Architect has received four (4) hours of Department endorsed training in proper erosion and sediment control principles from a Soil and Water Conservation District, or other Department endorsed entity. After receiving the initial training, the individual working under the direct supervision of the licensed Professional Engineer or Registered Landscape Architect shall receive four (4) hours of training every three (3) years. It can also mean a person that meets the *Qualified Professional qualifications in addition to the Qualified Inspector qualifications.*

The Qualified Professional is defined in GP #0-20-001 as follows:

Qualified Professional - means a person that is knowledgeable in the principles and practices of stormwater management and treatment, such as a licensed Professional Engineer, Registered Landscape Architect or other Department endorsed individual(s). Individuals preparing SWPPPs that require the post-construction stormwater management practice component must have an understanding of the principles of hydrology, water quality management practice design, water quantity control design,

and, in many cases, the principles of hydraulics in order to prepare a SWPPP that conforms to the Department's technical standard. All components of the SWPPP that involve the practice of engineering, as defined by the NYS Education Law (see Article 145), shall be prepared by, or under the direct supervision of, a professional engineer licensed to practice in the State of New York.

The elements of this SWPPP which require inspection include:

Overall Function of Collection System

This inspection includes pipe from catch basins to the Hydrodynamic Separator which is connected to the infiltration basin. Also examine the quality of vegetation cover. If vegetation is not in healthy condition report to owner and schedule another site visit after vegetation is restored to required levels. If objectionable odors exist determine source and report to the owner for correction. Determine schedule for repair and perform an inspection upon repair.

Vegetation cover within the tributary area. The inspection shall verify that for lawns or other seeded areas that vegetation covers a minimum of 90% of the exposed ground. Other areas such as mulch beds or landscaped areas shall be inspected to verify that proper mulching is in place.

Rip-Rap or broken stone in in overflow and check dams. Inspection shall verify that these areas are to proper grade and that no material has been moved by erosive impact of water.

Concrete structures. Inspection shall verify that structures and their metal frames & grates or metal covers are in good condition. Structures shall be opened to verify that structures are clean.

Housekeeping Section – This section describes items requiring regular checking and should be conducted on a daily basis.

Daily inspection.

Debris cleanup – Remove and dispose of all debris encountered on roadway, near outfalls or in area adjacent to public right-of-way.

Materials storage – Verify that all materials identified in the Housekeeping Section have been properly stored.

Oil & Grease – Any visible oil and grease shall be treated with proper materials to capture residue. Remove any materials from the site. If possible, determine cause of accumulation of oil & grease and address these.

Monthly inspection or inspection after every significant rainfall (0.5 inches in 24 hours) shall determine whether the following benchmarks are reached in which case appropriate action shall be taken.

Condition of vegetation – Vegetation within the sediment basin and in the infiltration basin should be examined to determine the condition. Other areas with seeded lawns should be maintained in accordance with good cultural practices. Mow and remove clippings if required. Dead or diseased plant material shall be replaced.

Annual inspection shall determine whether the following benchmarks are reached in which case appropriate action shall be taken:

Condition of vegetation – Areas with seeded lawns should be maintained in accordance with good cultural practices. Mow and remove clippings if required. Dead or diseased plant material shall be replaced.

Structures and pipes – Inspect condition of all concrete structures for spalling or cracking. Repair or replace as required. Examine metal grates and repair or replaces as required.

Hydrodynamic Separator & Collection System
**Operation, Maintenance
and Management Inspection Checklist (Complete in 3 Pages)**

Project: 25 Delaware avenue Apartments
Location: 25 Delaware Avenue
City of Albany, Albany County, NY
Site Status: _____
Date: _____
Time: _____
Inspector: _____

MAINTENANCE ITEM	SATISFACTORY(S)/ UNSATISFACTORY(U)	COMMENTS
------------------	---------------------------------------	----------

<u>1. Hydrodynamic Separator (Monthly or after any significant storm event)</u>		
Contributing areas clean of debris	<input type="checkbox"/> (S) <input type="checkbox"/> (U)	
Swirl Chamber contains less than 3 CF (remove if greater)	<input type="checkbox"/> (S) <input type="checkbox"/> (U)	
<u>2. Oil and Grease (Monthly)</u>		
Inspect water for evidence of oil & grease	<input type="checkbox"/> (S) <input type="checkbox"/> (U)	
Activities in drainage area minimize oil and grease entry	<input type="checkbox"/> (S) <input type="checkbox"/> (U)	
<u>3. Vegetation Control (Monthly)</u>		
Contributing drainage area stabilized	<input type="checkbox"/> (S) <input type="checkbox"/> (U)	
No evidence of erosion	<input type="checkbox"/> (S) <input type="checkbox"/> (U)	
Area mowed and clipping removed	<input type="checkbox"/> (S) <input type="checkbox"/> (U)	

MAINTENANCE ITEM	SATISFACTORY(S)/ UNSATISFACTORY(U)	COMMENTS
------------------	---------------------------------------	----------

4. Structural Components (Annual)

No evidence of structural deterioration (S) (U)

All grates are in good condition (S) (U)

No evidence of spalling or cracking of structural parts (S) (U)

No evidence of damage to practice signs (S) (U)

5. Overall Function of Facility (Annual)

No replacement of pipes or catch

Basins required (S) (U)

Evidence of flow bypassing facility (S) (U)

No noticeable odors outside of facility (S) (U)

Check vegetation Condition (S) (U)

Clean and Service Hydrodynamic Separator (S) (U)

(schedule annually)

6. Winter Conditions and Transition Periods (Daily)

Follow winter conditions for Construction between November 15th

and April 1st (S) (U)

After April 1st during spring thaw, If ground remains unstabilized

Extend winter conditions (S) (U)

Prior to November 15th, if freezing occurs and ground remains unstabilized

Extend winter conditions (S) (U)

Comments:

Actions to be Taken:

APPENDIX #5

**STORMWATER MANAGEMENT SYSTEM
MAINTENANCE AGREEMENT**

STORMWATER MANAGEMENT SYSTEM MAINTENANCE AGREEMENT
25 Delaware Avenue Apartments

THIS AGREEMENT ("Agreement") is made and entered into on the ___ day of _____, 2021, by and between 25 Delaware, LLC, with an address at 25 Delaware Avenue, Albany, NY 12209 (hereinafter referred to as the "Facility Owner"), and

CITY OF ALBANY, a municipal corporation with an address at 24 Eagle Street, Albany, New York 12207 (hereinafter referred to as the "City").

WITNESSETH:

WHEREAS, the Facility Owner is the owner of the subject parcel of land in the City of Albany, County of Albany and State of New York as more particularly located at 25 Delaware Avenue, Albany New York.

WHEREAS, the City and the Facility Owner desire that the stormwater management system be built in accordance with the approved project documents and thereafter be maintained, cleaned, repaired, replaced and continued in perpetuity in order to ensure optimum performance of the components; and

WHEREAS, the City has requested this legally binding and enforceable maintenance agreement from the Facility Owner; and

WHEREAS, the Facility Owner is representing the following design documents, with their City approved revisions, as containing all necessary information to construct, operate and maintain the stormwater management system for the lifetime of the facility:

- a. Plan set submitted to the City representing a stormwater management system including stormwater collection, conveyance and storage using structures designed and specified by Hershberg & Hershberg, Consulting Engineers, sealed by Daniel R. Hershberg, P.E., as the Engineer of Record. The plan sheets showing features associated with the stormwater management system are listed below.

Sheet#	Date	Drawing Title
C-2 Existing Conditions Plan	11/20/2020	Existing Conditions 25 Delaware Avenue Apartments
C-3 Demolition Plan	11/20/2020	Demolition Plan 25 Delaware Avenue Apartments
C-4 Site Plan	11/20/2020	Site Plan 25 Delaware Avenue Apartments
C-5 Site Details	11/20/2020	Site Details 25 Delaware Avenue Apartments
C-6 Utility Plan	11/20/2020	Utility Plan 25 Delaware Avenue Apartments
C-7 Utility Details	11/20/2020	Utility Details 25 Delaware Avenue Apartments
C-8 Utility Profiles	11/20/2020	Utility Profiles 25 Delaware Avenue Apartments
C-9 Erosion and Sediment Control Plan	11/20/2020	Erosion and Sediment Control Plan 25 Delaware Avenue Apartments
C-10 Erosion and Sediment Control Plan Details	11/20/2020	Erosion and Sediment Control Plan Details 25 Delaware Avenue Apartments

b. *STORM WATER POLLUTION PREVENTION PLAN (SWPPP) & STORM WATER MANAGEMENT REPORT (SWMR)*, Proposed Gymnasium prepared by Hershberg & Hershberg, Consulting Engineers and Land Surveyors, September 18, 2018, Revised October 29, 2018

IN CONSIDERATION THEREOF, the parties agree as follow:

1. The Facility Owner shall be responsible for maintaining the storm water facility in a manner to prevent silt from becoming tributary to the City's storm water drainage system.
2. Operation and maintenance, including inspection and cleaning of the full storm water drainage system, shall be the responsibility of the Facility Owner.
3. In the event the Facility Owner fails to maintain the system in a manner to control storm water the City may order the system cleaned and bill the Facility Owner the full cost of this work at labor cost (direct labor plus 50% salary burden) and materials (at cost) if work is performed by the Department of Water & Water Supply; or the cost of a subcontractor plus 10% of the subcontractor's bill if the Department of Water & Water Supply obtains a subcontractor to perform the work. Invoices are payable to the Department of Water & Water Supply within ten (10) business days from the date of invoice. In the event payment for costs is not received within said ten (10) day period, the Department of Water & Water Supply shall have the right to file a lien in the amount of the invoice, together with reasonable costs of collection incurred in connection therewith, against the property of the Facility Owner.
4. The City has the right to access the premises for periodic inspections and to perform any maintenance of the stormwater system.
5. The Facility Owner shall disclose this Agreement to any successor or assignees in interest.
6. This Agreement is binding on the Facility Owner and any successor or assignees in interest hereof.
7. Facility Owner agrees to defend, indemnify, and save harmless the CITY and its officers, employees and agents, from and against all claims, actions, causes of action, injuries, damages, losses, liabilities, and expenses (including, without limitation, reasonable attorney's fees and court costs) arising out of, or in consequence of, any negligent or intentional act or omission of Facility Owner to the extent of its or their responsibility for such claims, actions, causes of action, injuries, damages, losses, liabilities, and expenses. The provisions of this Article shall survive any termination or expiration of this Agreement.

[Signatures on next page]

IN WITNESS WHEREOF, the parties hereto have caused this Agreement to be signed by their duly authorized officers as of the day and year first above written.

CITY OF ALBANY, NEW ORK

BY: _____
KATHY M. SHEEHAN
MAYOR, CITY OF ALBANY

25 DELAWARE, LLC

BY _____-

STATE OF NEW YORK)
) ss.:
COUNTY OF ALBANY)

On the _ day of _____, 201_, before me the undersigned, a Notary Public in and for said State, personally appeared _____, personally known to me or proved to me on the basis of satisfactory evidence to be the individual whose name is subscribed to the within instrument and acknowledged to me that he executed the same in his capacity, and that by his signature on the instrument, the individual, or person upon behalf of which the individual acted, executed the instrument.

Notary Public

STATE OF NEW YORK)
) ss.:
COUNTY OF ALBANY)

On the _ day of _____, 201_, before me the undersigned, a Notary Public in and for said State, personally appeared _____, personally known to me or proved to me on the basis of satisfactory evidence to be the individual whose name is subscribed to the within instrument and acknowledged to me that he executed the same in his capacity, and that by his signature on the instrument, the individual, or person upon behalf of which the individual acted, executed the instrument.


Notary Public

APPENDIX #6


HydroCAD 10.0 CALCULATIONS



Reach 1




Trib A



Subcat



Reach



Pond



Link

Routing Diagram for 180244-1 PRE

Prepared by {enter your company name here}, Printed 11/24/2020
HydroCAD® 10.00 s/n 03289 © 2012 HydroCAD Software Solutions LLC

180244-1 PRE

Area Listing (all nodes)

Area (acres)	CN	Description (subcatchment-numbers)
0.779	74	>75% Grass cover, Good, HSG C (A)
0.779	74	TOTAL AREA

Soil Listing (all nodes)

Area (acres)	Soil Group	Subcatchment Numbers
0.000	HSG A	
0.000	HSG B	
0.779	HSG C	A
0.000	HSG D	
0.000	Other	
0.779		TOTAL AREA

180244-1 PRE

Prepared by {enter your company name here}

HydroCAD® 10.00 s/n 03289 © 2012 HydroCAD Software Solutions LLC

Printed 11/24/2020

Page 4

Ground Covers (all nodes)

HSG-A (acres)	HSG-B (acres)	HSG-C (acres)	HSG-D (acres)	Other (acres)	Total (acres)	Ground Cover	Subcatchment Numbers
0.000	0.000	0.779	0.000	0.000	0.779	>75% Grass cover, Good	A
0.000	0.000	0.779	0.000	0.000	0.779	TOTAL AREA	

180244-1 PRE

Type II 24-hr 10 Year Rainfall=4.50"

Prepared by {enter your company name here}

Printed 11/24/2020

HydroCAD® 10.00 s/n 03289 © 2012 HydroCAD Software Solutions LLC

Page 5

Time span=0.00-30.00 hrs, dt=0.05 hrs, 601 points

Runoff by SCS TR-20 method, UH=SCS

Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment A: Trib A

Runoff Area=33,925 sf 0.00% Impervious Runoff Depth=1.97"
Flow Length=240' Tc=8.4 min CN=74 Runoff=2.48 cfs 0.128 af

Reach R1: Reach 1

Inflow=2.48 cfs 0.128 af
Outflow=2.48 cfs 0.128 af

Total Runoff Area = 0.779 ac Runoff Volume = 0.128 af Average Runoff Depth = 1.97"
100.00% Pervious = 0.779 ac 0.00% Impervious = 0.000 ac

Summary for Subcatchment A: Trib A

Runoff = 2.48 cfs @ 12.00 hrs, Volume= 0.128 af, Depth= 1.97"


Runoff by SCS TR-20 method, UH=SCS, Time Span= 0.00-30.00 hrs, dt= 0.05 hrs
 Type II 24-hr 10 Year Rainfall=4.50"

Area (sf)	CN	Description
33,925	74	>75% Grass cover, Good, HSG C
33,925		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
7.9	100	0.0450	0.21		Sheet Flow, Grass Grass: Short n= 0.150 P2= 2.60"
0.5	140	0.0710	4.29		Shallow Concentrated Flow, Grass Unpaved Kv= 16.1 fps
8.4	240	Total			

Subcatchment A: Trib A

Hydrograph

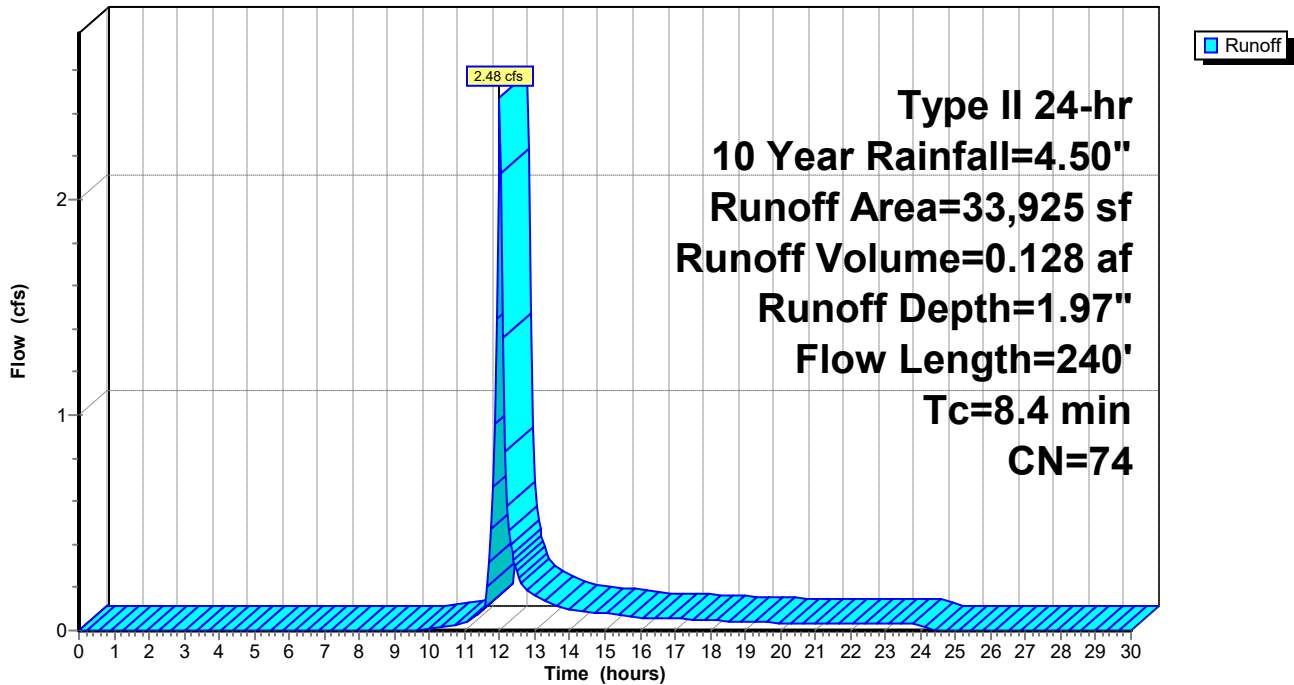


Summary for Reach R1: Reach 1

[40] Hint: Not Described (Outflow=Inflow)

Inflow Area = 0.779 ac, 0.00% Impervious, Inflow Depth = 1.97" for 10 Year event
Inflow = 2.48 cfs @ 12.00 hrs, Volume= 0.128 af
Outflow = 2.48 cfs @ 12.00 hrs, Volume= 0.128 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-30.00 hrs, dt= 0.05 hrs

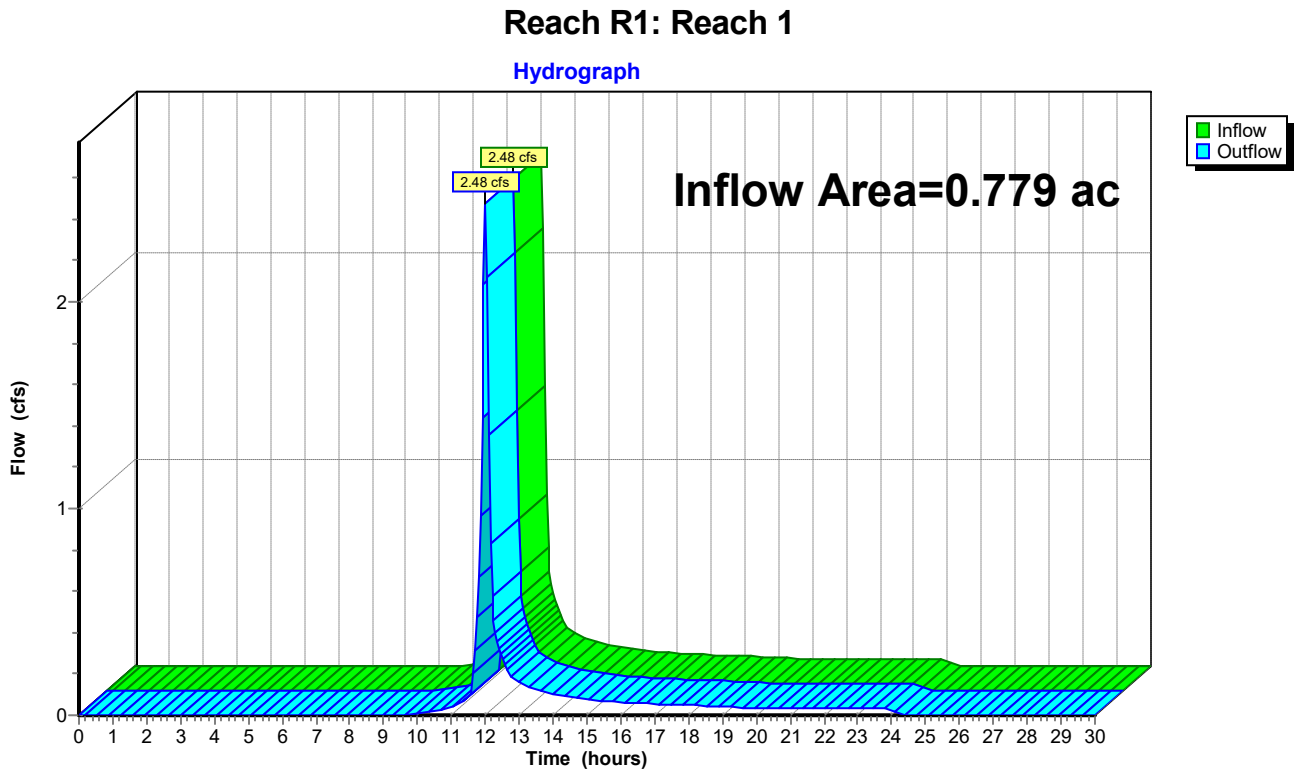

Time span=0.00-30.00 hrs, dt=0.05 hrs, 601 points

Runoff by SCS TR-20 method, UH=SCS

Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment A: Trib A

Runoff Area=33,925 sf 0.00% Impervious Runoff Depth=4.04"
Flow Length=240' Tc=8.4 min CN=74 Runoff=5.04 cfs 0.262 af

Reach R1: Reach 1

Inflow=5.04 cfs 0.262 af
Outflow=5.04 cfs 0.262 af

Total Runoff Area = 0.779 ac Runoff Volume = 0.262 af Average Runoff Depth = 4.04"
100.00% Pervious = 0.779 ac 0.00% Impervious = 0.000 ac

Summary for Subcatchment A: Trib A

Runoff = 5.04 cfs @ 12.00 hrs, Volume= 0.262 af, Depth= 4.04"


Runoff by SCS TR-20 method, UH=SCS, Time Span= 0.00-30.00 hrs, dt= 0.05 hrs
 Type II 24-hr 100 Year Rainfall=7.00"

Area (sf)	CN	Description
33,925	74	>75% Grass cover, Good, HSG C
33,925		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
7.9	100	0.0450	0.21		Sheet Flow, Grass Grass: Short n= 0.150 P2= 2.60"
0.5	140	0.0710	4.29		Shallow Concentrated Flow, Grass Unpaved Kv= 16.1 fps
8.4	240	Total			

Subcatchment A: Trib A

Hydrograph

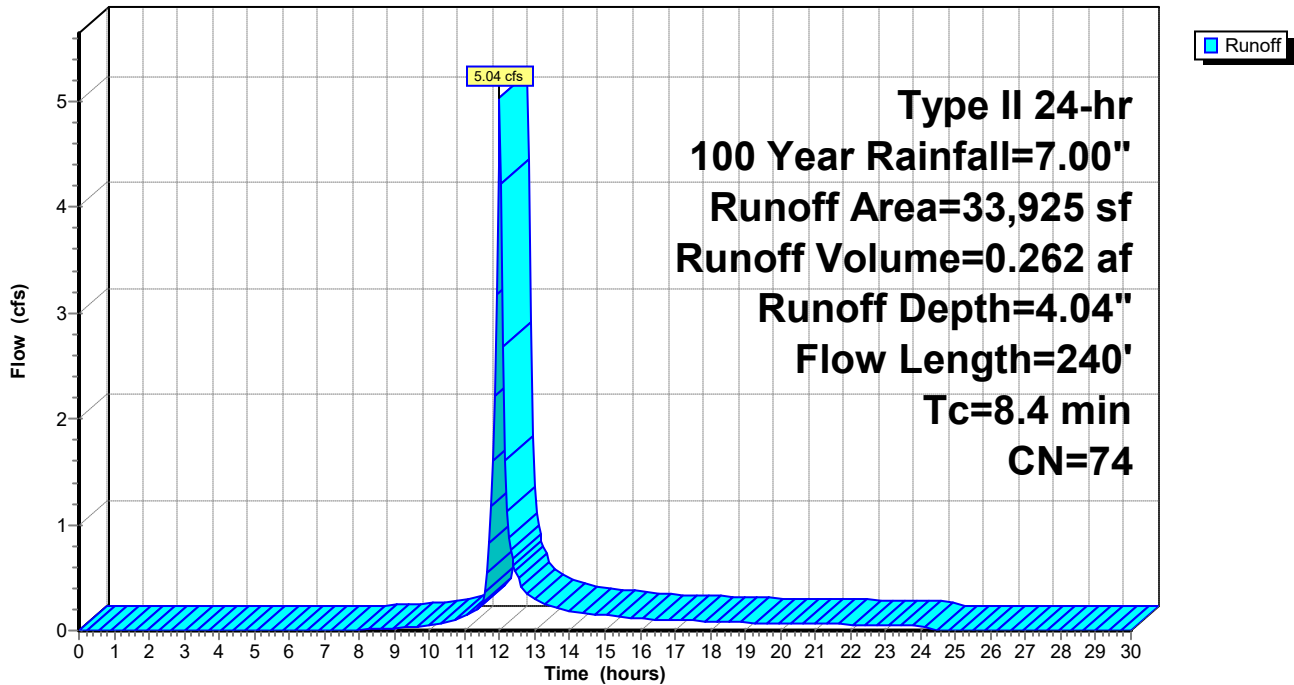

Summary for Reach R1: Reach 1


[40] Hint: Not Described (Outflow=Inflow)




Inflow Area = 0.779 ac, 0.00% Impervious, Inflow Depth = 4.04" for 100 Year event
Inflow = 5.04 cfs @ 12.00 hrs, Volume= 0.262 af
Outflow = 5.04 cfs @ 12.00 hrs, Volume= 0.262 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-30.00 hrs, dt= 0.05 hrs

Reach R1: Reach 1

Hydrograph

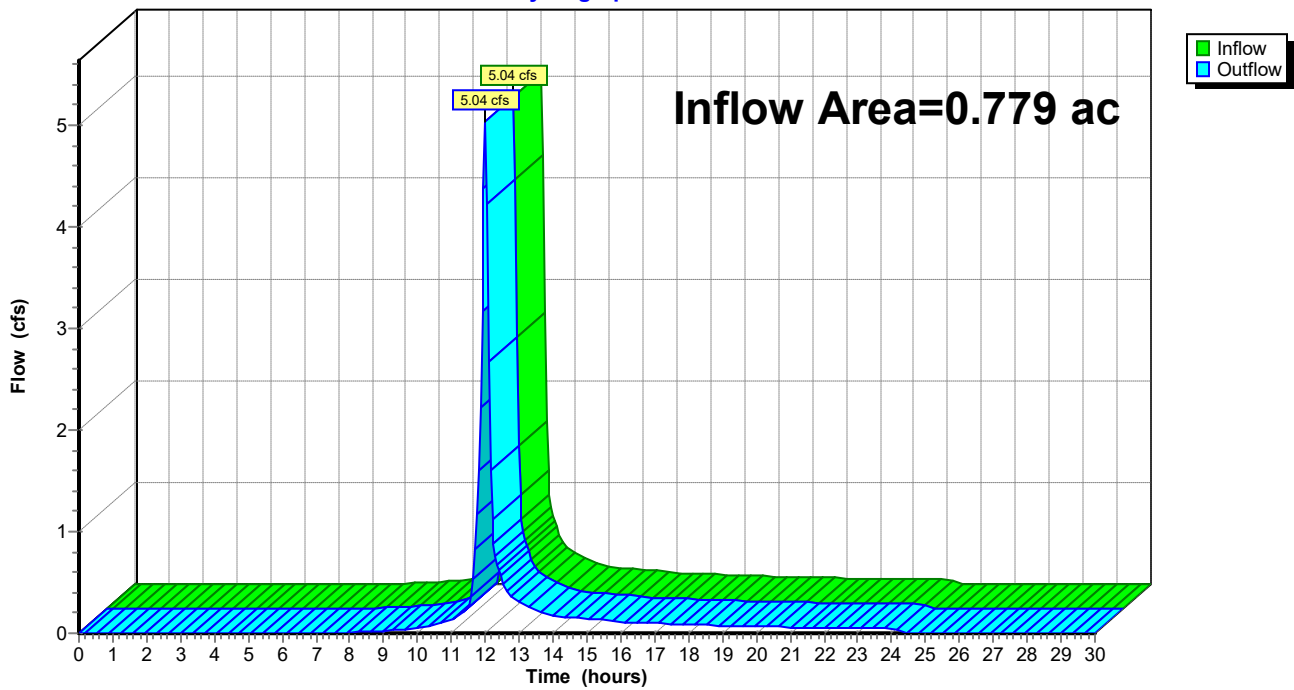

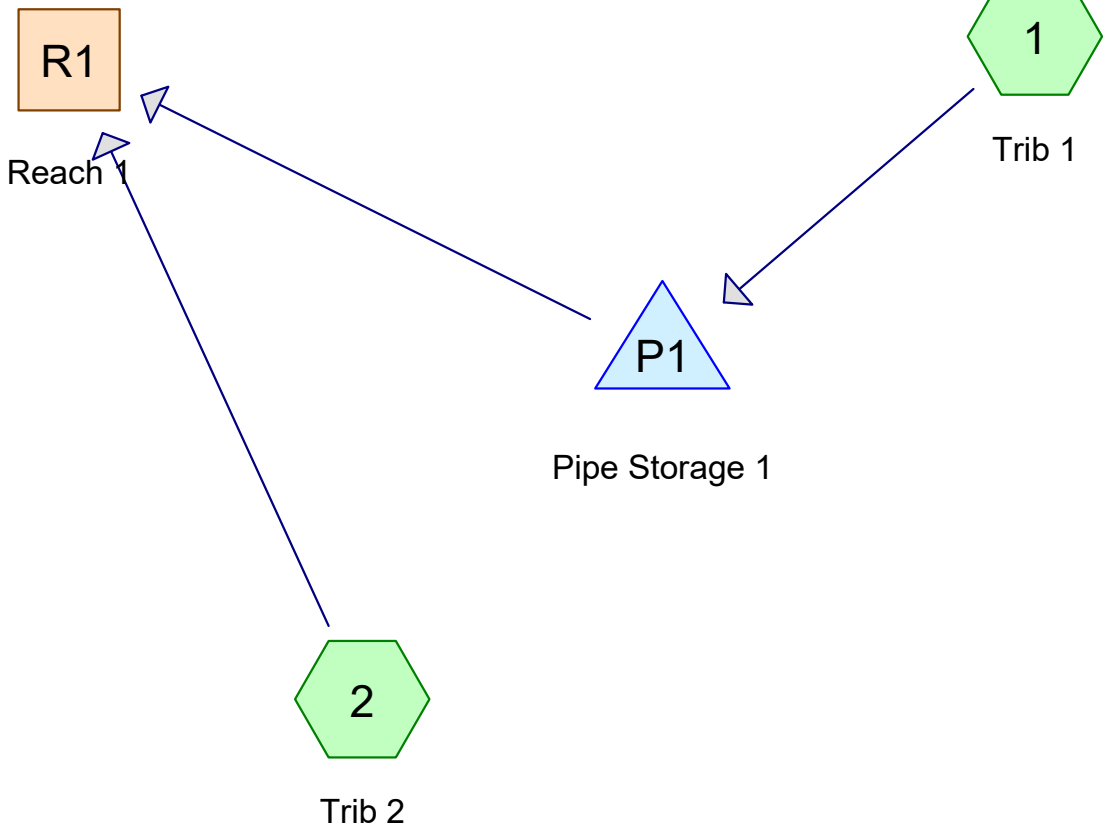

180244-1 POST

Area Listing (all nodes)

Area (acres)	CN	Description (subcatchment-numbers)
0.353	74	>75% Grass cover, Good, HSG C (1, 2)
0.094	98	Paved parking, HSG C (1, 2)
0.332	98	Unconnected roofs, HSG C (1)
0.779	87	TOTAL AREA

180244-1 POST

Prepared by {enter your company name here}

HydroCAD® 10.00 s/n 03289 © 2012 HydroCAD Software Solutions LLC

Printed 11/24/2020

Page 3

Soil Listing (all nodes)

Area (acres)	Soil Group	Subcatchment Numbers
0.000	HSG A	
0.000	HSG B	
0.779	HSG C	1, 2
0.000	HSG D	
0.000	Other	
0.779		TOTAL AREA

180244-1 POST

Prepared by {enter your company name here}

Printed 11/24/2020

HydroCAD® 10.00 s/n 03289 © 2012 HydroCAD Software Solutions LLC

Page 4

Ground Covers (all nodes)

HSG-A (acres)	HSG-B (acres)	HSG-C (acres)	HSG-D (acres)	Other (acres)	Total (acres)	Ground Cover	Subcatchment Numbers
0.000	0.000	0.353	0.000	0.000	0.353	>75% Grass cover, Good	1, 2
0.000	0.000	0.094	0.000	0.000	0.094	Paved parking	1, 2
0.000	0.000	0.332	0.000	0.000	0.332	Unconnected roofs	1
0.000	0.000	0.779	0.000	0.000	0.779	TOTAL AREA	

180244-1 POST

Prepared by {enter your company name here}

Printed 11/24/2020

HydroCAD® 10.00 s/n 03289 © 2012 HydroCAD Software Solutions LLC

Page 5

Pipe Listing (all nodes)

Line#	Node Number	In-Invert (feet)	Out-Invert (feet)	Length (feet)	Slope (ft/ft)	n	Diam/Width (inches)	Height (inches)	Inside-Fill (inches)
1	1	0.00	0.00	40.0	0.0260	0.013	12.0	0.0	0.0

180244-1 POST

Type II 24-hr 1.00 hrs 1 hour Rainfall=0.20"

Prepared by {enter your company name here}

Printed 11/24/2020

HydroCAD® 10.00 s/n 03289 © 2012 HydroCAD Software Solutions LLC

Page 6

Time span=0.00-30.00 hrs, dt=0.01 hrs, 3001 points

Runoff by SCS TR-20 method, UH=SCS

Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment 1: Trib 1

Runoff Area=28,289 sf 64.07% Impervious Runoff Depth=0.00"
Flow Length=133' Tc=3.2 min CN=89 Runoff=0.00 cfs 0.000 af

Subcatchment 2: Trib 2

Runoff Area=5,636 sf 7.63% Impervious Runoff Depth=0.00"
Flow Length=140' Slope=0.0290 '/' Tc=12.3 min CN=76 Runoff=0.00 cfs 0.000 af

Reach R1: Reach 1

Inflow=0.00 cfs 0.000 af
Outflow=0.00 cfs 0.000 af

Pond P1: Pipe Storage 1

Peak Elev=178.00' Storage=0.000 af Inflow=0.00 cfs 0.000 af
Outflow=0.00 cfs 0.000 af

Total Runoff Area = 0.779 ac Runoff Volume = 0.000 af Average Runoff Depth = 0.00"
45.31% Pervious = 0.353 ac 54.69% Impervious = 0.426 ac

Summary for Subcatchment 1: Trib 1

[45] Hint: Runoff=Zero

Runoff = 0.00 cfs @ 0.00 hrs, Volume= 0.000 af, Depth= 0.00"


Runoff by SCS TR-20 method, UH=SCS, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Type II 24-hr 1.00 hrs 1 hour Rainfall=0.20"

Area (sf)	CN	Description
3,660	98	Paved parking, HSG C
10,164	74	>75% Grass cover, Good, HSG C
14,465	98	Unconnected roofs, HSG C
28,289	89	Weighted Average
10,164		35.93% Pervious Area
18,125		64.07% Impervious Area
14,465		79.81% Unconnected

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
3.0	50	0.1200	0.27		Sheet Flow, Grass Grass: Short n= 0.150 P2= 2.60"
0.1	40	0.0260	7.31	5.74	Pipe Channel, Pipe 12.0" Round Area= 0.8 sf Perim= 3.1' r= 0.25' n= 0.013 Corrugated PE, smooth interior
0.1	43	0.0700	5.37		Shallow Concentrated Flow, PAVE Paved Kv= 20.3 fps
3.2	133	Total			

Subcatchment 1: Trib 1

Hydrograph

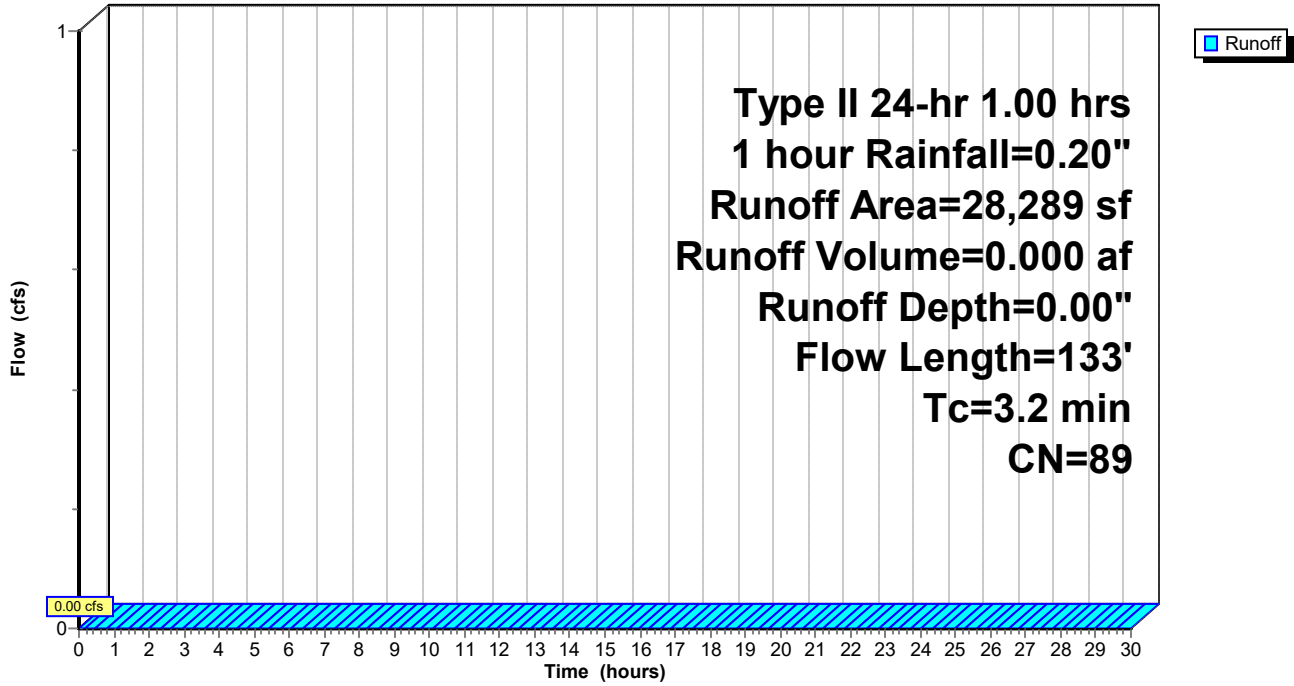

Summary for Subcatchment 2: Trib 2

[45] Hint: Runoff=Zero

Runoff = 0.00 cfs @ 0.00 hrs, Volume= 0.000 af, Depth= 0.00"


Runoff by SCS TR-20 method, UH=SCS, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Type II 24-hr 1.00 hrs 1 hour Rainfall=0.20"

Area (sf)	CN	Description
5,206	74	>75% Grass cover, Good, HSG C
430	98	Paved parking, HSG C
5,636	76	Weighted Average
5,206		92.37% Pervious Area
430		7.63% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
12.3	140	0.0290	0.19		Sheet Flow, Grass Grass: Short n= 0.150 P2= 2.60"

Subcatchment 2: Trib 2

Hydrograph

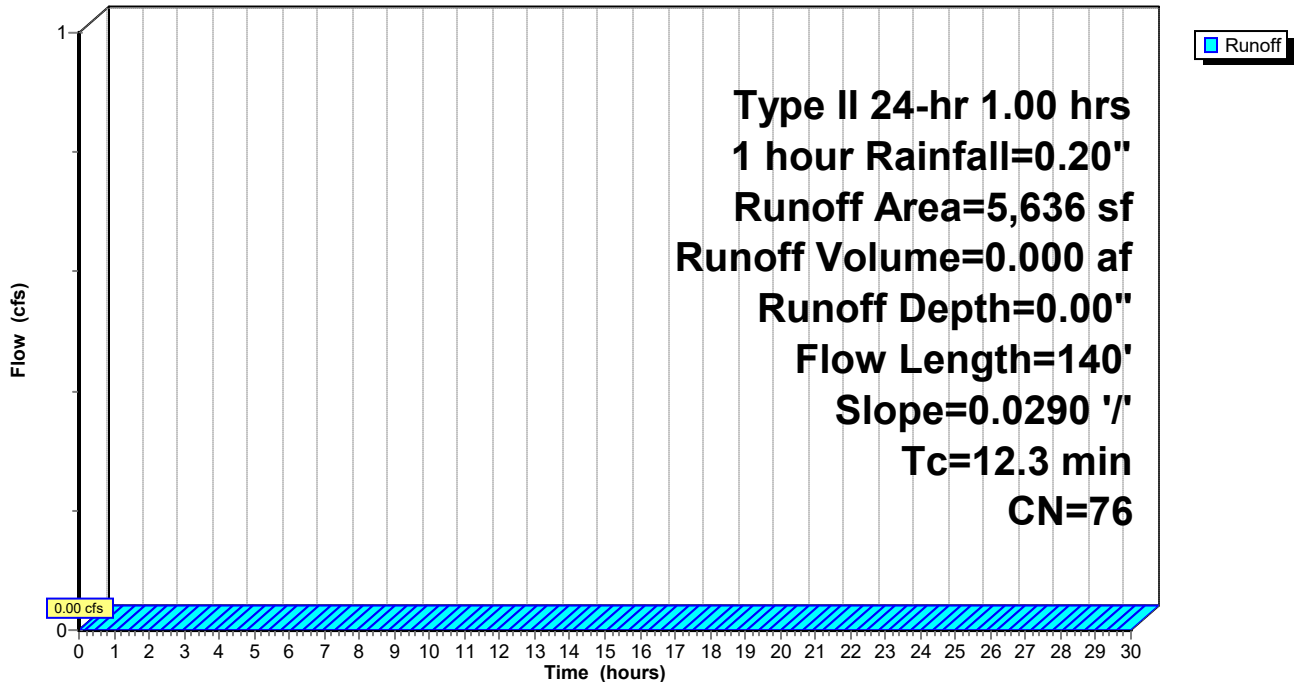

Summary for Reach R1: Reach 1


[40] Hint: Not Described (Outflow=Inflow)

Inflow Area = 0.779 ac, 54.69% Impervious, Inflow Depth = 0.00" for 1 hour event
Inflow = 0.00 cfs @ 0.00 hrs, Volume= 0.000 af
Outflow = 0.00 cfs @ 0.00 hrs, Volume= 0.000 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs

Reach R1: Reach 1

Hydrograph

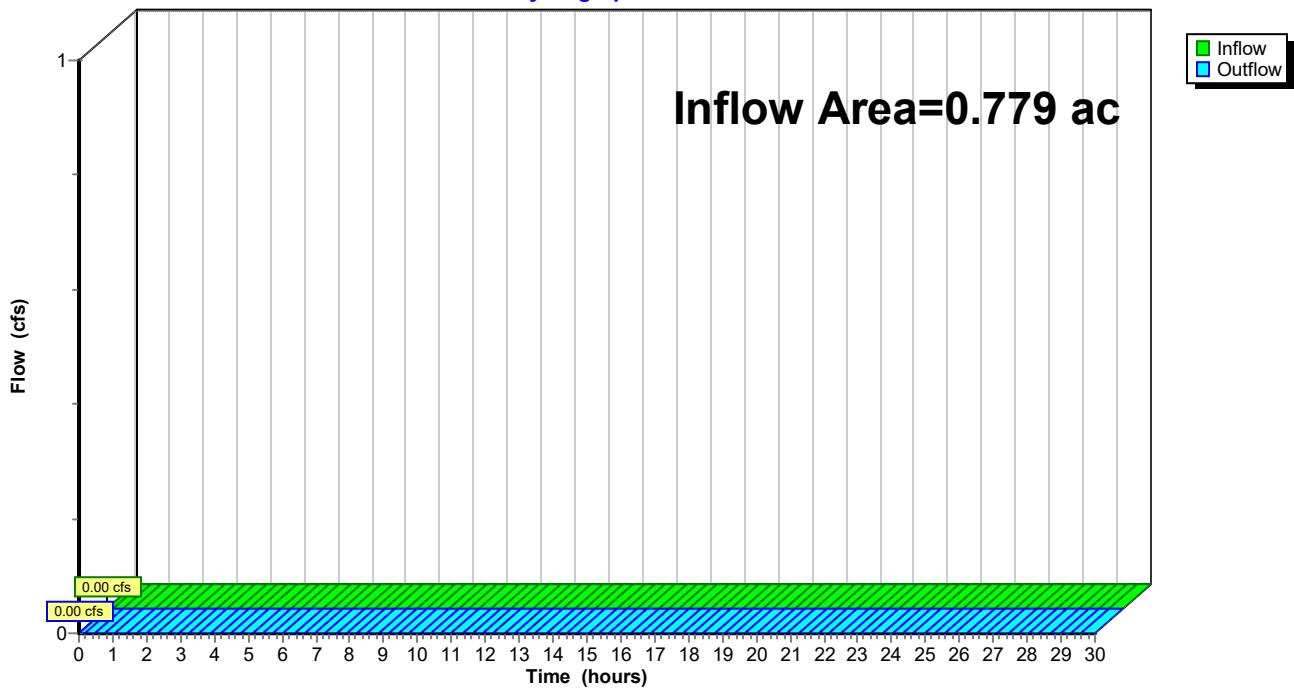

Summary for Pond P1: Pipe Storage 1

Inflow Area = 0.649 ac, 64.07% Impervious, Inflow Depth = 0.00" for 1 hour event
 Inflow = 0.00 cfs @ 0.00 hrs, Volume= 0.000 af
 Outflow = 0.00 cfs @ 0.00 hrs, Volume= 0.000 af, Atten= 0%, Lag= 0.0 min
 Primary = 0.00 cfs @ 0.00 hrs, Volume= 0.000 af

Routing by Stor-Ind method, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Peak Elev= 178.00' @ 0.00 hrs Surf.Area= 0.000 ac Storage= 0.000 af

Plug-Flow detention time= (not calculated: initial storage exceeds outflow)
 Center-of-Mass det. time= (not calculated: no inflow)


Volume	Invert	Avail.Storage	Storage Description
#1	178.00'	0.104 af	48.0" D x 120.0'L Pipe Storage S= 0.0010 ' /' x 3
#2	178.00'	0.009 af	48.0" D x 16.0'L Pipe Storage x 2
		0.113 af	Total Available Storage

Device	Routing	Invert	Outlet Devices
#1	Primary	178.00'	6.0" Vert. Orifice/Grate C= 0.600

Primary OutFlow Max=0.00 cfs @ 0.00 hrs HW=178.00' (Free Discharge)
 ↑1=Orifice/Grate (Controls 0.00 cfs)

Pond P1: Pipe Storage 1

Hydrograph

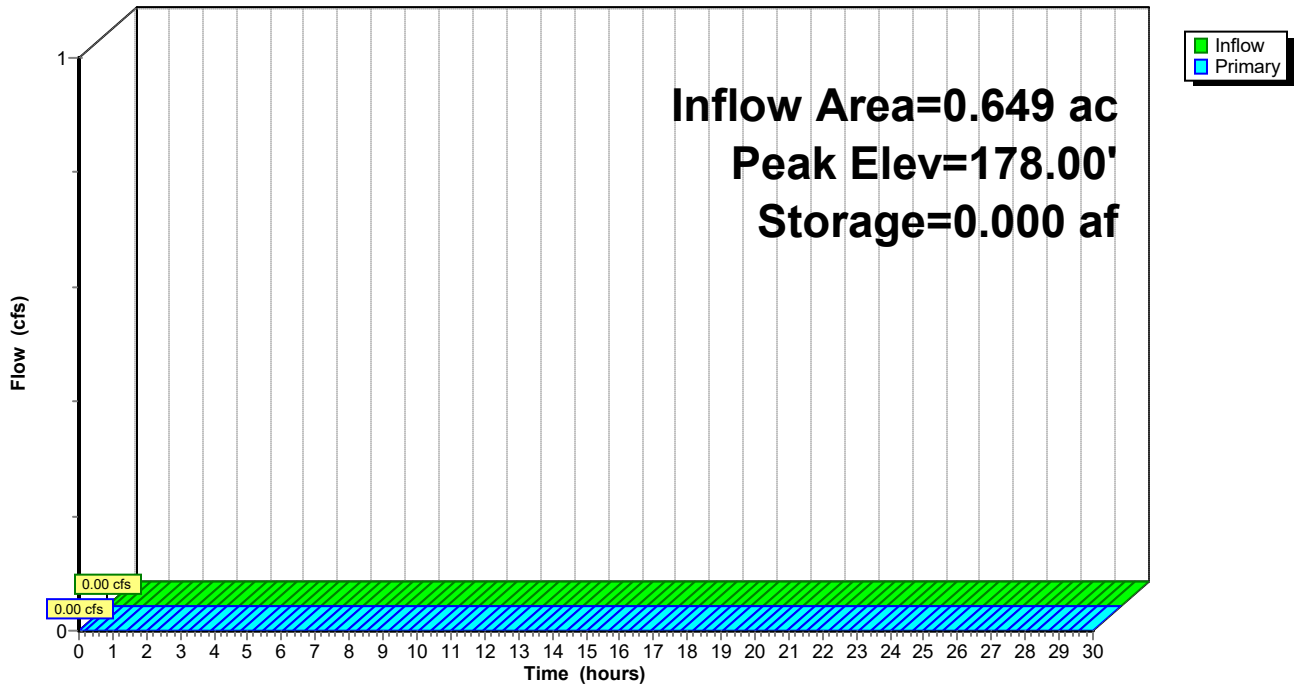

180244-1 POST

Type II 24-hr 10 Year Rainfall=4.50"

Prepared by {enter your company name here}

Printed 11/24/2020

HydroCAD® 10.00 s/n 03289 © 2012 HydroCAD Software Solutions LLC

Page 12

Time span=0.00-30.00 hrs, dt=0.01 hrs, 3001 points

Runoff by SCS TR-20 method, UH=SCS

Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment 1: Trib 1

Runoff Area=28,289 sf 64.07% Impervious Runoff Depth=3.30"
Flow Length=133' Tc=3.2 min CN=89 Runoff=3.98 cfs 0.178 af

Subcatchment 2: Trib 2

Runoff Area=5,636 sf 7.63% Impervious Runoff Depth=2.13"
Flow Length=140' Slope=0.0290 '/' Tc=12.3 min CN=76 Runoff=0.39 cfs 0.023 af

Reach R1: Reach 1

Inflow=1.59 cfs 0.201 af
Outflow=1.59 cfs 0.201 af

Pond P1: Pipe Storage 1

Peak Elev=179.87' Storage=0.050 af Inflow=3.98 cfs 0.178 af
Outflow=1.20 cfs 0.178 af

Total Runoff Area = 0.779 ac Runoff Volume = 0.201 af Average Runoff Depth = 3.10"
45.31% Pervious = 0.353 ac 54.69% Impervious = 0.426 ac

Summary for Subcatchment 1: Trib 1

Runoff = 3.98 cfs @ 11.94 hrs, Volume= 0.178 af, Depth= 3.30"


Runoff by SCS TR-20 method, UH=SCS, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Type II 24-hr 10 Year Rainfall=4.50"

Area (sf)	CN	Description
3,660	98	Paved parking, HSG C
10,164	74	>75% Grass cover, Good, HSG C
14,465	98	Unconnected roofs, HSG C
28,289	89	Weighted Average
10,164		35.93% Pervious Area
18,125		64.07% Impervious Area
14,465		79.81% Unconnected

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
3.0	50	0.1200	0.27		Sheet Flow, Grass Grass: Short n= 0.150 P2= 2.60"
0.1	40	0.0260	7.31	5.74	Pipe Channel, Pipe 12.0" Round Area= 0.8 sf Perim= 3.1' r= 0.25' n= 0.013 Corrugated PE, smooth interior
0.1	43	0.0700	5.37		Shallow Concentrated Flow, PAVE Paved Kv= 20.3 fps
3.2	133	Total			

Subcatchment 1: Trib 1

Hydrograph

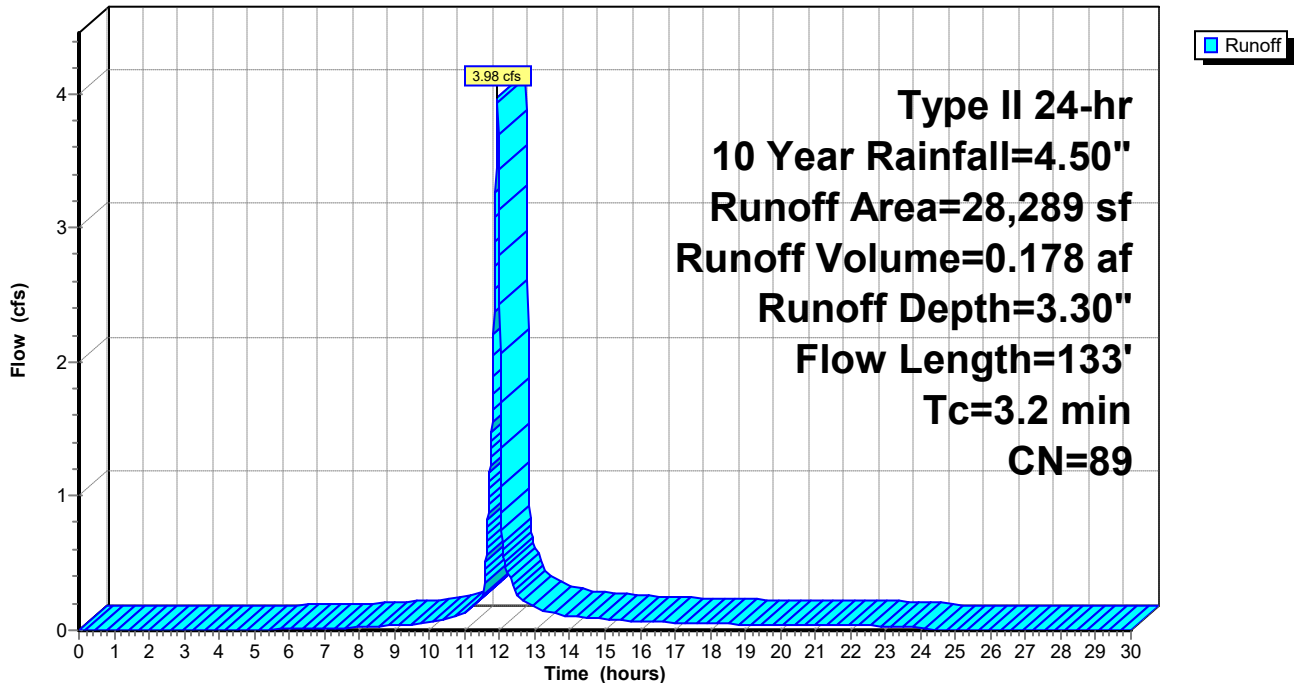

Summary for Subcatchment 2: Trib 2

Runoff = 0.39 cfs @ 12.04 hrs, Volume= 0.023 af, Depth= 2.13"


Runoff by SCS TR-20 method, UH=SCS, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Type II 24-hr 10 Year Rainfall=4.50"

Area (sf)	CN	Description
5,206	74	>75% Grass cover, Good, HSG C
430	98	Paved parking, HSG C
5,636	76	Weighted Average
5,206		92.37% Pervious Area
430		7.63% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
12.3	140	0.0290	0.19		Sheet Flow, Grass Grass: Short n= 0.150 P2= 2.60"

Subcatchment 2: Trib 2

Hydrograph

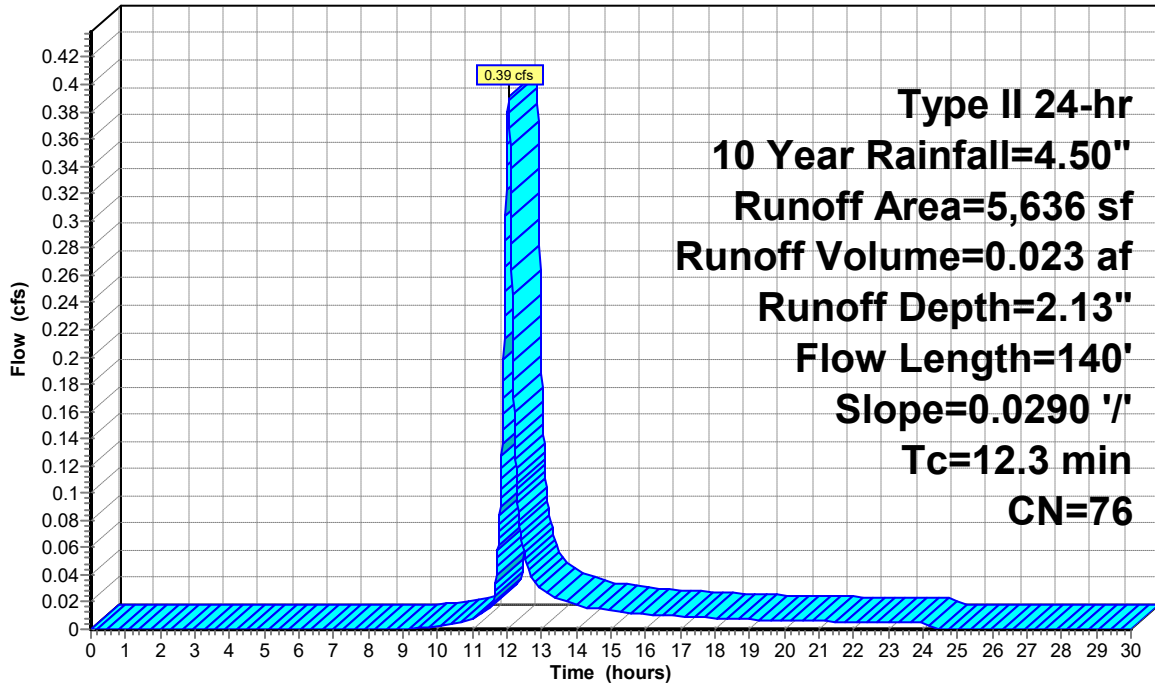


Runoff

Summary for Reach R1: Reach 1

[40] Hint: Not Described (Outflow=Inflow)

Inflow Area = 0.779 ac, 54.69% Impervious, Inflow Depth = 3.10" for 10 Year event
Inflow = 1.59 cfs @ 12.04 hrs, Volume= 0.201 af
Outflow = 1.59 cfs @ 12.04 hrs, Volume= 0.201 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs

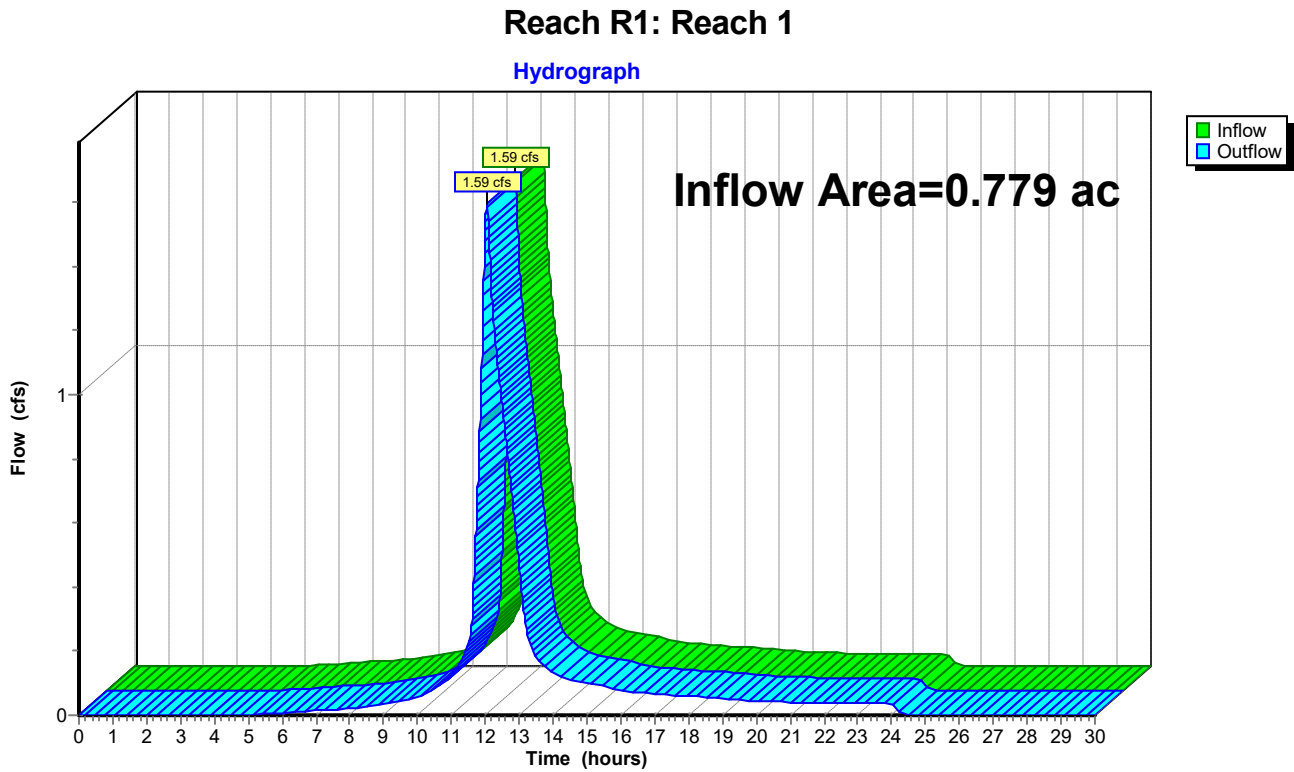

Summary for Pond P1: Pipe Storage 1

Inflow Area = 0.649 ac, 64.07% Impervious, Inflow Depth = 3.30" for 10 Year event
 Inflow = 3.98 cfs @ 11.94 hrs, Volume= 0.178 af
 Outflow = 1.20 cfs @ 12.04 hrs, Volume= 0.178 af, Atten= 70%, Lag= 5.9 min
 Primary = 1.20 cfs @ 12.04 hrs, Volume= 0.178 af

Routing by Stor-Ind method, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Peak Elev= 179.87' @ 12.04 hrs Surf.Area= 0.036 ac Storage= 0.050 af

Plug-Flow detention time= 15.3 min calculated for 0.178 af (100% of inflow)
 Center-of-Mass det. time= 15.3 min (807.7 - 792.4)


Volume	Invert	Avail.Storage	Storage Description
#1	178.00'	0.104 af	48.0" D x 120.0'L Pipe Storage S= 0.0010 ' /' x 3
#2	178.00'	0.009 af	48.0" D x 16.0'L Pipe Storage x 2
		0.113 af	Total Available Storage

Device	Routing	Invert	Outlet Devices
#1	Primary	178.00'	6.0" Vert. Orifice/Grate C= 0.600

Primary OutFlow Max=1.20 cfs @ 12.04 hrs HW=179.87' (Free Discharge)
 ↳ **Orifice/Grate** (Orifice Controls 1.20 cfs @ 6.13 fps)

Pond P1: Pipe Storage 1

Hydrograph

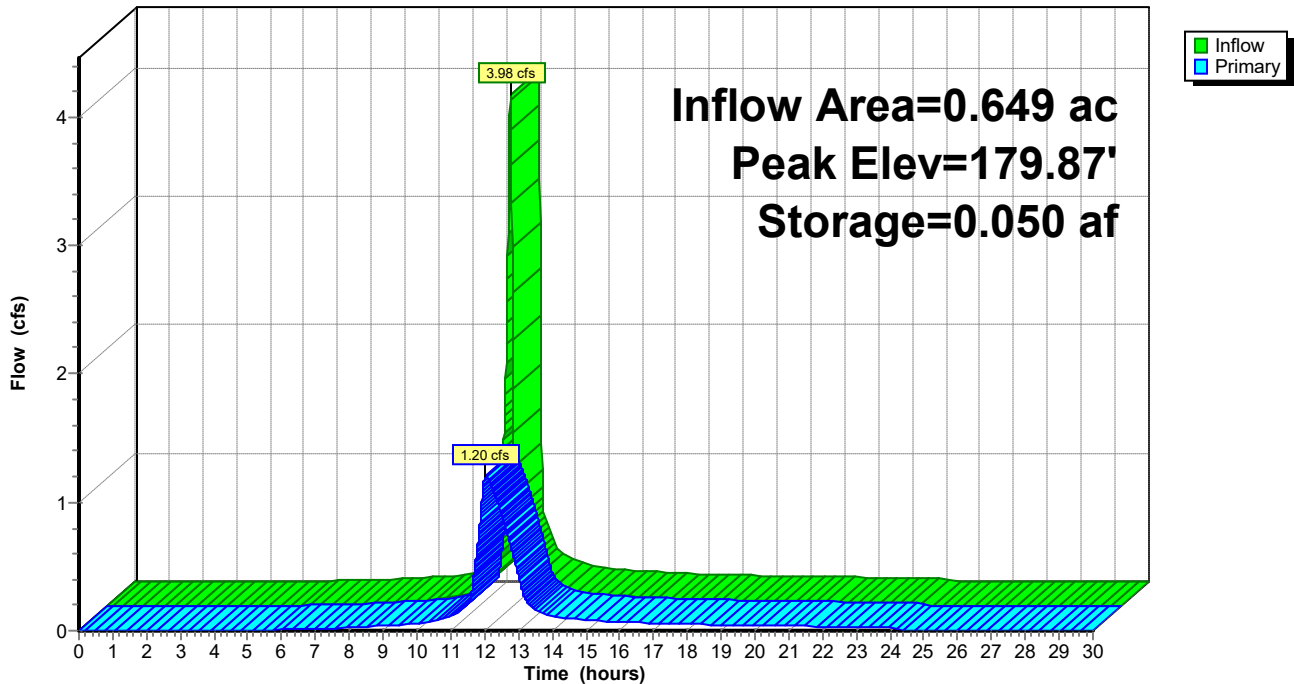

180244-1 POST

Type II 24-hr 100 Year Rainfall=7.00"

Prepared by {enter your company name here}

Printed 11/24/2020

HydroCAD® 10.00 s/n 03289 © 2012 HydroCAD Software Solutions LLC

Page 17

Time span=0.00-30.00 hrs, dt=0.01 hrs, 3001 points

Runoff by SCS TR-20 method, UH=SCS

Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment 1: Trib 1

Runoff Area=28,289 sf 64.07% Impervious Runoff Depth=5.71"
Flow Length=133' Tc=3.2 min CN=89 Runoff=6.63 cfs 0.309 af

Subcatchment 2: Trib 2

Runoff Area=5,636 sf 7.63% Impervious Runoff Depth=4.26"
Flow Length=140' Slope=0.0290 '/' Tc=12.3 min CN=76 Runoff=0.78 cfs 0.046 af

Reach R1: Reach 1

Inflow=2.40 cfs 0.355 af
Outflow=2.40 cfs 0.355 af

Pond P1: Pipe Storage 1

Peak Elev=181.18' Storage=0.095 af Inflow=6.63 cfs 0.309 af
Outflow=1.62 cfs 0.309 af

Total Runoff Area = 0.779 ac Runoff Volume = 0.355 af Average Runoff Depth = 5.47"
45.31% Pervious = 0.353 ac 54.69% Impervious = 0.426 ac

Summary for Subcatchment 1: Trib 1

Runoff = 6.63 cfs @ 11.94 hrs, Volume= 0.309 af, Depth= 5.71"


Runoff by SCS TR-20 method, UH=SCS, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Type II 24-hr 100 Year Rainfall=7.00"

Area (sf)	CN	Description
3,660	98	Paved parking, HSG C
10,164	74	>75% Grass cover, Good, HSG C
14,465	98	Unconnected roofs, HSG C
28,289	89	Weighted Average
10,164		35.93% Pervious Area
18,125		64.07% Impervious Area
14,465		79.81% Unconnected

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
3.0	50	0.1200	0.27		Sheet Flow, Grass Grass: Short n= 0.150 P2= 2.60"
0.1	40	0.0260	7.31	5.74	Pipe Channel, Pipe 12.0" Round Area= 0.8 sf Perim= 3.1' r= 0.25' n= 0.013 Corrugated PE, smooth interior
0.1	43	0.0700	5.37		Shallow Concentrated Flow, PAVE Paved Kv= 20.3 fps
3.2	133	Total			

Subcatchment 1: Trib 1

Hydrograph

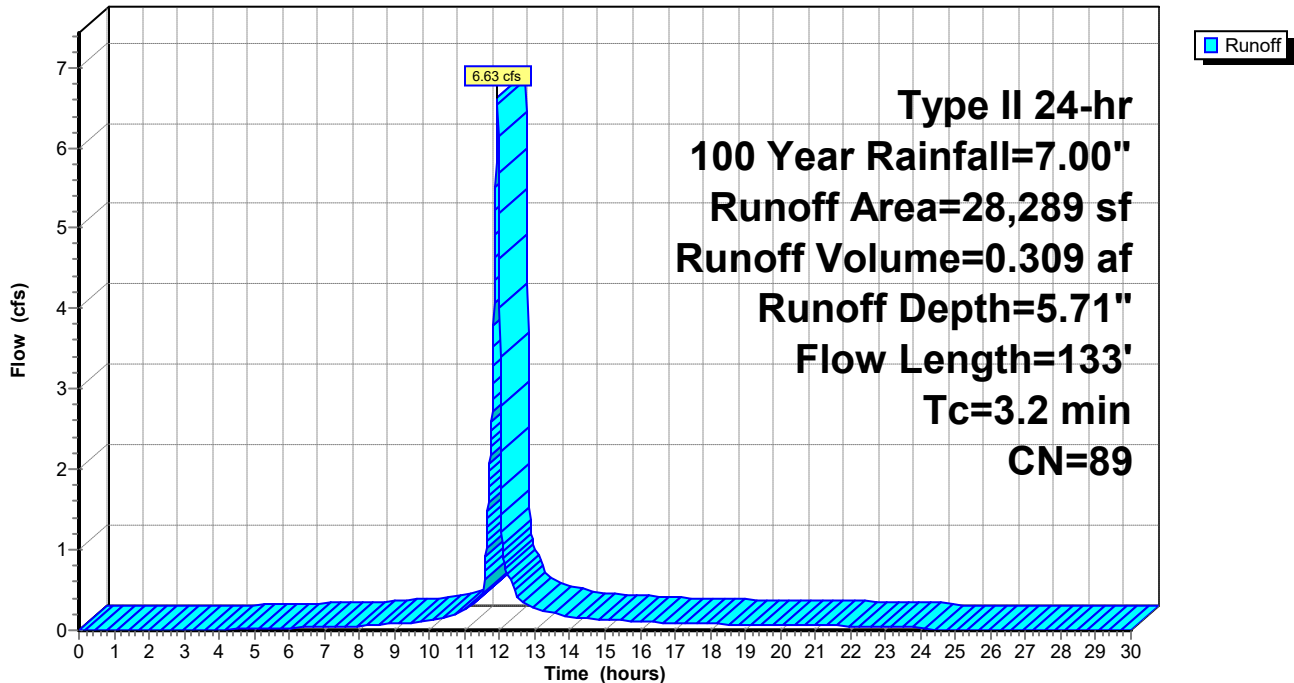

Summary for Subcatchment 2: Trib 2

Runoff = 0.78 cfs @ 12.04 hrs, Volume= 0.046 af, Depth= 4.26"


Runoff by SCS TR-20 method, UH=SCS, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Type II 24-hr 100 Year Rainfall=7.00"

Area (sf)	CN	Description
5,206	74	>75% Grass cover, Good, HSG C
430	98	Paved parking, HSG C
5,636	76	Weighted Average
5,206		92.37% Pervious Area
430		7.63% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
12.3	140	0.0290	0.19		Sheet Flow, Grass Grass: Short n= 0.150 P2= 2.60"

Subcatchment 2: Trib 2

Hydrograph

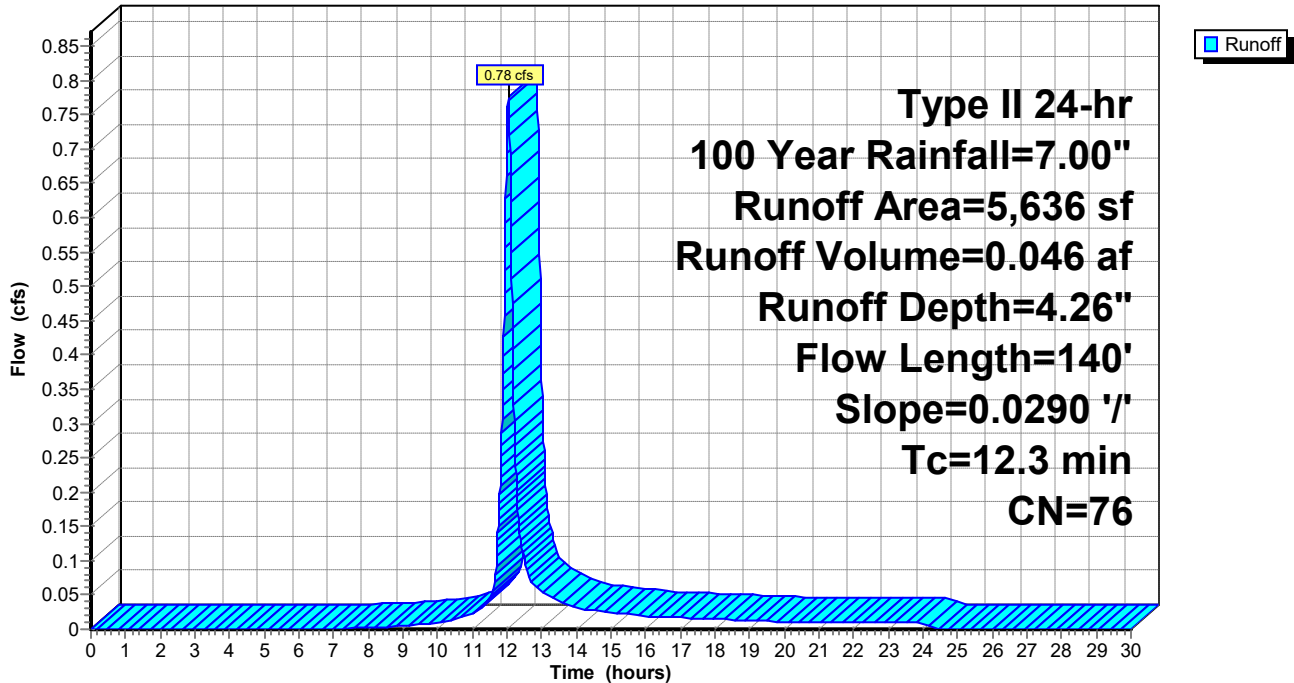

Summary for Reach R1: Reach 1


[40] Hint: Not Described (Outflow=Inflow)

Inflow Area = 0.779 ac, 54.69% Impervious, Inflow Depth = 5.47" for 100 Year event
Inflow = 2.40 cfs @ 12.04 hrs, Volume= 0.355 af
Outflow = 2.40 cfs @ 12.04 hrs, Volume= 0.355 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs

Reach R1: Reach 1

Hydrograph

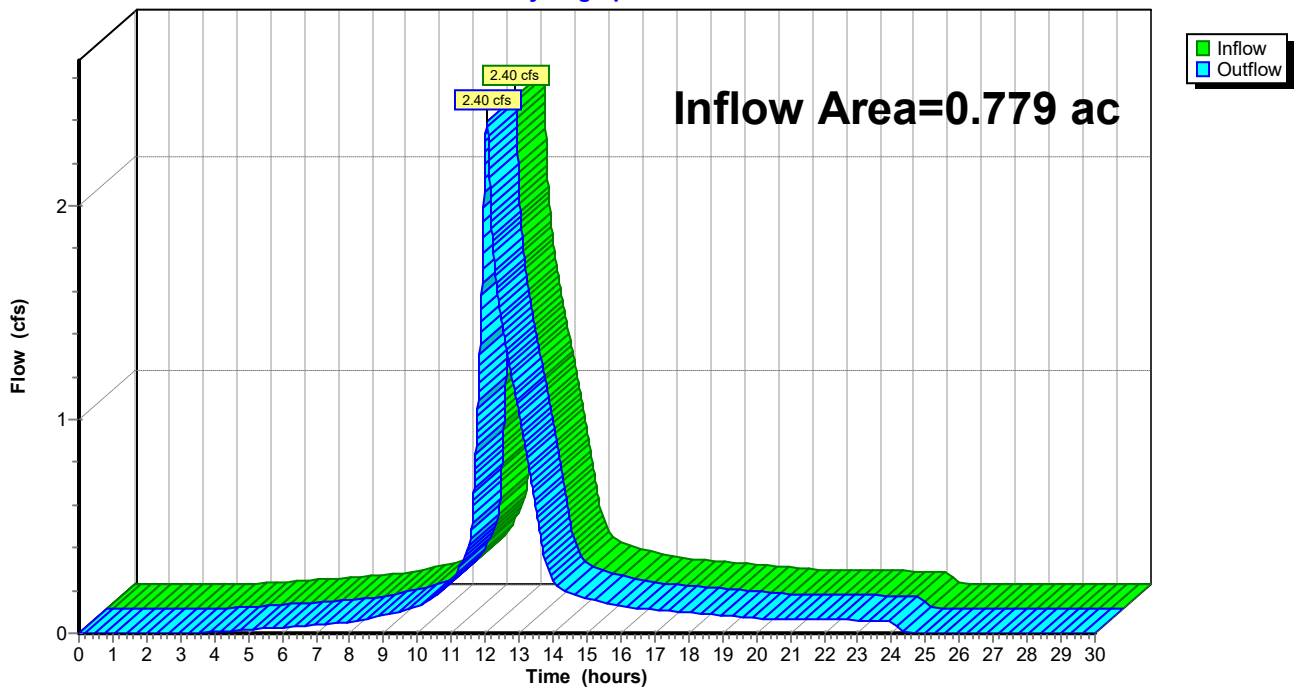

Summary for Pond P1: Pipe Storage 1

Inflow Area = 0.649 ac, 64.07% Impervious, Inflow Depth = 5.71" for 100 Year event
 Inflow = 6.63 cfs @ 11.94 hrs, Volume= 0.309 af
 Outflow = 1.62 cfs @ 12.04 hrs, Volume= 0.309 af, Atten= 76%, Lag= 6.5 min
 Primary = 1.62 cfs @ 12.04 hrs, Volume= 0.309 af

Routing by Stor-Ind method, Time Span= 0.00-30.00 hrs, dt= 0.01 hrs
 Peak Elev= 181.18' @ 12.04 hrs Surf.Area= 0.030 ac Storage= 0.095 af

Plug-Flow detention time= 20.8 min calculated for 0.309 af (100% of inflow)
 Center-of-Mass det. time= 20.8 min (798.1 - 777.3)


Volume	Invert	Avail.Storage	Storage Description
#1	178.00'	0.104 af	48.0" D x 120.0'L Pipe Storage S= 0.0010 ' /' x 3
#2	178.00'	0.009 af	48.0" D x 16.0'L Pipe Storage x 2
		0.113 af	Total Available Storage

Device	Routing	Invert	Outlet Devices
#1	Primary	178.00'	6.0" Vert. Orifice/Grate C= 0.600

Primary OutFlow Max=1.62 cfs @ 12.04 hrs HW=181.18' (Free Discharge)
 ↳ **Orifice/Grate** (Orifice Controls 1.62 cfs @ 8.24 fps)

Pond P1: Pipe Storage 1

Hydrograph

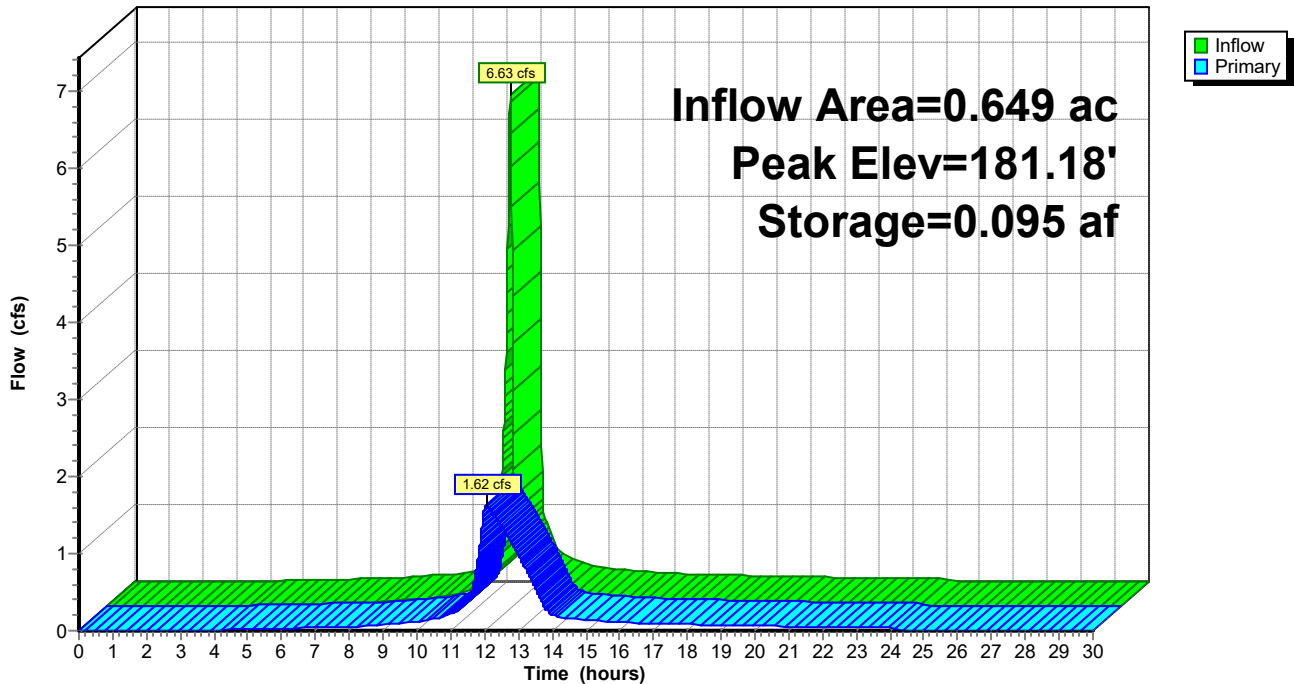

APPENDIX #7

WQV CALCULATION

COMPUTATION OF WATER QUALITY VOLUME (WQ_v)

Paved Area (Acres)	0.44
I (Impervious Cover)	56.4%
$R_v = 0.05 + 0.009I$	0.56
	1.2
A (site area in acres)	0.78
$WQ_v = [(P)(R_v)(A)]/12$ (in acre-feet)	0.043
WQ _v (in cubic-feet)	1,863

APPENDIX #8

SPILL RESPONSE PLAN

SPILL RESPONSE PLAN
25 DELAWARE AVENUE APARTMENTS

In addition to the good housekeeping and material management practices discussed in relevant sections of this plan, the following practices will be implemented for spill prevention and cleanup:

Manufacturer's recommended methods for spill cleanup will be clearly posted and site personnel will be made aware of the procedures and the location of the information and cleanup supplies. Any spill in excess or suspected to be in excess of two gallons will be reported to the NYSDEC Spill Response Unit. Notification to NYSDEC (1-800-457- 7362) must be completed within two hours of the discovery of the spill.

Materials and equipment necessary for spill cleanup will be kept in the material storage area onsite. Equipment and materials will include but not be limited to: absorbent pads, brooms, dust pans, mops, rags, gloves, goggles, kitty litter, sand, sawdust, and plastic and metal trash containers specifically for this purpose.

All spills will be cleaned up immediately after discovery.

The spill area will be kept well ventilated and personnel will wear appropriate protective clothing to prevent injury from contact with spilled substance.

Spills of toxic or hazardous material will be reported to the appropriate State or local government agency, regardless of the size.

The spill prevention plan will be adjusted to include measures to prevent this type of spill from reoccurring, and how to clean up the spill if there is another one. A description of the spill, what caused it, and the cleanup measures will also be included.

The contractor/trained individual will be the spill prevention and cleanup coordinator. He will designate at least three other site personnel who will receive spill prevention and cleanup training. These individuals will each become responsible for a particular phase of prevention and cleanup.

The names of responsible spill personnel will be posted in the material storage area on the onsite construction office or trailer.

A Spill Response Report notification are provided below.

SPILL RESPONSE REPORT
25 DELAWARE AVENUE APARTMENTS

Within 1 hour of a spill discovery less than 2 gallons in volume the following must be notified:

25 Delaware, LLC TBD

City of Albany, Randy Milano, P.E., City Engineer, 518-427-7481

City of Albany, Neil O'Connor, P.E., 518-434-5300

Within 1 hour of a spill discovery greater than 2 gallons in volume the following must be notified:

NYSDEC Spill Response Hotline 800-457-7362

25 Delaware, LLC TBD

City of Albany, Randy Milano, P.E., City Engineer, 518-427-7481

City of Albany, Neil O'Connor, P.E., 518-434-5300

Spill Response Contractor, *To Be Designated*

APPENDIX #9

DATA ON HYDRODYNAMIC SEPARATOR

First Defense[®] High Capacity

A Simple Solution for your Trickiest Sites

Product Profile

The First Defense[®] High Capacity is an enhanced vortex separator that combines an effective stormwater treatment chamber with an integral peak flow bypass. It efficiently removes sediment total suspended solids (TSS), trash and hydrocarbons from stormwater runoff without washing out previously captured pollutants. The First Defense[®] High Capacity is available in several model configurations to accommodate a wide range of pipe sizes, peak flows and depth constraints (**Table 1**, next page).

Applications

- Stormwater treatment at the point of entry into the drainage line
- Sites constrained by space, topography or drainage profiles with limited slope and depth of cover
- Retrofit installations where stormwater treatment is placed on or tied into an existing storm drain line
- Pretreatment for filters, infiltration and storage

Advantages

- Inlet options include surface grate or multiple inlet pipes
- Integral high capacity bypass conveys large peak flows without the need for “offline” arrangements using separate junction manholes
- Proven to prevent pollutant washout at up to 450% of its treatment flow
- Long flow path through the device ensures a long residence time within the treatment chamber, enhancing pollutant settling
- Delivered to site pre-assembled and ready for installation

How it Works

The First Defense[®] High Capacity has internal components designed to remove and retain gross debris, total suspended solids (TSS) and hydrocarbons (**Fig.1**).


Contaminated stormwater runoff enters the inlet chute from a surface grate and/or inlet pipe. The inlet chute introduces flow into the chamber tangentially to create a low energy vortex flow regime (**magenta arrow**) that directs sediment into the sump while oils, floating trash and debris rise to the surface.

Treated stormwater exits through a submerged outlet chute located opposite to the direction of the rotating flow (**blue arrow**). Enhanced vortex separation is provided by forcing the rotating flow within the vessel to follow the longest path possible rather than directly from inlet to outlet.

Higher flows bypass the treatment chamber to prevent turbulence and washout of captured pollutants. An internal bypass conveys infrequent peak flows directly to the outlet eliminating the need for, and expense of, external bypass control structures. A floatables draw off slot functions to convey floatables into the treatment chamber prior to bypass.

Verified by NJCAT and NJDEP

Fig.1 The First Defense[®] High Capacity has internal components designed to efficiently capture pollutants and prevent washout at peak flows.

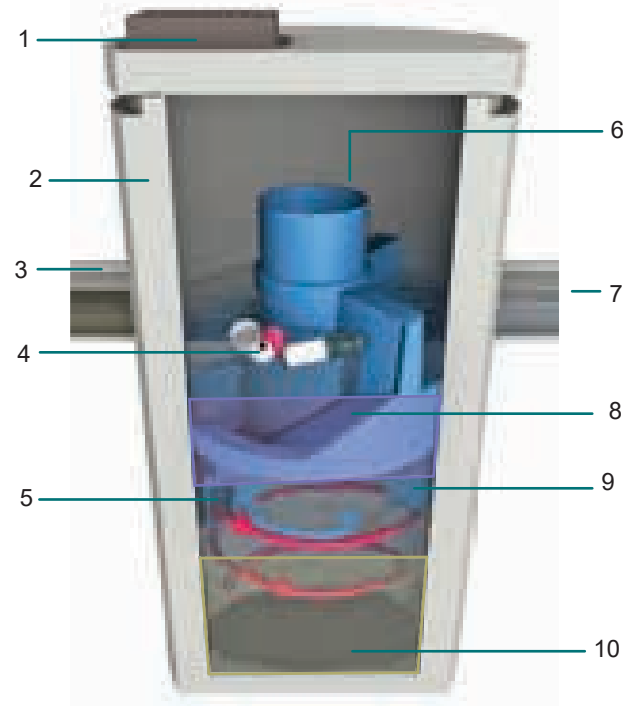

Components

- | | |
|-----------------------------------------------|-------------------------------|
| 1. Inlet Grate (optional) | 6. Internal Bypass |
| 2. Precast chamber | 7. Outlet pipe |
| 3. Inlet Pipe (optional) | 8. Oil and Floatables Storage |
| 4. Floatables Draw Off Slot
(not pictured) | 9. Outlet chute |
| 5. Inlet Chute | 10. Sediment Storage Sump |

First Defense® High Capacity

Sizing & Design

This adaptable online treatment system works easily with large pipes, multiple inlet pipes, inlet grates and now, contains a high capacity bypass for the conveyance of large peak flows. Designed with site flexibility in mind, the First Defense® High Capacity allows engineers to maximize available site space without compromising treatment level.



Fig 2. Works with multiple inlet pipes and grates

Inspection and Maintenance

Nobody maintains our systems better than we do. To ensure optimal, ongoing device performance, be sure to recommend Hydro International as a preferred service and maintenance provider to your clients.

Call **1 (800) 848-2706** to schedule an inspection and cleanout or learn more at hydro-int.com/service

Sizing Calculator for Engineers



This simple online tool will recommend the best separator, model size and online/offline arrangement based on site-specific data entered by the user.

Go to hydro-int.com/sizing to access the tool.



Fig 3. Maintenance is done with a vector truck

Table 1. First Defense® High Capacity Design Criteria.

First Defense® High Capacity Model Number	Diameter	Typical TSS Treatment Flow Rates		Peak Online Flow Rate	Maximum Pipe Diameter ¹	Oil Storage Capacity	Typical Sediment Storage Capacity ²	Minimum Distance from Outlet Invert to Top of Rim ³	Standard Distance from Outlet Invert to Sump Floor
		NJDEP Certified	110µm						
	(ft / m)	(cfs / L/s)	(cfs / L/s)	(cfs / L/s)	(in / mm)	(gal / L)	(yd ³ / m ³)	(ft / m)	(ft / m)
FD-3HC	3 / 0.9	0.84 / 23.7	1.06 / 45.3	15 / 424	18 / 457	125 / 473	0.4 / 0.3	2.0 - 3.5 / 0.6 - 1.0	3.71 / 1.13
FD-4HC	4 / 1.2	1.50 / 42.4	1.88 / 50.9	18 / 510	24 / 600	191 / 723	0.7 / 0.5	2.3 - 3.9 / 0.7 - 1.2	4.97 / 1.5
FD-5HC	5 / 1.5	2.34 / 66.2	2.94 / 82.1	20 / 566	24 / 600	300 / 1135	1.1 / .84	2.5 - 4.5 / 0.7 - 1.3	5.19 / 1.5
FD-6HC	6 / 1.8	3.38 / 95.7	4.23 / 133.9	32 / 906	30 / 750	496 / 1,878	1.6 / 1.2	3.0 - 5.1 / 0.9 - 1.6	5.97 / 1.8
FD-8HC	8 / 2.4	6.00 / 169.9	7.52 / 212.9	50 / 1,415	48 / 1219	1120 / 4239	2.8 / 2.1	3.0 - 6.0 / 0.9 - 1.8	7.40 / 2.2

¹Contact Hydro International when larger pipe sizes are required.

²Contact Hydro International when custom sediment storage capacity is required.

³Minimum distance for models depends on pipe diameter.

ATTACHMENT NO. 1

SPDES PERMIT GP#0-20-001



Department of
Environmental
Conservation

NEW YORK STATE
DEPARTMENT OF ENVIRONMENTAL CONSERVATION

SPDES GENERAL PERMIT
FOR STORMWATER DISCHARGES

From

CONSTRUCTION ACTIVITY

Permit No. GP- 0-20-001


Issued Pursuant to Article 17, Titles 7, 8 and Article 70
of the Environmental Conservation Law

Effective Date: January 29, 2020

Expiration Date: January 28, 2025

John J. Ferguson

Chief Permit Administrator

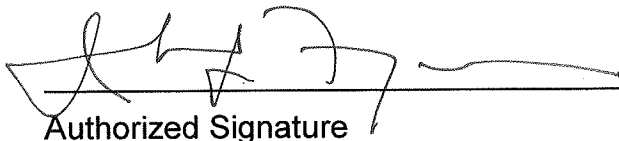

Authorized Signature

1-23-20

Date

Address: NYS DEC
Division of Environmental Permits
625 Broadway, 4th Floor
Albany, N.Y. 12233-1750

PREFACE

Pursuant to Section 402 of the Clean Water Act (“CWA”), stormwater *discharges* from certain *construction activities* are unlawful unless they are authorized by a *National Pollutant Discharge Elimination System (“NPDES”)* permit or by a state permit program. New York administers the approved State Pollutant Discharge Elimination System (SPDES) program with permits issued in accordance with the New York State Environmental Conservation Law (ECL) Article 17, Titles 7, 8 and Article 70.

An *owner or operator* of a *construction activity* that is eligible for coverage under this permit must obtain coverage prior to the *commencement of construction activity*. Activities that fit the definition of “*construction activity*”, as defined under 40 CFR 122.26(b)(14)(x), (15)(i), and (15)(ii), constitute construction of a *point source* and therefore, pursuant to ECL section 17-0505 and 17-0701, the *owner or operator* must have coverage under a SPDES permit prior to *commencing construction activity*. The *owner or operator* cannot wait until there is an actual *discharge* from the *construction site* to obtain permit coverage.

***Note: The italicized words/phrases within this permit are defined in Appendix A.**

**NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL CONSERVATION
SPDES GENERAL PERMIT FOR STORMWATER DISCHARGES FROM
CONSTRUCTION ACTIVITIES**

Table of Contents

Part 1. PERMIT COVERAGE AND LIMITATIONS	1
A. Permit Application	1
B. Effluent Limitations Applicable to Discharges from Construction Activities	1
C. Post-construction Stormwater Management Practice Requirements	4
D. Maintaining Water Quality	8
E. Eligibility Under This General Permit.....	9
F. Activities Which Are Ineligible for Coverage Under This General Permit	9
Part II. PERMIT COVERAGE	12
A. How to Obtain Coverage	12
B. Notice of Intent (NOI) Submittal	13
C. Permit Authorization	13
D. General Requirements For Owners or Operators With Permit Coverage	15
E. Permit Coverage for Discharges Authorized Under GP-0-15-002.....	17
F. Change of Owner or Operator	17
Part III. STORMWATER POLLUTION PREVENTION PLAN (SWPPP).....	18
A. General SWPPP Requirements	18
B. Required SWPPP Contents	20
C. Required SWPPP Components by Project Type.....	24
Part IV. INSPECTION AND MAINTENANCE REQUIREMENTS	24
A. General Construction Site Inspection and Maintenance Requirements	24
B. Contractor Maintenance Inspection Requirements	24
C. Qualified Inspector Inspection Requirements	25
Part V. TERMINATION OF PERMIT COVERAGE	29
A. Termination of Permit Coverage	29
Part VI. REPORTING AND RETENTION RECORDS	31
A. Record Retention	31
B. Addresses	31
Part VII. STANDARD PERMIT CONDITIONS.....	31
A. Duty to Comply.....	31
B. Continuation of the Expired General Permit.....	32
C. Enforcement.....	32
D. Need to Halt or Reduce Activity Not a Defense.....	32
E. Duty to Mitigate	33
F. Duty to Provide Information.....	33
G. Other Information	33
H. Signatory Requirements.....	33
I. Property Rights	35
J. Severability.....	35

K.	Requirement to Obtain Coverage Under an Alternative Permit.....	35
L.	Proper Operation and Maintenance	36
M.	Inspection and Entry	36
N.	Permit Actions	37
O.	Definitions	37
P.	Re-Opener Clause	37
Q.	Penalties for Falsification of Forms and Reports.....	37
R.	Other Permits	38
APPENDIX A – Acronyms and Definitions		39
Acronyms.....		39
Definitions.....		40
APPENDIX B – Required SWPPP Components by Project Type		48
Table 1.....		48
Table 2.....		50
APPENDIX C – Watersheds Requiring Enhanced Phosphorus Removal.....		52
APPENDIX D – Watersheds with Lower Disturbance Threshold		58
APPENDIX E – 303(d) Segments Impaired by Construction Related Pollutant(s)		59
APPENDIX F – List of NYS DEC Regional Offices		65

Part 1. PERMIT COVERAGE AND LIMITATIONS

A. Permit Application

This permit authorizes stormwater *discharges to surface waters of the State* from the following *construction activities* identified within 40 CFR Parts 122.26(b)(14)(x), 122.26(b)(15)(i) and 122.26(b)(15)(ii), provided all of the eligibility provisions of this permit are met:

1. *Construction activities* involving soil disturbances of one (1) or more acres; including disturbances of less than one acre that are part of a *larger common plan of development or sale* that will ultimately disturb one or more acres of land; excluding *routine maintenance activity* that is performed to maintain the original line and grade, hydraulic capacity or original purpose of a facility;
2. *Construction activities* involving soil disturbances of less than one (1) acre where the Department has determined that a *SPDES* permit is required for stormwater *discharges* based on the potential for contribution to a violation of a *water quality standard* or for significant contribution of *pollutants to surface waters of the State*.
3. *Construction activities* located in the watershed(s) identified in Appendix D that involve soil disturbances between five thousand (5,000) square feet and one (1) acre of land.

B. Effluent Limitations Applicable to Discharges from Construction Activities

Discharges authorized by this permit must achieve, at a minimum, the effluent limitations in Part I.B.1. (a) – (f) of this permit. These limitations represent the degree of effluent reduction attainable by the application of best practicable technology currently available.

1. Erosion and Sediment Control Requirements - The *owner or operator* must select, design, install, implement and maintain control measures to *minimize the discharge of pollutants* and prevent a violation of the *water quality standards*. The selection, design, installation, implementation, and maintenance of these control measures must meet the non-numeric effluent limitations in Part I.B.1.(a) – (f) of this permit and be in accordance with the New York State Standards and Specifications for Erosion and Sediment Control, dated November 2016, using sound engineering judgment. Where control measures are not designed in conformance with the design criteria included in the technical standard, the *owner or operator* must include in the *Stormwater Pollution Prevention Plan* (“SWPPP”) the reason(s) for the

deviation or alternative design and provide information which demonstrates that the deviation or alternative design is *equivalent* to the technical standard.

- a. **Erosion and Sediment Controls.** Design, install and maintain effective erosion and sediment controls to *minimize* the *discharge of pollutants* and prevent a violation of the *water quality standards*. At a minimum, such controls must be designed, installed and maintained to:
- (i) *Minimize* soil erosion through application of runoff control and soil stabilization control measure to *minimize pollutant discharges*;
 - (ii) Control stormwater *discharges*, including both peak flowrates and total stormwater volume, to *minimize* channel and *streambank* erosion and scour in the immediate vicinity of the *discharge* points;
 - (iii) *Minimize* the amount of soil exposed during *construction activity*;
 - (iv) *Minimize* the disturbance of *steep slopes*;
 - (v) *Minimize* sediment *discharges* from the site;
 - (vi) Provide and maintain *natural buffers* around surface waters, direct stormwater to vegetated areas and maximize stormwater infiltration to reduce *pollutant discharges*, unless *infeasible*;
 - (vii) *Minimize* soil compaction. Minimizing soil compaction is not required where the intended function of a specific area of the site dictates that it be compacted;
 - (viii) Unless *infeasible*, preserve a sufficient amount of topsoil to complete soil restoration and establish a uniform, dense vegetative cover; and
 - (ix) *Minimize* dust. On areas of exposed soil, *minimize* dust through the appropriate application of water or other dust suppression techniques to control the generation of pollutants that could be discharged from the site.
- b. **Soil Stabilization.** In areas where soil disturbance activity has temporarily or permanently ceased, the application of soil stabilization measures must be initiated by the end of the next business day and completed within fourteen (14) days from the date the current soil disturbance activity ceased. For construction sites that *directly discharge* to one of the 303(d) segments

listed in Appendix E or is located in one of the watersheds listed in Appendix C, the application of soil stabilization measures must be initiated by the end of the next business day and completed within seven (7) days from the date the current soil disturbance activity ceased. See Appendix A for definition of *Temporarily Ceased*.

- c. **Dewatering.** *Discharges* from *dewatering* activities, including *discharges* from *dewatering* of trenches and excavations, must be managed by appropriate control measures.

- d. **Pollution Prevention Measures.** Design, install, implement, and maintain effective pollution prevention measures to *minimize* the *discharge* of *pollutants* and prevent a violation of the *water quality standards*. At a minimum, such measures must be designed, installed, implemented and maintained to:
 - (i) *Minimize* the *discharge* of *pollutants* from equipment and vehicle washing, wheel wash water, and other wash waters. This applies to washing operations that use clean water only. Soaps, detergents and solvents cannot be used;

 - (ii) *Minimize* the exposure of building materials, building products, construction wastes, trash, landscape materials, fertilizers, pesticides, herbicides, detergents, sanitary waste, hazardous and toxic waste, and other materials present on the site to precipitation and to stormwater. Minimization of exposure is not required in cases where the exposure to precipitation and to stormwater will not result in a *discharge* of *pollutants*, or where exposure of a specific material or product poses little risk of stormwater contamination (such as final products and materials intended for outdoor use) ; and

 - (iii) Prevent the *discharge* of *pollutants* from spills and leaks and implement chemical spill and leak prevention and response procedures.

- e. **Prohibited Discharges.** The following *discharges* are prohibited:
 - (i) Wastewater from washout of concrete;

 - (ii) Wastewater from washout and cleanout of stucco, paint, form release oils, curing compounds and other construction materials;

- (iii) Fuels, oils, or other *pollutants* used in vehicle and equipment operation and maintenance;
 - (iv) Soaps or solvents used in vehicle and equipment washing; and
 - (v) Toxic or hazardous substances from a spill or other release.
- f. Surface Outlets. When discharging from basins and impoundments, the outlets shall be designed, constructed and maintained in such a manner that sediment does not leave the basin or impoundment and that erosion at or below the outlet does not occur.

C. Post-construction Stormwater Management Practice Requirements

1. The *owner or operator* of a *construction activity* that requires post-construction stormwater management practices pursuant to Part III.C. of this permit must select, design, install, and maintain the practices to meet the *performance criteria* in the New York State Stormwater Management Design Manual (“Design Manual”), dated January 2015, using sound engineering judgment. Where post-construction stormwater management practices (“SMPs”) are not designed in conformance with the *performance criteria* in the Design Manual, the *owner or operator* must include in the SWPPP the reason(s) for the deviation or alternative design and provide information which demonstrates that the deviation or alternative design is *equivalent* to the technical standard.
2. The *owner or operator* of a *construction activity* that requires post-construction stormwater management practices pursuant to Part III.C. of this permit must design the practices to meet the applicable *sizing criteria* in Part I.C.2.a., b., c. or d. of this permit.

a. Sizing Criteria for New Development

- (i) Runoff Reduction Volume (“RRv”): Reduce the total Water Quality Volume (“WQv”) by application of RR techniques and standard SMPs with RRv capacity. The total WQv shall be calculated in accordance with the criteria in Section 4.2 of the Design Manual.
- (ii) Minimum RRv and Treatment of Remaining Total WQv: Construction activities that cannot meet the criteria in Part I.C.2.a.(i) of this permit due to site limitations shall direct runoff from all newly constructed impervious areas to a RR technique or standard SMP with RRv capacity unless infeasible. The specific site limitations that prevent the reduction of 100% of the WQv shall be documented in the SWPPP.

For each impervious area that is not directed to a RR technique or standard SMP with RRv capacity, the SWPPP must include documentation which demonstrates that all options were considered and for each option explains why it is considered infeasible.

In no case shall the runoff reduction achieved from the newly constructed impervious areas be less than the Minimum RRv as calculated using the criteria in Section 4.3 of the Design Manual.

The remaining portion of the total WQv that cannot be reduced shall be treated by application of standard SMPs.

- (iii) Channel Protection Volume (“Cpv”): Provide 24 hour extended detention of the post-developed 1-year, 24-hour storm event; remaining after runoff reduction. The Cpv requirement does not apply when:
 - (1) Reduction of the entire Cpv is achieved by application of runoff reduction techniques or infiltration systems, or
 - (2) The site discharges directly to tidal waters, or fifth order or larger streams.

- (iv) *Overbank* Flood Control Criteria (“Qp”): Requires storage to attenuate the post-development 10-year, 24-hour peak discharge rate (Qp) to predevelopment rates. The Qp requirement does not apply when:
 - (1) the site discharges directly to tidal waters or fifth order or larger streams, or
 - (2) A downstream analysis reveals that *overbank* control is not required.

- (v) Extreme Flood Control Criteria (“Qf”): Requires storage to attenuate the post-development 100-year, 24-hour peak discharge rate (Qf) to predevelopment rates. The Qf requirement does not apply when:
 - (1) the site discharges directly to tidal waters or fifth order or larger streams, or
 - (2) A downstream analysis reveals that *overbank* control is not required.

b. Sizing Criteria for New Development in Enhanced Phosphorus Removal Watershed

- (i) Runoff Reduction Volume (RRv): Reduce the total Water Quality Volume (WQv) by application of RR techniques and standard SMPs with RRv capacity. The total WQv is the runoff volume from the 1-year, 24 hour design storm over the post-developed watershed and shall be

calculated in accordance with the criteria in Section 10.3 of the Design Manual.

- (ii) Minimum RRv and Treatment of Remaining Total WQv: *Construction activities* that cannot meet the criteria in Part I.C.2.b.(i) of this permit due to *site limitations* shall direct runoff from all newly constructed *impervious areas* to a RR technique or standard SMP with RRv capacity unless *infeasible*. The specific *site limitations* that prevent the reduction of 100% of the WQv shall be documented in the SWPPP. For each *impervious area* that is not directed to a RR technique or standard SMP with RRv capacity, the SWPPP must include documentation which demonstrates that all options were considered and for each option explains why it is considered *infeasible*.

In no case shall the runoff reduction achieved from the newly constructed *impervious areas* be less than the Minimum RRv as calculated using the criteria in Section 10.3 of the Design Manual. The remaining portion of the total WQv that cannot be reduced shall be treated by application of standard SMPs.

- (iii) Channel Protection Volume (Cpv): Provide 24 hour extended detention of the post-developed 1-year, 24-hour storm event; remaining after runoff reduction. The Cpv requirement does not apply when:
 - (1) Reduction of the entire Cpv is achieved by application of runoff reduction techniques or infiltration systems, or
 - (2) The site *discharges* directly to tidal waters, or fifth order or larger streams.
- (iv) *Overbank* Flood Control Criteria (Qp): Requires storage to attenuate the post-development 10-year, 24-hour peak *discharge* rate (Qp) to predevelopment rates. The Qp requirement does not apply when:
 - (1) the site *discharges* directly to tidal waters or fifth order or larger streams, or
 - (2) A downstream analysis reveals that *overbank* control is not required.
- (v) Extreme Flood Control Criteria (Qf): Requires storage to attenuate the post-development 100-year, 24-hour peak *discharge* rate (Qf) to predevelopment rates. The Qf requirement does not apply when:
 - (1) the site *discharges* directly to tidal waters or fifth order or larger streams, or
 - (2) A downstream analysis reveals that *overbank* control is not required.

c. Sizing Criteria for Redevelopment Activity

- (i) Water Quality Volume (WQv): The WQv treatment objective for *redevelopment activity* shall be addressed by one of the following options. *Redevelopment activities* located in an Enhanced Phosphorus Removal Watershed (see Part III.B.3. and Appendix C of this permit) shall calculate the WQv in accordance with Section 10.3 of the Design Manual. All other *redevelopment activities* shall calculate the WQv in accordance with Section 4.2 of the Design Manual.
- (1) Reduce the existing *impervious cover* by a minimum of 25% of the total disturbed, *impervious area*. The Soil Restoration criteria in Section 5.1.6 of the Design Manual must be applied to all newly created pervious areas, or
 - (2) Capture and treat a minimum of 25% of the WQv from the disturbed, *impervious area* by the application of standard SMPs; or reduce 25% of the WQv from the disturbed, *impervious area* by the application of RR techniques or standard SMPs with RRv capacity., or
 - (3) Capture and treat a minimum of 75% of the WQv from the disturbed, *impervious area* as well as any additional runoff from tributary areas by application of the alternative practices discussed in Sections 9.3 and 9.4 of the Design Manual., or
 - (4) Application of a combination of 1, 2 and 3 above that provide a weighted average of at least two of the above methods. Application of this method shall be in accordance with the criteria in Section 9.2.1(B) (IV) of the Design Manual.

If there is an existing post-construction stormwater management practice located on the site that captures and treats runoff from the *impervious area* that is being disturbed, the WQv treatment option selected must, at a minimum, provide treatment equal to the treatment that was being provided by the existing practice(s) if that treatment is greater than the treatment required by options 1 – 4 above.

- (ii) Channel Protection Volume (Cpv): Not required if there are no changes to hydrology that increase the *discharge* rate from the project site.
- (iii) *Overbank* Flood Control Criteria (Qp): Not required if there are no changes to hydrology that increase the *discharge* rate from the project site.
- (iv) Extreme Flood Control Criteria (Qf): Not required if there are no changes to hydrology that increase the *discharge* rate from the project site

d. Sizing Criteria for Combination of Redevelopment Activity and New Development

Construction projects that include both New Development and Redevelopment Activity shall provide post-construction stormwater management controls that meet the sizing criteria calculated as an aggregate of the Sizing Criteria in Part I.C.2.a. or b. of this permit for the New Development portion of the project and Part I.C.2.c of this permit for Redevelopment Activity portion of the project.

D. Maintaining Water Quality

The Department expects that compliance with the conditions of this permit will control *discharges* necessary to meet applicable *water quality standards*. It shall be a violation of the *ECL* for any discharge to either cause or contribute to a violation of *water quality standards* as contained in Parts 700 through 705 of Title 6 of the Official Compilation of Codes, Rules and Regulations of the State of New York, such as:

1. There shall be no increase in turbidity that will cause a substantial visible contrast to natural conditions;
2. There shall be no increase in suspended, colloidal or settleable solids that will cause deposition or impair the waters for their best usages; and
3. There shall be no residue from oil and floating substances, nor visible oil film, nor globules of grease.

If there is evidence indicating that the stormwater *discharges* authorized by this permit are causing, have the reasonable potential to cause, or are contributing to a violation of the *water quality standards*; the *owner or operator* must take appropriate corrective action in accordance with Part IV.C.5. of this general permit and document in accordance with Part IV.C.4. of this general permit. To address the *water quality standard* violation the *owner or operator* may need to provide additional information, include and implement appropriate controls in the SWPPP to correct the problem, or obtain an individual SPDES permit.

If there is evidence indicating that despite compliance with the terms and conditions of this general permit it is demonstrated that the stormwater *discharges* authorized by this permit are causing or contributing to a violation of *water quality standards*, or if the Department determines that a modification of the permit is necessary to prevent a violation of *water quality standards*, the authorized *discharges* will no longer be eligible for coverage under this permit. The Department may require the *owner or operator* to obtain an individual SPDES permit to continue discharging.

E. Eligibility Under This General Permit

1. This permit may authorize all *discharges* of stormwater from *construction activity* to *surface waters of the State* and *groundwaters* except for ineligible *discharges* identified under subparagraph F. of this Part.
2. Except for non-stormwater *discharges* explicitly listed in the next paragraph, this permit only authorizes stormwater *discharges*; including stormwater runoff, snowmelt runoff, and surface runoff and drainage, from *construction activities*.
3. Notwithstanding paragraphs E.1 and E.2 above, the following non-stormwater discharges are authorized by this permit: those listed in 6 NYCRR 750-1.2(a)(29)(vi), with the following exception: “Discharges from firefighting activities are authorized only when the firefighting activities are emergencies/unplanned”; waters to which other components have not been added that are used to control dust in accordance with the SWPPP; and uncontaminated *discharges* from *construction site* de-watering operations. All non-stormwater discharges must be identified in the SWPPP. Under all circumstances, the *owner or operator* must still comply with *water quality standards* in Part I.D of this permit.
4. The *owner or operator* must maintain permit eligibility to *discharge* under this permit. Any *discharges* that are not compliant with the eligibility conditions of this permit are not authorized by the permit and the *owner or operator* must either apply for a separate permit to cover those ineligible *discharges* or take steps necessary to make the *discharge* eligible for coverage.

F. Activities Which Are Ineligible for Coverage Under This General Permit

All of the following are **not** authorized by this permit:

1. *Discharges* after *construction activities* have been completed and the site has undergone *final stabilization*;
2. *Discharges* that are mixed with sources of non-stormwater other than those expressly authorized under subsection E.3. of this Part and identified in the SWPPP required by this permit;
3. *Discharges* that are required to obtain an individual SPDES permit or another SPDES general permit pursuant to Part VII.K. of this permit;
4. *Construction activities* or *discharges* from *construction activities* that may adversely affect an *endangered or threatened species* unless the *owner or*

operator has obtained a permit issued pursuant to 6 NYCRR Part 182 for the project or the Department has issued a letter of non-jurisdiction for the project. All documentation necessary to demonstrate eligibility shall be maintained on site in accordance with Part II.D.2 of this permit;

5. *Discharges* which either cause or contribute to a violation of *water quality standards* adopted pursuant to the *ECL* and its accompanying regulations;
6. *Construction activities* for residential, commercial and institutional projects:
 - a. Where the *discharges* from the *construction activities* are tributary to waters of the state classified as AA or AA-s; and
 - b. Which are undertaken on land with no existing *impervious cover*; and
 - c. Which disturb one (1) or more acres of land designated on the current United States Department of Agriculture (“USDA”) Soil Survey as Soil Slope Phase “D”, (provided the map unit name is inclusive of slopes greater than 25%), or Soil Slope Phase “E” or “F” (regardless of the map unit name), or a combination of the three designations.
7. *Construction activities* for linear transportation projects and linear utility projects:
 - a. Where the *discharges* from the *construction activities* are tributary to waters of the state classified as AA or AA-s; and
 - b. Which are undertaken on land with no existing *impervious cover*; and
 - c. Which disturb two (2) or more acres of land designated on the current USDA Soil Survey as Soil Slope Phase “D” (provided the map unit name is inclusive of slopes greater than 25%), or Soil Slope Phase “E” or “F” (regardless of the map unit name), or a combination of the three designations.

8. *Construction activities* that have the potential to affect an *historic property*, unless there is documentation that such impacts have been resolved. The following documentation necessary to demonstrate eligibility with this requirement shall be maintained on site in accordance with Part II.D.2 of this permit and made available to the Department in accordance with Part VII.F of this permit:
- a. Documentation that the *construction activity* is not within an archeologically sensitive area indicated on the sensitivity map, and that the *construction activity* is not located on or immediately adjacent to a property listed or determined to be eligible for listing on the National or State Registers of Historic Places, and that there is no new permanent building on the *construction site* within the following distances from a building, structure, or object that is more than 50 years old, or if there is such a new permanent building on the *construction site* within those parameters that NYS Office of Parks, Recreation and Historic Preservation (OPRHP), a Historic Preservation Commission of a Certified Local Government, or a qualified preservation professional has determined that the building, structure, or object more than 50 years old is not historically/archeologically significant.
 - 1-5 acres of disturbance - 20 feet
 - 5-20 acres of disturbance - 50 feet
 - 20+ acres of disturbance - 100 feet, or
 - b. DEC consultation form sent to OPRHP, and copied to the NYS DEC Agency Historic Preservation Officer (APO), and
 - (i) the State Environmental Quality Review (SEQR) Environmental Assessment Form (EAF) with a negative declaration or the Findings Statement, with documentation of OPRHP's agreement with the resolution; or
 - (ii) documentation from OPRHP that the *construction activity* will result in No Impact; or
 - (iii) documentation from OPRHP providing a determination of No Adverse Impact; or
 - (iv) a Letter of Resolution signed by the owner/operator, OPRHP and the DEC APO which allows for this *construction activity* to be eligible for coverage under the general permit in terms of the State Historic Preservation Act (SHPA); or
 - c. Documentation of satisfactory compliance with Section 106 of the National Historic Preservation Act for a coterminous project area:

- (i) No Affect
- (ii) No Adverse Affect
- (iii) Executed Memorandum of Agreement, or

d. Documentation that:

- (i) SHPA Section 14.09 has been completed by NYS DEC or another state agency.
9. *Discharges from construction activities* that are subject to an existing SPDES individual or general permit where a SPDES permit for *construction activity* has been terminated or denied; or where the *owner or operator* has failed to renew an expired individual permit.

Part II. PERMIT COVERAGE

A. How to Obtain Coverage

1. An *owner or operator* of a *construction activity* that is not subject to the requirements of a regulated, traditional land use control MS4 must first prepare a SWPPP in accordance with all applicable requirements of this permit and then submit a completed Notice of Intent (NOI) to the Department to be authorized to discharge under this permit.
2. An *owner or operator* of a *construction activity* that is subject to the requirements of a *regulated, traditional land use control MS4* must first prepare a SWPPP in accordance with all applicable requirements of this permit and then have the SWPPP reviewed and accepted by the *regulated, traditional land use control MS4* prior to submitting the NOI to the Department. The *owner or operator* shall have the “MS4 SWPPP Acceptance” form signed in accordance with Part VII.H., and then submit that form along with a completed NOI to the Department.
3. The requirement for an *owner or operator* to have its SWPPP reviewed and accepted by the *regulated, traditional land use control MS4* prior to submitting the NOI to the Department does not apply to an *owner or operator* that is obtaining permit coverage in accordance with the requirements in Part II.F. (Change of Owner or Operator) or where the *owner or operator* of the *construction activity* is the *regulated, traditional land use control MS4* . This exemption does not apply to *construction activities* subject to the New York City Administrative Code.

B. Notice of Intent (NOI) Submittal

1. Prior to December 21, 2020, an owner or operator shall use either the electronic (eNOI) or paper version of the NOI that the Department prepared. Both versions of the NOI are located on the Department's website (<http://www.dec.ny.gov/>). The paper version of the NOI shall be signed in accordance with Part VII.H. of this permit and submitted to the following address:

**NOTICE OF INTENT
NYS DEC, Bureau of Water Permits
625 Broadway, 4th Floor
Albany, New York 12233-3505**

2. Beginning December 21, 2020 and in accordance with EPA's 2015 NPDES Electronic Reporting Rule (40 CFR Part 127), the *owner or operator* must submit the NOI electronically using the *Department's* online NOI.
3. The *owner or operator* shall have the SWPPP preparer sign the "SWPPP Preparer Certification" statement on the NOI prior to submitting the form to the Department.
4. As of the date the NOI is submitted to the Department, the *owner or operator* shall make the NOI and SWPPP available for review and copying in accordance with the requirements in Part VII.F. of this permit.

C. Permit Authorization

1. An *owner or operator* shall not *commence construction activity* until their authorization to *discharge* under this permit goes into effect.
2. Authorization to *discharge* under this permit will be effective when the *owner or operator* has satisfied all of the following criteria:
 - a. project review pursuant to the State Environmental Quality Review Act ("SEQRA") have been satisfied, when SEQRA is applicable. See the Department's website (<http://www.dec.ny.gov/>) for more information,
 - b. where required, all necessary Department permits subject to the *Uniform Procedures Act* ("UPA") (see 6 NYCRR Part 621), or the equivalent from another New York State agency, have been obtained, unless otherwise notified by the Department pursuant to 6 NYCRR 621.3(a)(4). *Owners or operators of construction activities* that are required to obtain UPA permits

must submit a preliminary SWPPP to the appropriate DEC Permit Administrator at the Regional Office listed in Appendix F at the time all other necessary *UPA* permit applications are submitted. The preliminary SWPPP must include sufficient information to demonstrate that the *construction activity* qualifies for authorization under this permit,

- c. the final SWPPP has been prepared, and
 - d. a complete NOI has been submitted to the Department in accordance with the requirements of this permit.
3. An *owner or operator* that has satisfied the requirements of Part II.C.2 above will be authorized to *discharge* stormwater from their *construction activity* in accordance with the following schedule:
- a. For *construction activities* that are not subject to the requirements of a *regulated, traditional land use control MS4*:
 - (i) Five (5) business days from the date the Department receives a complete electronic version of the NOI (eNOI) for *construction activities* with a SWPPP that has been prepared in conformance with the design criteria in the technical standard referenced in Part III.B.1 and the *performance criteria* in the technical standard referenced in Parts III.B., 2 or 3, for *construction activities* that require post-construction stormwater management practices pursuant to Part III.C.; or
 - (ii) Sixty (60) business days from the date the Department receives a complete NOI (electronic or paper version) for *construction activities* with a SWPPP that has not been prepared in conformance with the design criteria in technical standard referenced in Part III.B.1. or, for *construction activities* that require post-construction stormwater management practices pursuant to Part III.C., the *performance criteria* in the technical standard referenced in Parts III.B., 2 or 3, or;
 - (iii) Ten (10) business days from the date the Department receives a complete paper version of the NOI for *construction activities* with a SWPPP that has been prepared in conformance with the design criteria in the technical standard referenced in Part III.B.1 and the *performance criteria* in the technical standard referenced in Parts III.B., 2 or 3, for *construction activities* that require post-construction stormwater management practices pursuant to Part III.C.

- b. For *construction activities* that are subject to the requirements of a *regulated, traditional land use control MS4*:
 - (i) Five (5) business days from the date the Department receives both a complete electronic version of the NOI (eNOI) and signed “MS4 SWPPP Acceptance” form, or
 - (ii) Ten (10) business days from the date the Department receives both a complete paper version of the NOI and signed “MS4 SWPPP Acceptance” form.
4. Coverage under this permit authorizes stormwater *discharges* from only those areas of disturbance that are identified in the NOI. If an *owner or operator* wishes to have stormwater *discharges* from future or additional areas of disturbance authorized, they must submit a new NOI that addresses that phase of the development, unless otherwise notified by the Department. The *owner or operator* shall not *commence construction activity* on the future or additional areas until their authorization to *discharge* under this permit goes into effect in accordance with Part II.C. of this permit.

D. General Requirements For Owners or Operators With Permit Coverage

1. The *owner or operator* shall ensure that the provisions of the SWPPP are implemented from the *commencement of construction activity* until all areas of disturbance have achieved *final stabilization* and the Notice of Termination (“NOT”) has been submitted to the Department in accordance with Part V. of this permit. This includes any changes made to the SWPPP pursuant to Part III.A.4. of this permit.
2. The *owner or operator* shall maintain a copy of the General Permit (GP-0-20-001), NOI, *NOI Acknowledgment Letter*, SWPPP, MS4 SWPPP Acceptance form, inspection reports, responsible contractor’s or subcontractor’s certification statement (see Part III.A.6.), and all documentation necessary to demonstrate eligibility with this permit at the *construction site* until all disturbed areas have achieved *final stabilization* and the NOT has been submitted to the Department. The documents must be maintained in a secure location, such as a job trailer, on-site construction office, or mailbox with lock. The secure location must be accessible during normal business hours to an individual performing a compliance inspection.
3. The *owner or operator of a construction activity* shall not disturb greater than five (5) acres of soil at any one time without prior written authorization from the Department or, in areas under the jurisdiction of a *regulated, traditional land*

- use control MS4, the regulated, traditional land use control MS4 (provided the regulated, traditional land use control MS4 is not the owner or operator of the construction activity). At a minimum, the owner or operator must comply with the following requirements in order to be authorized to disturb greater than five (5) acres of soil at any one time:*
- a. The *owner or operator* shall have a *qualified inspector* conduct **at least two (2)** site inspections in accordance with Part IV.C. of this permit every seven (7) calendar days, for as long as greater than five (5) acres of soil remain disturbed. The two (2) inspections shall be separated by a minimum of two (2) full calendar days.
 - b. In areas where soil disturbance activity has temporarily or permanently ceased, the application of soil stabilization measures must be initiated by the end of the next business day and completed within seven (7) days from the date the current soil disturbance activity ceased. The soil stabilization measures selected shall be in conformance with the technical standard, New York State Standards and Specifications for Erosion and Sediment Control, dated November 2016.
 - c. The *owner or operator* shall prepare a phasing plan that defines maximum disturbed area per phase and shows required cuts and fills.
 - d. The *owner or operator* shall install any additional site-specific practices needed to protect water quality.
 - e. The *owner or operator* shall include the requirements above in their SWPPP.
4. In accordance with statute, regulations, and the terms and conditions of this permit, the Department may suspend or revoke an *owner's or operator's* coverage under this permit at any time if the Department determines that the SWPPP does not meet the permit requirements or consistent with Part VII.K..
 5. Upon a finding of significant non-compliance with the practices described in the SWPPP or violation of this permit, the Department may order an immediate stop to all activity at the site until the non-compliance is remedied. The stop work order shall be in writing, describe the non-compliance in detail, and be sent to the *owner or operator*.
 6. For *construction activities* that are subject to the requirements of a *regulated, traditional land use control MS4*, the *owner or operator* shall notify the

regulated, traditional land use control MS4 in writing of any planned amendments or modifications to the post-construction stormwater management practice component of the SWPPP required by Part III.A. 4. and 5. of this permit. Unless otherwise notified by the *regulated, traditional land use control MS4*, the *owner or operator* shall have the SWPPP amendments or modifications reviewed and accepted by the *regulated, traditional land use control MS4* prior to commencing construction of the post-construction stormwater management practice.

E. Permit Coverage for Discharges Authorized Under GP-0-15-002

1. Upon renewal of SPDES General Permit for Stormwater Discharges from *Construction Activity* (Permit No. GP-0-15-002), an *owner or operator* of a *construction activity* with coverage under GP-0-15-002, as of the effective date of GP- 0-20-001, shall be authorized to *discharge* in accordance with GP- 0-20-001, unless otherwise notified by the Department.

An *owner or operator* may continue to implement the technical/design components of the post-construction stormwater management controls provided that such design was done in conformance with the technical standards in place at the time of initial project authorization. However, they must comply with the other, non-design provisions of GP-0-20-001.

F. Change of Owner or Operator

1. When property ownership changes or when there is a change in operational control over the construction plans and specifications, the original *owner or operator* must notify the new *owner or operator*, in writing, of the requirement to obtain permit coverage by submitting a NOI with the Department. For *construction activities* subject to the requirements of a *regulated, traditional land use control MS4*, the original *owner or operator* must also notify the MS4, in writing, of the change in ownership at least 30 calendar days prior to the change in ownership.
2. Once the new *owner or operator* obtains permit coverage, the original *owner or operator* shall then submit a completed NOT with the name and permit identification number of the new *owner or operator* to the Department at the address in Part II.B.1. of this permit. If the original *owner or operator* maintains ownership of a portion of the *construction activity* and will disturb soil, they must maintain their coverage under the permit.
3. Permit coverage for the new *owner or operator* will be effective as of the date the Department receives a complete NOI, provided the original *owner or*

operator was not subject to a sixty (60) business day authorization period that has not expired as of the date the Department receives the NOI from the new *owner or operator*.

Part III. STORMWATER POLLUTION PREVENTION PLAN (SWPPP)

A. General SWPPP Requirements

1. A SWPPP shall be prepared and implemented by the *owner or operator* of each *construction activity* covered by this permit. The SWPPP must document the selection, design, installation, implementation and maintenance of the control measures and practices that will be used to meet the effluent limitations in Part I.B. of this permit and where applicable, the post-construction stormwater management practice requirements in Part I.C. of this permit. The SWPPP shall be prepared prior to the submittal of the NOI. The NOI shall be submitted to the Department prior to the *commencement of construction activity*. A copy of the completed, final NOI shall be included in the SWPPP.
2. The SWPPP shall describe the erosion and sediment control practices and where required, post-construction stormwater management practices that will be used and/or constructed to reduce the *pollutants* in stormwater *discharges* and to assure compliance with the terms and conditions of this permit. In addition, the SWPPP shall identify potential sources of pollution which may reasonably be expected to affect the quality of stormwater *discharges*.
3. All SWPPPs that require the post-construction stormwater management practice component shall be prepared by a *qualified professional* that is knowledgeable in the principles and practices of stormwater management and treatment.
4. The *owner or operator* must keep the SWPPP current so that it at all times accurately documents the erosion and sediment controls practices that are being used or will be used during construction, and all post-construction stormwater management practices that will be constructed on the site. At a minimum, the *owner or operator* shall amend the SWPPP, including construction drawings:
 - a. whenever the current provisions prove to be ineffective in minimizing *pollutants* in stormwater *discharges* from the site;

- b. whenever there is a change in design, construction, or operation at the *construction site* that has or could have an effect on the *discharge* of *pollutants*;
 - c. to address issues or deficiencies identified during an inspection by the *qualified inspector*, the Department or other regulatory authority; and
 - d. to document the final construction conditions.
5. The Department may notify the *owner or operator* at any time that the SWPPP does not meet one or more of the minimum requirements of this permit. The notification shall be in writing and identify the provisions of the SWPPP that require modification. Within fourteen (14) calendar days of such notification, or as otherwise indicated by the Department, the *owner or operator* shall make the required changes to the SWPPP and submit written notification to the Department that the changes have been made. If the *owner or operator* does not respond to the Department's comments in the specified time frame, the Department may suspend the *owner's or operator's* coverage under this permit or require the *owner or operator* to obtain coverage under an individual SPDES permit in accordance with Part II.D.4. of this permit.
6. Prior to the *commencement of construction activity*, the *owner or operator* must identify the contractor(s) and subcontractor(s) that will be responsible for installing, constructing, repairing, replacing, inspecting and maintaining the erosion and sediment control practices included in the SWPPP; and the contractor(s) and subcontractor(s) that will be responsible for constructing the post-construction stormwater management practices included in the SWPPP. The *owner or operator* shall have each of the contractors and subcontractors identify at least one person from their company that will be responsible for implementation of the SWPPP. This person shall be known as the *trained contractor*. The *owner or operator* shall ensure that at least one *trained contractor* is on site on a daily basis when soil disturbance activities are being performed.

The *owner or operator* shall have each of the contractors and subcontractors identified above sign a copy of the following certification statement below before they commence any *construction activity*:

"I hereby certify under penalty of law that I understand and agree to comply with the terms and conditions of the SWPPP and agree to implement any corrective actions identified by the *qualified inspector* during a site inspection. I also understand that the *owner or operator* must comply with

the terms and conditions of the most current version of the New York State Pollutant Discharge Elimination System ("SPDES") general permit for stormwater *discharges* from *construction activities* and that it is unlawful for any person to cause or contribute to a violation of *water quality standards*. Furthermore, I am aware that there are significant penalties for submitting false information, that I do not believe to be true, including the possibility of fine and imprisonment for knowing violations"

In addition to providing the certification statement above, the certification page must also identify the specific elements of the SWPPP that each contractor and subcontractor will be responsible for and include the name and title of the person providing the signature; the name and title of the *trained contractor* responsible for SWPPP implementation; the name, address and telephone number of the contracting firm; the address (or other identifying description) of the site; and the date the certification statement is signed. The *owner or operator* shall attach the certification statement(s) to the copy of the SWPPP that is maintained at the *construction site*. If new or additional contractors are hired to implement measures identified in the SWPPP after construction has commenced, they must also sign the certification statement and provide the information listed above.

7. For projects where the Department requests a copy of the SWPPP or inspection reports, the *owner or operator* shall submit the documents in both electronic (PDF only) and paper format within five (5) business days, unless otherwise notified by the Department.

B. Required SWPPP Contents

1. Erosion and sediment control component - All SWPPPs prepared pursuant to this permit shall include erosion and sediment control practices designed in conformance with the technical standard, New York State Standards and Specifications for Erosion and Sediment Control, dated November 2016. Where erosion and sediment control practices are not designed in conformance with the design criteria included in the technical standard, the *owner or operator* must demonstrate *equivalence* to the technical standard. At a minimum, the erosion and sediment control component of the SWPPP shall include the following:
 - a. Background information about the scope of the project, including the location, type and size of project

- b. A site map/construction drawing(s) for the project, including a general location map. At a minimum, the site map shall show the total site area; all improvements; areas of disturbance; areas that will not be disturbed; existing vegetation; on-site and adjacent off-site surface water(s); floodplain/floodway boundaries; wetlands and drainage patterns that could be affected by the *construction activity*; existing and final contours ; locations of different soil types with boundaries; material, waste, borrow or equipment storage areas located on adjacent properties; and location(s) of the stormwater *discharge(s)*;
- c. A description of the soil(s) present at the site, including an identification of the Hydrologic Soil Group (HSG);
- d. A construction phasing plan and sequence of operations describing the intended order of *construction activities*, including clearing and grubbing, excavation and grading, utility and infrastructure installation and any other activity at the site that results in soil disturbance;
- e. A description of the minimum erosion and sediment control practices to be installed or implemented for each *construction activity* that will result in soil disturbance. Include a schedule that identifies the timing of initial placement or implementation of each erosion and sediment control practice and the minimum time frames that each practice should remain in place or be implemented;
- f. A temporary and permanent soil stabilization plan that meets the requirements of this general permit and the technical standard, New York State Standards and Specifications for Erosion and Sediment Control, dated November 2016, for each stage of the project, including initial land clearing and grubbing to project completion and achievement of *final stabilization*;
- g. A site map/construction drawing(s) showing the specific location(s), size(s), and length(s) of each erosion and sediment control practice;
- h. The dimensions, material specifications, installation details, and operation and maintenance requirements for all erosion and sediment control practices. Include the location and sizing of any temporary sediment basins and structural practices that will be used to divert flows from exposed soils;
- i. A maintenance inspection schedule for the contractor(s) identified in Part III.A.6. of this permit, to ensure continuous and effective operation of the erosion and sediment control practices. The maintenance inspection

schedule shall be in accordance with the requirements in the technical standard, New York State Standards and Specifications for Erosion and Sediment Control, dated November 2016;

- j. A description of the pollution prevention measures that will be used to control litter, construction chemicals and construction debris from becoming a *pollutant* source in the stormwater *discharges*;
 - k. A description and location of any stormwater *discharges* associated with industrial activity other than construction at the site, including, but not limited to, stormwater *discharges* from asphalt plants and concrete plants located on the *construction site*; and
 - l. Identification of any elements of the design that are not in conformance with the design criteria in the technical standard, New York State Standards and Specifications for Erosion and Sediment Control, dated November 2016. Include the reason for the deviation or alternative design and provide information which demonstrates that the deviation or alternative design is *equivalent* to the technical standard.
2. Post-construction stormwater management practice component – The *owner or operator* of any construction project identified in Table 2 of Appendix B as needing post-construction stormwater management practices shall prepare a SWPPP that includes practices designed in conformance with the applicable *sizing criteria* in Part I.C.2.a., c. or d. of this permit and the *performance criteria* in the technical standard, New York State Stormwater Management Design Manual dated January 2015

Where post-construction stormwater management practices are not designed in conformance with the *performance criteria* in the technical standard, the *owner or operator* must include in the SWPPP the reason(s) for the deviation or alternative design and provide information which demonstrates that the deviation or alternative design is *equivalent* to the technical standard.

The post-construction stormwater management practice component of the SWPPP shall include the following:

- a. Identification of all post-construction stormwater management practices to be constructed as part of the project. Include the dimensions, material specifications and installation details for each post-construction stormwater management practice;

- b. A site map/construction drawing(s) showing the specific location and size of each post-construction stormwater management practice;
- c. A Stormwater Modeling and Analysis Report that includes:
 - (i) Map(s) showing pre-development conditions, including watershed/subcatchments boundaries, flow paths/routing, and design points;
 - (ii) Map(s) showing post-development conditions, including watershed/subcatchments boundaries, flow paths/routing, design points and post-construction stormwater management practices;
 - (iii) Results of stormwater modeling (i.e. hydrology and hydraulic analysis) for the required storm events. Include supporting calculations (model runs), methodology, and a summary table that compares pre and post-development runoff rates and volumes for the different storm events;
 - (iv) Summary table, with supporting calculations, which demonstrates that each post-construction stormwater management practice has been designed in conformance with the *sizing criteria* included in the Design Manual;
 - (v) Identification of any *sizing criteria* that is not required based on the requirements included in Part I.C. of this permit; and
 - (vi) Identification of any elements of the design that are not in conformance with the *performance criteria* in the Design Manual. Include the reason(s) for the deviation or alternative design and provide information which demonstrates that the deviation or alternative design is *equivalent* to the Design Manual;
- d. Soil testing results and locations (test pits, borings);
- e. Infiltration test results, when required; and
- f. An operations and maintenance plan that includes inspection and maintenance schedules and actions to ensure continuous and effective operation of each post-construction stormwater management practice. The plan shall identify the entity that will be responsible for the long term operation and maintenance of each practice.

3. Enhanced Phosphorus Removal Standards - All construction projects identified in Table 2 of Appendix B that are located in the watersheds identified in Appendix C shall prepare a SWPPP that includes post-construction stormwater management practices designed in conformance with the applicable *sizing criteria* in Part I.C.2. b., c. or d. of this permit and the *performance criteria*, Enhanced Phosphorus Removal Standards included in the Design Manual. At a minimum, the post-construction stormwater management practice component of the SWPPP shall include items 2.a - 2.f. above.

C. Required SWPPP Components by Project Type

Unless otherwise notified by the Department, *owners or operators of construction activities* identified in Table 1 of Appendix B are required to prepare a SWPPP that only includes erosion and sediment control practices designed in conformance with Part III.B.1 of this permit. *Owners or operators of the construction activities* identified in Table 2 of Appendix B shall prepare a SWPPP that also includes post-construction stormwater management practices designed in conformance with Part III.B.2 or 3 of this permit.

Part IV. INSPECTION AND MAINTENANCE REQUIREMENTS

A. General Construction Site Inspection and Maintenance Requirements

1. The *owner or operator* must ensure that all erosion and sediment control practices (including pollution prevention measures) and all post-construction stormwater management practices identified in the SWPPP are inspected and maintained in accordance with Part IV.B. and C. of this permit.
2. The terms of this permit shall not be construed to prohibit the State of New York from exercising any authority pursuant to the ECL, common law or federal law, or prohibit New York State from taking any measures, whether civil or criminal, to prevent violations of the laws of the State of New York or protect the public health and safety and/or the environment.

B. Contractor Maintenance Inspection Requirements

1. The *owner or operator* of each *construction activity* identified in Tables 1 and 2 of Appendix B shall have a *trained contractor* inspect the erosion and sediment control practices and pollution prevention measures being implemented within the active work area daily to ensure that they are being maintained in effective operating condition at all times. If deficiencies are identified, the contractor shall

begin implementing corrective actions within one business day and shall complete the corrective actions in a reasonable time frame.

2. For construction sites where soil disturbance activities have been temporarily suspended (e.g. winter shutdown) and *temporary stabilization* measures have been applied to all disturbed areas, the *trained contractor* can stop conducting the maintenance inspections. The *trained contractor* shall begin conducting the maintenance inspections in accordance with Part IV.B.1. of this permit as soon as soil disturbance activities resume.
3. For construction sites where soil disturbance activities have been shut down with partial project completion, the *trained contractor* can stop conducting the maintenance inspections if all areas disturbed as of the project shutdown date have achieved *final stabilization* and all post-construction stormwater management practices required for the completed portion of the project have been constructed in conformance with the SWPPP and are operational.

C. Qualified Inspector Inspection Requirements

The *owner or operator* shall have a *qualified inspector* conduct site inspections in conformance with the following requirements:

[Note: The *trained contractor* identified in Part III.A.6. and IV.B. of this permit **cannot** conduct the *qualified inspector* site inspections unless they meet the *qualified inspector* qualifications included in Appendix A. In order to perform these inspections, the *trained contractor* would have to be a:

- licensed Professional Engineer,
 - Certified Professional in Erosion and Sediment Control (CPESC),
 - New York State Erosion and Sediment Control Certificate Program holder
 - Registered Landscape Architect, or
 - someone working under the direct supervision of, and at the same company as, the licensed Professional Engineer or Registered Landscape Architect, provided they have received four (4) hours of Department endorsed training in proper erosion and sediment control principles from a Soil and Water Conservation District, or other Department endorsed entity].
1. A *qualified inspector* shall conduct site inspections for all *construction activities* identified in Tables 1 and 2 of Appendix B, with the exception of:
 - a. the construction of a single family residential subdivision with 25% or less *impervious cover* at total site build-out that involves a soil disturbance of one (1) or more acres of land but less than five (5) acres and is not located

in one of the watersheds listed in Appendix C and not directly discharging to one of the 303(d) segments listed in Appendix E;

- b. the construction of a single family home that involves a soil disturbance of one (1) or more acres of land but less than five (5) acres and is not located in one of the watersheds listed in Appendix C and not directly discharging to one of the 303(d) segments listed in Appendix E;
 - c. construction on agricultural property that involves a soil disturbance of one (1) or more acres of land but less than five (5) acres; and
 - d. *construction activities* located in the watersheds identified in Appendix D that involve soil disturbances between five thousand (5,000) square feet and one (1) acre of land.
2. Unless otherwise notified by the Department, the *qualified inspector* shall conduct site inspections in accordance with the following timetable:
- a. For construction sites where soil disturbance activities are on-going, the *qualified inspector* shall conduct a site inspection at least once every seven (7) calendar days.
 - b. For construction sites where soil disturbance activities are on-going and the *owner or operator* has received authorization in accordance with Part II.D.3 to disturb greater than five (5) acres of soil at any one time, the *qualified inspector* shall conduct at least two (2) site inspections every seven (7) calendar days. The two (2) inspections shall be separated by a minimum of two (2) full calendar days.
 - c. For construction sites where soil disturbance activities have been temporarily suspended (e.g. winter shutdown) and *temporary stabilization* measures have been applied to all disturbed areas, the *qualified inspector* shall conduct a site inspection at least once every thirty (30) calendar days. The *owner or operator* shall notify the DOW Water (SPDES) Program contact at the Regional Office (see contact information in Appendix F) or, in areas under the jurisdiction of a *regulated, traditional land use control MS4*, the *regulated, traditional land use control MS4* (provided the *regulated, traditional land use control MS4* is not the *owner or operator* of the *construction activity*) in writing prior to reducing the frequency of inspections.

- d. For construction sites where soil disturbance activities have been shut down with partial project completion, the *qualified inspector* can stop conducting inspections if all areas disturbed as of the project shutdown date have achieved *final stabilization* and all post-construction stormwater management practices required for the completed portion of the project have been constructed in conformance with the SWPPP and are operational. The *owner or operator* shall notify the DOW Water (SPDES) Program contact at the Regional Office (see contact information in Appendix F) or, in areas under the jurisdiction of a *regulated, traditional land use control MS4*, the *regulated, traditional land use control MS4* (provided the *regulated, traditional land use control MS4* is not the *owner or operator* of the *construction activity*) in writing prior to the shutdown. If soil disturbance activities are not resumed within 2 years from the date of shutdown, the *owner or operator* shall have the *qualified inspector* perform a final inspection and certify that all disturbed areas have achieved *final stabilization*, and all temporary, structural erosion and sediment control measures have been removed; and that all post-construction stormwater management practices have been constructed in conformance with the SWPPP by signing the “*Final Stabilization*” and “*Post-Construction Stormwater Management Practice*” certification statements on the NOT. The *owner or operator* shall then submit the completed NOT form to the address in Part II.B.1 of this permit.
 - e. For construction sites that directly *discharge* to one of the 303(d) segments listed in Appendix E or is located in one of the watersheds listed in Appendix C, the *qualified inspector* shall conduct at least two (2) site inspections every seven (7) calendar days. The two (2) inspections shall be separated by a minimum of two (2) full calendar days.
3. At a minimum, the *qualified inspector* shall inspect all erosion and sediment control practices and pollution prevention measures to ensure integrity and effectiveness, all post-construction stormwater management practices under construction to ensure that they are constructed in conformance with the SWPPP, all areas of disturbance that have not achieved *final stabilization*, all points of *discharge* to natural surface waterbodies located within, or immediately adjacent to, the property boundaries of the *construction site*, and all points of *discharge* from the *construction site*.
 4. The *qualified inspector* shall prepare an inspection report subsequent to each and every inspection. At a minimum, the inspection report shall include and/or address the following:

- a. Date and time of inspection;
- b. Name and title of person(s) performing inspection;
- c. A description of the weather and soil conditions (e.g. dry, wet, saturated) at the time of the inspection;
- d. A description of the condition of the runoff at all points of *discharge* from the *construction site*. This shall include identification of any *discharges* of sediment from the *construction site*. Include *discharges* from conveyance systems (i.e. pipes, culverts, ditches, etc.) and overland flow;
- e. A description of the condition of all natural surface waterbodies located within, or immediately adjacent to, the property boundaries of the *construction site* which receive runoff from disturbed areas. This shall include identification of any *discharges* of sediment to the surface waterbody;
- f. Identification of all erosion and sediment control practices and pollution prevention measures that need repair or maintenance;
- g. Identification of all erosion and sediment control practices and pollution prevention measures that were not installed properly or are not functioning as designed and need to be reinstalled or replaced;
- h. Description and sketch of areas with active soil disturbance activity, areas that have been disturbed but are inactive at the time of the inspection, and areas that have been stabilized (temporary and/or final) since the last inspection;
- i. Current phase of construction of all post-construction stormwater management practices and identification of all construction that is not in conformance with the SWPPP and technical standards;
- j. Corrective action(s) that must be taken to install, repair, replace or maintain erosion and sediment control practices and pollution prevention measures; and to correct deficiencies identified with the construction of the post-construction stormwater management practice(s);
- k. Identification and status of all corrective actions that were required by previous inspection; and

- I. Digital photographs, with date stamp, that clearly show the condition of all practices that have been identified as needing corrective actions. The *qualified inspector* shall attach paper color copies of the digital photographs to the inspection report being maintained onsite within seven (7) calendar days of the date of the inspection. The *qualified inspector* shall also take digital photographs, with date stamp, that clearly show the condition of the practice(s) after the corrective action has been completed. The *qualified inspector* shall attach paper color copies of the digital photographs to the inspection report that documents the completion of the corrective action work within seven (7) calendar days of that inspection.
5. Within one business day of the completion of an inspection, the *qualified inspector* shall notify the *owner or operator* and appropriate contractor or subcontractor identified in Part III.A.6. of this permit of any corrective actions that need to be taken. The contractor or subcontractor shall begin implementing the corrective actions within one business day of this notification and shall complete the corrective actions in a reasonable time frame.
6. All inspection reports shall be signed by the *qualified inspector*. Pursuant to Part II.D.2. of this permit, the inspection reports shall be maintained on site with the SWPPP.

Part V. TERMINATION OF PERMIT COVERAGE

A. Termination of Permit Coverage

1. An *owner or operator* that is eligible to terminate coverage under this permit must submit a completed NOT form to the address in Part II.B.1 of this permit. The NOT form shall be one which is associated with this permit, signed in accordance with Part VII.H of this permit.
2. An *owner or operator* may terminate coverage when one or more the following conditions have been met:
 - a. Total project completion - All *construction activity* identified in the SWPPP has been completed; and all areas of disturbance have achieved *final stabilization*; and all temporary, structural erosion and sediment control measures have been removed; and all post-construction stormwater management practices have been constructed in conformance with the SWPPP and are operational;

- b. Planned shutdown with partial project completion - All soil disturbance activities have ceased; and all areas disturbed as of the project shutdown date have achieved *final stabilization*; and all temporary, structural erosion and sediment control measures have been removed; and all post-construction stormwater management practices required for the completed portion of the project have been constructed in conformance with the SWPPP and are operational;
 - c. A new *owner or operator* has obtained coverage under this permit in accordance with Part II.F. of this permit.
 - d. The *owner or operator* obtains coverage under an alternative SPDES general permit or an individual SPDES permit.
3. For *construction activities* meeting subdivision 2a. or 2b. of this Part, the *owner or operator* shall have the *qualified inspector* perform a final site inspection prior to submitting the NOT. The *qualified inspector* shall, by signing the “*Final Stabilization*” and “*Post-Construction Stormwater Management Practice certification statements*” on the NOT, certify that all the requirements in Part V.A.2.a. or b. of this permit have been achieved.
4. For *construction activities* that are subject to the requirements of a *regulated, traditional land use control MS4* and meet subdivision 2a. or 2b. of this Part, the *owner or operator* shall have the *regulated, traditional land use control MS4* sign the “*MS4 Acceptance*” statement on the NOT in accordance with the requirements in Part VII.H. of this permit. The *regulated, traditional land use control MS4* official, by signing this statement, has determined that it is acceptable for the *owner or operator* to submit the NOT in accordance with the requirements of this Part. The *regulated, traditional land use control MS4* can make this determination by performing a final site inspection themselves or by accepting the *qualified inspector’s* final site inspection certification(s) required in Part V.A.3. of this permit.
5. For *construction activities* that require post-construction stormwater management practices and meet subdivision 2a. of this Part, the *owner or operator* must, prior to submitting the NOT, ensure one of the following:
 - a. the post-construction stormwater management practice(s) and any right-of-way(s) needed to maintain such practice(s) have been deeded to the municipality in which the practice(s) is located,

- b. an executed maintenance agreement is in place with the municipality that will maintain the post-construction stormwater management practice(s),
- c. for post-construction stormwater management practices that are privately owned, the *owner or operator* has a mechanism in place that requires operation and maintenance of the practice(s) in accordance with the operation and maintenance plan, such as a deed covenant in the *owner or operator's* deed of record,
- d. for post-construction stormwater management practices that are owned by a public or private institution (e.g. school, university, hospital), government agency or authority, or public utility; the *owner or operator* has policy and procedures in place that ensures operation and maintenance of the practices in accordance with the operation and maintenance plan.

Part VI. REPORTING AND RETENTION RECORDS

A. Record Retention

The *owner or operator* shall retain a copy of the NOI, NOI Acknowledgment Letter, SWPPP, MS4 SWPPP Acceptance form and any inspection reports that were prepared in conjunction with this permit for a period of at least five (5) years from the date that the Department receives a complete NOT submitted in accordance with Part V. of this general permit.

B. Addresses

With the exception of the NOI, NOT, and MS4 SWPPP Acceptance form (which must be submitted to the address referenced in Part II.B.1 of this permit), all written correspondence requested by the Department, including individual permit applications, shall be sent to the address of the appropriate DOW Water (SPDES) Program contact at the Regional Office listed in Appendix F.

Part VII. STANDARD PERMIT CONDITIONS

A. Duty to Comply

The *owner or operator* must comply with all conditions of this permit. All contractors and subcontractors associated with the project must comply with the terms of the SWPPP. Any non-compliance with this permit constitutes a violation of the Clean Water

Act (CWA) and the ECL and is grounds for an enforcement action against the *owner or operator* and/or the contractor/subcontractor; permit revocation, suspension or modification; or denial of a permit renewal application. Upon a finding of significant non-compliance with this permit or the applicable SWPPP, the Department may order an immediate stop to all *construction activity* at the site until the non-compliance is remedied. The stop work order shall be in writing, shall describe the non-compliance in detail, and shall be sent to the *owner or operator*.

If any human remains or archaeological remains are encountered during excavation, the *owner or operator* must immediately cease, or cause to cease, all *construction activity* in the area of the remains and notify the appropriate Regional Water Engineer (RWE). *Construction activity* shall not resume until written permission to do so has been received from the RWE.

B. Continuation of the Expired General Permit

This permit expires five (5) years from the effective date. If a new general permit is not issued prior to the expiration of this general permit, an *owner or operator* with coverage under this permit may continue to operate and *discharge* in accordance with the terms and conditions of this general permit, if it is extended pursuant to the State Administrative Procedure Act and 6 NYCRR Part 621, until a new general permit is issued.

C. Enforcement

Failure of the *owner or operator*, its contractors, subcontractors, agents and/or assigns to strictly adhere to any of the permit requirements contained herein shall constitute a violation of this permit. There are substantial criminal, civil, and administrative penalties associated with violating the provisions of this permit. Fines of up to \$37,500 per day for each violation and imprisonment for up to fifteen (15) years may be assessed depending upon the nature and degree of the offense.

D. Need to Halt or Reduce Activity Not a Defense

It shall not be a defense for an *owner or operator* in an enforcement action that it would have been necessary to halt or reduce the *construction activity* in order to maintain compliance with the conditions of this permit.

E. Duty to Mitigate

The *owner or operator* and its contractors and subcontractors shall take all reasonable steps to *minimize* or prevent any *discharge* in violation of this permit which has a reasonable likelihood of adversely affecting human health or the environment.

F. Duty to Provide Information

The *owner or operator* shall furnish to the Department, within a reasonable specified time period of a written request, all documentation necessary to demonstrate eligibility and any information to determine compliance with this permit or to determine whether cause exists for modifying or revoking this permit, or suspending or denying coverage under this permit, in accordance with the terms and conditions of this permit. The NOI, SWPPP and inspection reports required by this permit are public documents that the *owner or operator* must make available for review and copying by any person within five (5) business days of the *owner or operator* receiving a written request by any such person to review these documents. Copying of documents will be done at the requester's expense.

G. Other Information

When the *owner or operator* becomes aware that they failed to submit any relevant facts, or submitted incorrect information in the NOI or in any of the documents required by this permit, or have made substantive revisions to the SWPPP (e.g. the scope of the project changes significantly, the type of post-construction stormwater management practice(s) changes, there is a reduction in the sizing of the post-construction stormwater management practice, or there is an increase in the disturbance area or *impervious area*), which were not reflected in the original NOI submitted to the Department, they shall promptly submit such facts or information to the Department using the contact information in Part II.A. of this permit. Failure of the *owner or operator* to correct or supplement any relevant facts within five (5) business days of becoming aware of the deficiency shall constitute a violation of this permit.

H. Signatory Requirements

1. All NOIs and NOTs shall be signed as follows:
 - a. For a corporation these forms shall be signed by a responsible corporate officer. For the purpose of this section, a responsible corporate officer means:

- (i) a president, secretary, treasurer, or vice-president of the corporation in charge of a principal business function, or any other person who performs similar policy or decision-making functions for the corporation; or
 - (ii) the manager of one or more manufacturing, production or operating facilities, provided the manager is authorized to make management decisions which govern the operation of the regulated facility including having the explicit or implicit duty of making major capital investment recommendations, and initiating and directing other comprehensive measures to assure long term environmental compliance with environmental laws and regulations; the manager can ensure that the necessary systems are established or actions taken to gather complete and accurate information for permit application requirements; and where authority to sign documents has been assigned or delegated to the manager in accordance with corporate procedures;
 - b. For a partnership or sole proprietorship these forms shall be signed by a general partner or the proprietor, respectively; or
 - c. For a municipality, State, Federal, or other public agency these forms shall be signed by either a principal executive officer or ranking elected official. For purposes of this section, a principal executive officer of a Federal agency includes:
 - (i) the chief executive officer of the agency, or
 - (ii) a senior executive officer having responsibility for the overall operations of a principal geographic unit of the agency (e.g., Regional Administrators of EPA).
2. The SWPPP and other information requested by the Department shall be signed by a person described in Part VII.H.1. of this permit or by a duly authorized representative of that person. A person is a duly authorized representative only if:
- a. The authorization is made in writing by a person described in Part VII.H.1. of this permit;
 - b. The authorization specifies either an individual or a position having responsibility for the overall operation of the regulated facility or activity, such as the position of plant manager, operator of a well or a well field,

superintendent, position of *equivalent* responsibility, or an individual or position having overall responsibility for environmental matters for the company. (A duly authorized representative may thus be either a named individual or any individual occupying a named position) and,

- c. The written authorization shall include the name, title and signature of the authorized representative and be attached to the SWPPP.
3. All inspection reports shall be signed by the *qualified inspector* that performs the inspection.
4. The MS4 SWPPP Acceptance form shall be signed by the principal executive officer or ranking elected official from the *regulated, traditional land use control MS4*, or by a duly authorized representative of that person.

It shall constitute a permit violation if an incorrect and/or improper signatory authorizes any required forms, SWPPP and/or inspection reports.

I. Property Rights

The issuance of this permit does not convey any property rights of any sort, nor any exclusive privileges, nor does it authorize any injury to private property nor any invasion of personal rights, nor any infringement of Federal, State or local laws or regulations. *Owners or operators* must obtain any applicable conveyances, easements, licenses and/or access to real property prior to *commencing construction activity*.

J. Severability

The provisions of this permit are severable, and if any provision of this permit, or the application of any provision of this permit to any circumstance, is held invalid, the application of such provision to other circumstances, and the remainder of this permit shall not be affected thereby.

K. Requirement to Obtain Coverage Under an Alternative Permit

1. The Department may require any owner or operator authorized by this permit to apply for and/or obtain either an individual SPDES permit or another SPDES general permit. When the Department requires any discharger authorized by a general permit to apply for an individual SPDES permit, it shall notify the discharger in writing that a permit application is required. This notice shall

include a brief statement of the reasons for this decision, an application form, a statement setting a time frame for the owner or operator to file the application for an individual SPDES permit, and a deadline, not sooner than 180 days from owner or operator receipt of the notification letter, whereby the authorization to discharge under this general permit shall be terminated. Applications must be submitted to the appropriate Permit Administrator at the Regional Office. The Department may grant additional time upon demonstration, to the satisfaction of the Department, that additional time to apply for an alternative authorization is necessary or where the Department has not provided a permit determination in accordance with Part 621 of this Title.

2. When an individual SPDES permit is issued to a discharger authorized to *discharge* under a general SPDES permit for the same *discharge(s)*, the general permit authorization for outfalls authorized under the individual SPDES permit is automatically terminated on the effective date of the individual permit unless termination is earlier in accordance with 6 NYCRR Part 750.

L. Proper Operation and Maintenance

The *owner or operator* shall at all times properly operate and maintain all facilities and systems of treatment and control (and related appurtenances) which are installed or used by the *owner or operator* to achieve compliance with the conditions of this permit and with the requirements of the SWPPP.

M. Inspection and Entry

The *owner or operator* shall allow an authorized representative of the Department, EPA, applicable county health department, or, in the case of a *construction site* which *discharges* through an *MS4*, an authorized representative of the *MS4* receiving the discharge, upon the presentation of credentials and other documents as may be required by law, to:

1. Enter upon the owner's or operator's premises where a regulated facility or activity is located or conducted or where records must be kept under the conditions of this permit;
2. Have access to and copy at reasonable times, any records that must be kept under the conditions of this permit; and

3. Inspect at reasonable times any facilities or equipment (including monitoring and control equipment), practices or operations regulated or required by this permit.
4. Sample or monitor at reasonable times, for purposes of assuring permit compliance or as otherwise authorized by the Act or ECL, any substances or parameters at any location.

N. Permit Actions

This permit may, at any time, be modified, suspended, revoked, or renewed by the Department in accordance with 6 NYCRR Part 621. The filing of a request by the *owner or operator* for a permit modification, revocation and reissuance, termination, a notification of planned changes or anticipated noncompliance does not limit, diminish and/or stay compliance with any terms of this permit.

O. Definitions

Definitions of key terms are included in Appendix A of this permit.

P. Re-Opener Clause

1. If there is evidence indicating potential or realized impacts on water quality due to any stormwater discharge associated with construction activity covered by this permit, the owner or operator of such discharge may be required to obtain an individual permit or alternative general permit in accordance with Part VII.K. of this permit or the permit may be modified to include different limitations and/or requirements.
2. Any Department initiated permit modification, suspension or revocation will be conducted in accordance with 6 NYCRR Part 621, 6 NYCRR 750-1.18, and 6 NYCRR 750-1.20.

Q. Penalties for Falsification of Forms and Reports

In accordance with 6NYCRR Part 750-2.4 and 750-2.5, any person who knowingly makes any false material statement, representation, or certification in any application, record, report or other document filed or required to be maintained under this permit, including reports of compliance or noncompliance shall, upon conviction, be punished in accordance with ECL §71-1933 and or Articles 175 and 210 of the New York State Penal Law.

R. Other Permits

Nothing in this permit relieves the *owner or operator* from a requirement to obtain any other permits required by law.

APPENDIX A – Acronyms and Definitions

Acronyms

APO – Agency Preservation Officer

BMP – Best Management Practice

CPESC – Certified Professional in Erosion and Sediment Control

Cpv – Channel Protection Volume

CWA – Clean Water Act (or the Federal Water Pollution Control Act, 33 U.S.C. §1251 et seq)

DOW – Division of Water

EAF – Environmental Assessment Form

ECL - Environmental Conservation Law

EPA – U. S. Environmental Protection Agency

HSG – Hydrologic Soil Group

MS4 – Municipal Separate Storm Sewer System

NOI – Notice of Intent

NOT – Notice of Termination

NPDES – National Pollutant Discharge Elimination System

OPRHP – Office of Parks, Recreation and Historic Places

Qf – Extreme Flood

Qp – Overbank Flood

RRv – Runoff Reduction Volume

RWE – Regional Water Engineer

SEQR – State Environmental Quality Review

SEQRA - State Environmental Quality Review Act

SHPA – State Historic Preservation Act

SPDES – State Pollutant Discharge Elimination System

SWPPP – Stormwater Pollution Prevention Plan

TMDL – Total Maximum Daily Load

UPA – Uniform Procedures Act

USDA – United States Department of Agriculture

WQv – Water Quality Volume

Definitions

All definitions in this section are solely for the purposes of this permit.

Agricultural Building – a structure designed and constructed to house farm implements, hay, grain, poultry, livestock or other horticultural products; excluding any structure designed, constructed or used, in whole or in part, for human habitation, as a place of employment where agricultural products are processed, treated or packaged, or as a place used by the public.

Agricultural Property – means the land for construction of a barn, *agricultural building*, silo, stockyard, pen or other structural practices identified in Table II in the “Agricultural Management Practices Catalog for Nonpoint Source Pollution in New York State” prepared by the Department in cooperation with agencies of New York Nonpoint Source Coordinating Committee (dated June 2007).

Alter Hydrology from Pre to Post-Development Conditions - means the post-development peak flow rate(s) has increased by more than 5% of the pre-developed condition for the design storm of interest (e.g. 10 yr and 100 yr).

Combined Sewer - means a sewer that is designed to collect and convey both “sewage” and “stormwater”.

Commence (Commencement of) Construction Activities - means the initial disturbance of soils associated with clearing, grading or excavation activities; or other construction related activities that disturb or expose soils such as demolition, stockpiling of fill material, and the initial installation of erosion and sediment control practices required in the SWPPP. See definition for “*Construction Activity(ies)*” also.

Construction Activity(ies) - means any clearing, grading, excavation, filling, demolition or stockpiling activities that result in soil disturbance. Clearing activities can include, but are not limited to, logging equipment operation, the cutting and skidding of trees, stump removal and/or brush root removal. Construction activity does not include routine maintenance that is performed to maintain the original line and grade, hydraulic capacity, or original purpose of a facility.

Construction Site – means the land area where *construction activity(ies)* will occur. See definition for “*Commence (Commencement of) Construction Activities*” and “*Larger Common Plan of Development or Sale*” also.

Dewatering – means the act of draining rainwater and/or groundwater from building foundations, vaults or excavations/trenches.

Direct Discharge (to a specific surface waterbody) - means that runoff flows from a *construction site* by overland flow and the first point of discharge is the specific surface waterbody, or runoff flows from a *construction site* to a separate storm sewer system

and the first point of discharge from the separate storm sewer system is the specific surface waterbody.

Discharge(s) - means any addition of any pollutant to waters of the State through an outlet or *point source*.

Embankment –means an earthen or rock slope that supports a road/highway.

Endangered or Threatened Species – see 6 NYCRR Part 182 of the Department’s rules and regulations for definition of terms and requirements.

Environmental Conservation Law (ECL) - means chapter 43-B of the Consolidated Laws of the State of New York, entitled the Environmental Conservation Law.

Equivalent (Equivalence) – means that the practice or measure meets all the performance, longevity, maintenance, and safety objectives of the technical standard and will provide an equal or greater degree of water quality protection.

Final Stabilization - means that all soil disturbance activities have ceased and a uniform, perennial vegetative cover with a density of eighty (80) percent over the entire pervious surface has been established; or other equivalent stabilization measures, such as permanent landscape mulches, rock rip-rap or washed/crushed stone have been applied on all disturbed areas that are not covered by permanent structures, concrete or pavement.

General SPDES permit - means a SPDES permit issued pursuant to 6 NYCRR Part 750-1.21 and Section 70-0117 of the ECL authorizing a category of discharges.

Groundwater(s) - means waters in the saturated zone. The saturated zone is a subsurface zone in which all the interstices are filled with water under pressure greater than that of the atmosphere. Although the zone may contain gas-filled interstices or interstices filled with fluids other than water, it is still considered saturated.

Historic Property – means any building, structure, site, object or district that is listed on the State or National Registers of Historic Places or is determined to be eligible for listing on the State or National Registers of Historic Places.

Impervious Area (Cover) - means all impermeable surfaces that cannot effectively infiltrate rainfall. This includes paved, concrete and gravel surfaces (i.e. parking lots, driveways, roads, runways and sidewalks); building rooftops and miscellaneous impermeable structures such as patios, pools, and sheds.

Infeasible – means not technologically possible, or not economically practicable and achievable in light of best industry practices.

Larger Common Plan of Development or Sale - means a contiguous area where multiple separate and distinct *construction activities* are occurring, or will occur, under one plan. The term “plan” in “larger common plan of development or sale” is broadly defined as any announcement or piece of documentation (including a sign, public notice or hearing, marketing plan, advertisement, drawing, permit application, State Environmental Quality Review Act (SEQRA) environmental assessment form or other documents, zoning request, computer design, etc.) or physical demarcation (including boundary signs, lot stakes, surveyor markings, etc.) indicating that *construction activities* may occur on a specific plot.

For discrete construction projects that are located within a larger common plan of development or sale that are at least 1/4 mile apart, each project can be treated as a separate plan of development or sale provided any interconnecting road, pipeline or utility project that is part of the same “common plan” is not concurrently being disturbed.

Minimize – means reduce and/or eliminate to the extent achievable using control measures (including best management practices) that are technologically available and economically practicable and achievable in light of best industry practices.

Municipal Separate Storm Sewer (MS4) - a conveyance or system of conveyances (including roads with drainage systems, municipal streets, catch basins, curbs, gutters, ditches, man-made channels, or storm drains):

- (i) Owned or operated by a State, city, town, borough, county, parish, district, association, or other public body (created by or pursuant to State law) having jurisdiction over disposal of sewage, industrial wastes, stormwater, or other wastes, including special districts under State law such as a sewer district, flood control district or drainage district, or similar entity, or an Indian tribe or an authorized Indian tribal organization, or a designated and approved management agency under section 208 of the CWA that discharges to surface waters of the State;
- (ii) Designed or used for collecting or conveying stormwater;
- (iii) Which is not a *combined sewer*, and
- (iv) Which is not part of a Publicly Owned Treatment Works (POTW) as defined at 40 CFR 122.2.

National Pollutant Discharge Elimination System (NPDES) - means the national system for the issuance of wastewater and stormwater permits under the Federal Water Pollution Control Act (Clean Water Act).

Natural Buffer –means an undisturbed area with natural cover running along a surface water (e.g. wetland, stream, river, lake, etc.).

New Development – means any land disturbance that does not meet the definition of Redevelopment Activity included in this appendix.

New York State Erosion and Sediment Control Certificate Program – a certificate program that establishes and maintains a process to identify and recognize individuals who are capable of developing, designing, inspecting and maintaining erosion and sediment control plans on projects that disturb soils in New York State. The certificate program is administered by the New York State Conservation District Employees Association.

NOI Acknowledgment Letter - means the letter that the Department sends to an owner or operator to acknowledge the Department's receipt and acceptance of a complete Notice of Intent. This letter documents the owner's or operator's authorization to discharge in accordance with the general permit for stormwater discharges from *construction activity*.

Nonpoint Source - means any source of water pollution or pollutants which is not a discrete conveyance or *point source* permitted pursuant to Title 7 or 8 of Article 17 of the Environmental Conservation Law (see ECL Section 17-1403).

Overbank –means flow events that exceed the capacity of the stream channel and spill out into the adjacent floodplain.

Owner or Operator - means the person, persons or legal entity which owns or leases the property on which the *construction activity* is occurring; an entity that has operational control over the construction plans and specifications, including the ability to make modifications to the plans and specifications; and/or an entity that has day-to-day operational control of those activities at a project that are necessary to ensure compliance with the permit conditions.

Performance Criteria – means the design criteria listed under the “Required Elements” sections in Chapters 5, 6 and 10 of the technical standard, New York State Stormwater Management Design Manual, dated January 2015. It does not include the Sizing Criteria (i.e. WQv, RRv, Cpv, Qp and Qf) in Part I.C.2. of the permit.

Point Source - means any discernible, confined and discrete conveyance, including but not limited to any pipe, ditch, channel, tunnel, conduit, well, discrete fissure, container, rolling stock, concentrated animal feeding operation, vessel or other floating craft, or landfill leachate collection system from which *pollutants* are or may be discharged.

Pollutant - means dredged spoil, filter backwash, solid waste, incinerator residue, sewage, garbage, sewage sludge, munitions, chemical wastes, biological materials, radioactive materials, heat, wrecked or discarded equipment, rock, sand and industrial, municipal, agricultural waste and ballast discharged into water; which may cause or might reasonably be expected to cause pollution of the waters of the state in contravention of the standards or guidance values adopted as provided in 6 NYCRR Parts 700 et seq .

Qualified Inspector - means a person that is knowledgeable in the principles and practices of erosion and sediment control, such as a licensed Professional Engineer, Certified Professional in Erosion and Sediment Control (CPESC), Registered Landscape Architect, New York State Erosion and Sediment Control Certificate Program holder or other Department endorsed individual(s).

It can also mean someone working under the direct supervision of, and at the same company as, the licensed Professional Engineer or Registered Landscape Architect, provided that person has training in the principles and practices of erosion and sediment control. Training in the principles and practices of erosion and sediment control means that the individual working under the direct supervision of the licensed Professional Engineer or Registered Landscape Architect has received four (4) hours of Department endorsed training in proper erosion and sediment control principles from a Soil and Water Conservation District, or other Department endorsed entity. After receiving the initial training, the individual working under the direct supervision of the licensed Professional Engineer or Registered Landscape Architect shall receive four (4) hours of training every three (3) years.

It can also mean a person that meets the *Qualified Professional* qualifications in addition to the *Qualified Inspector* qualifications.

Note: Inspections of any post-construction stormwater management practices that include structural components, such as a dam for an impoundment, shall be performed by a licensed Professional Engineer.

Qualified Professional - means a person that is knowledgeable in the principles and practices of stormwater management and treatment, such as a licensed Professional Engineer, Registered Landscape Architect or other Department endorsed individual(s). Individuals preparing SWPPPs that require the post-construction stormwater management practice component must have an understanding of the principles of hydrology, water quality management practice design, water quantity control design, and, in many cases, the principles of hydraulics. All components of the SWPPP that involve the practice of engineering, as defined by the NYS Education Law (see Article 145), shall be prepared by, or under the direct supervision of, a professional engineer licensed to practice in the State of New York.

Redevelopment Activity(ies) – means the disturbance and reconstruction of existing impervious area, including impervious areas that were removed from a project site within five (5) years of preliminary project plan submission to the local government (i.e. site plan, subdivision, etc.).

Regulated, Traditional Land Use Control MS4 - means a city, town or village with land use control authority that is authorized to discharge under New York State DEC's

SPDES General Permit For Stormwater Discharges from Municipal Separate Stormwater Sewer Systems (MS4s) or the City of New York's Individual SPDES Permit for their Municipal Separate Storm Sewer Systems (NY-0287890).

Routine Maintenance Activity - means *construction activity* that is performed to maintain the original line and grade, hydraulic capacity, or original purpose of a facility, including, but not limited to:

- Re-grading of gravel roads or parking lots,
- Cleaning and shaping of existing roadside ditches and culverts that maintains the approximate original line and grade, and hydraulic capacity of the ditch,
- Cleaning and shaping of existing roadside ditches that does not maintain the approximate original grade, hydraulic capacity and purpose of the ditch if the changes to the line and grade, hydraulic capacity or purpose of the ditch are installed to improve water quality and quantity controls (e.g. installing grass lined ditch),
- Placement of aggregate shoulder backing that stabilizes the transition between the road shoulder and the ditch or *embankment*,
- Full depth milling and filling of existing asphalt pavements, replacement of concrete pavement slabs, and similar work that does not expose soil or disturb the bottom six (6) inches of subbase material,
- Long-term use of equipment storage areas at or near highway maintenance facilities,
- Removal of sediment from the edge of the highway to restore a previously existing sheet-flow drainage connection from the highway surface to the highway ditch or *embankment*,
- Existing use of Canal Corp owned upland disposal sites for the canal, and
- Replacement of curbs, gutters, sidewalks and guide rail posts.

Site limitations – means site conditions that prevent the use of an infiltration technique and or infiltration of the total WQv. Typical site limitations include: seasonal high groundwater, shallow depth to bedrock, and soils with an infiltration rate less than 0.5 inches/hour. The existence of site limitations shall be confirmed and documented using actual field testing (i.e. test pits, soil borings, and infiltration test) or using information from the most current United States Department of Agriculture (USDA) Soil Survey for the County where the project is located.

Sizing Criteria – means the criteria included in Part I.C.2 of the permit that are used to size post-construction stormwater management control practices. The criteria include; Water Quality Volume (WQv), Runoff Reduction Volume (RRv), Channel Protection Volume (Cpv), *Overbank Flood* (Qp), and *Extreme Flood* (Qf).

State Pollutant Discharge Elimination System (SPDES) - means the system established pursuant to Article 17 of the ECL and 6 NYCRR Part 750 for issuance of permits authorizing discharges to the waters of the state.

Steep Slope – means land area designated on the current United States Department of Agriculture (“USDA”) Soil Survey as Soil Slope Phase “D”, (provided the map unit name is inclusive of slopes greater than 25%) , or Soil Slope Phase E or F, (regardless of the map unit name), or a combination of the three designations.

Streambank – as used in this permit, means the terrain alongside the bed of a creek or stream. The bank consists of the sides of the channel, between which the flow is confined.

Stormwater Pollution Prevention Plan (SWPPP) – means a project specific report, including construction drawings, that among other things: describes the construction activity(ies), identifies the potential sources of pollution at the *construction site*; describes and shows the stormwater controls that will be used to control the pollutants (i.e. erosion and sediment controls; for many projects, includes post-construction stormwater management controls); and identifies procedures the *owner or operator* will implement to comply with the terms and conditions of the permit. See Part III of the permit for a complete description of the information that must be included in the SWPPP.

Surface Waters of the State - shall be construed to include lakes, bays, sounds, ponds, impounding reservoirs, springs, rivers, streams, creeks, estuaries, marshes, inlets, canals, the Atlantic ocean within the territorial seas of the state of New York and all other bodies of surface water, natural or artificial, inland or coastal, fresh or salt, public or private (except those private waters that do not combine or effect a junction with natural surface waters), which are wholly or partially within or bordering the state or within its jurisdiction. Waters of the state are further defined in 6 NYCRR Parts 800 to 941.

Temporarily Ceased – means that an existing disturbed area will not be disturbed again within 14 calendar days of the previous soil disturbance.

Temporary Stabilization - means that exposed soil has been covered with material(s) as set forth in the technical standard, New York Standards and Specifications for Erosion and Sediment Control, to prevent the exposed soil from eroding. The materials can include, but are not limited to, mulch, seed and mulch, and erosion control mats (e.g. jute twisted yarn, excelsior wood fiber mats).

Total Maximum Daily Loads (TMDLs) - A TMDL is the sum of the allowable loads of a single pollutant from all contributing point and *nonpoint sources*. It is a calculation of the maximum amount of a pollutant that a waterbody can receive on a daily basis and still meet *water quality standards*, and an allocation of that amount to the pollutant's sources. A TMDL stipulates wasteload allocations (WLAs) for *point source* discharges, load allocations (LAs) for *nonpoint sources*, and a margin of safety (MOS).

Trained Contractor - means an employee from the contracting (construction) company, identified in Part III.A.6., that has received four (4) hours of Department endorsed

training in proper erosion and sediment control principles from a Soil and Water Conservation District, or other Department endorsed entity. After receiving the initial training, the *trained contractor* shall receive four (4) hours of training every three (3) years.

It can also mean an employee from the contracting (construction) company, identified in Part III.A.6., that meets the *qualified inspector* qualifications (e.g. licensed Professional Engineer, Certified Professional in Erosion and Sediment Control (CPESC), Registered Landscape Architect, New York State Erosion and Sediment Control Certificate Program holder, or someone working under the direct supervision of, and at the same company as, the licensed Professional Engineer or Registered Landscape Architect, provided they have received four (4) hours of Department endorsed training in proper erosion and sediment control principles from a Soil and Water Conservation District, or other Department endorsed entity).

The *trained contractor* is responsible for the day to day implementation of the SWPPP.

Uniform Procedures Act (UPA) Permit - means a permit required under 6 NYCRR Part 621 of the Environmental Conservation Law (ECL), Article 70.

Water Quality Standard - means such measures of purity or quality for any waters in relation to their reasonable and necessary use as promulgated in 6 NYCRR Part 700 et seq.

APPENDIX B – Required SWPPP Components by Project Type

Table 1
Construction Activities that Require the Preparation of a SWPPP That Only Includes Erosion and Sediment Controls

<p>The following construction activities that involve soil disturbances of one (1) or more acres of land, but less than five (5) acres:</p> <ul style="list-style-type: none">• Single family home <u>not</u> located in one of the watersheds listed in Appendix C or <u>not directly discharging</u> to one of the 303(d) segments listed in Appendix E• Single family residential subdivisions with 25% or less impervious cover at total site build-out and <u>not</u> located in one of the watersheds listed in Appendix C and <u>not</u> directly discharging to one of the 303(d) segments listed in Appendix E• Construction of a barn or other <i>agricultural building</i>, silo, stock yard or pen.
<p>The following construction activities that involve soil disturbances between five thousand (5000) square feet and one (1) acre of land:</p> <p>All construction activities located in the watersheds identified in Appendix D that involve soil disturbances between five thousand (5,000) square feet and one (1) acre of land.</p>
<p>The following construction activities that involve soil disturbances of one (1) or more acres of land:</p> <ul style="list-style-type: none">• Installation of underground, linear utilities; such as gas lines, fiber-optic cable, cable TV, electric, telephone, sewer mains, and water mains• Environmental enhancement projects, such as wetland mitigation projects, stormwater retrofits and stream restoration projects• Pond construction• Linear bike paths running through areas with vegetative cover, including bike paths surfaced with an impervious cover• Cross-country ski trails and walking/hiking trails• Sidewalk, bike path or walking path projects, surfaced with an impervious cover, that are not part of residential, commercial or institutional development;• Sidewalk, bike path or walking path projects, surfaced with an impervious cover, that include incidental shoulder or curb work along an existing highway to support construction of the sidewalk, bike path or walking path.• Slope stabilization projects• Slope flattening that changes the grade of the site, but does not significantly change the runoff characteristics

Table 1 (Continued) CONSTRUCTION ACTIVITIES THAT REQUIRE THE PREPARATION OF A SWPPP THAT ONLY INCLUDES EROSION AND SEDIMENT CONTROLS

The following construction activities that involve soil disturbances of one (1) or more acres of land:

- Spoil areas that will be covered with vegetation
- Vegetated open space projects (i.e. recreational parks, lawns, meadows, fields, downhill ski trails) excluding projects that *alter hydrology from pre to post development* conditions,
- Athletic fields (natural grass) that do not include the construction or reconstruction of *impervious area* and do not *alter hydrology from pre to post development* conditions
- Demolition project where vegetation will be established, and no redevelopment is planned
- Overhead electric transmission line project that does not include the construction of permanent access roads or parking areas surfaced with *impervious cover*
- Structural practices as identified in Table II in the “Agricultural Management Practices Catalog for Nonpoint Source Pollution in New York State”, excluding projects that involve soil disturbances of greater than five acres and construction activities that include the construction or reconstruction of impervious area
- Temporary access roads, median crossovers, detour roads, lanes, or other temporary impervious areas that will be restored to pre-construction conditions once the construction activity is complete

Table 2
CONSTRUCTION ACTIVITIES THAT REQUIRE THE PREPARATION OF A SWPPP THAT INCLUDES
POST-CONSTRUCTION STORMWATER MANAGEMENT PRACTICES

The following construction activities that involve soil disturbances of one (1) or more acres of land:

- Single family home located in one of the watersheds listed in Appendix C or *directly discharging* to one of the 303(d) segments listed in Appendix E
- Single family home that disturbs five (5) or more acres of land
- Single family residential subdivisions located in one of the watersheds listed in Appendix C or *directly discharging* to one of the 303(d) segments listed in Appendix E
- Single family residential subdivisions that involve soil disturbances of between one (1) and five (5) acres of land with greater than 25% impervious cover at total site build-out
- Single family residential subdivisions that involve soil disturbances of five (5) or more acres of land, and single family residential subdivisions that involve soil disturbances of less than five (5) acres that are part of a larger common plan of development or sale that will ultimately disturb five or more acres of land
- Multi-family residential developments; includes duplexes, townhomes, condominiums, senior housing complexes, apartment complexes, and mobile home parks
- Airports
- Amusement parks
- Breweries, cideries, and wineries, including establishments constructed on agricultural land
- Campgrounds
- Cemeteries that include the construction or reconstruction of impervious area (>5% of disturbed area) or *alter the hydrology from pre to post development* conditions
- Commercial developments
- Churches and other places of worship
- Construction of a barn or other *agricultural building* (e.g. silo) and structural practices as identified in Table II in the "Agricultural Management Practices Catalog for Nonpoint Source Pollution in New York State" that include the construction or reconstruction of *impervious area*, excluding projects that involve soil disturbances of less than five acres.
- Golf courses
- Institutional development; includes hospitals, prisons, schools and colleges
- Industrial facilities; includes industrial parks
- Landfills
- Municipal facilities; includes highway garages, transfer stations, office buildings, POTW's, water treatment plants, and water storage tanks
- Office complexes
- Playgrounds that include the construction or reconstruction of impervious area
- Sports complexes
- Racetracks; includes racetracks with earthen (dirt) surface
- Road construction or reconstruction, including roads constructed as part of the construction activities listed in Table 1

Table 2 (Continued)

CONSTRUCTION ACTIVITIES THAT REQUIRE THE PREPARATION OF A SWPPP THAT INCLUDES POST-CONSTRUCTION STORMWATER MANAGEMENT PRACTICES

The following construction activities that involve soil disturbances of one (1) or more acres of land:

- Parking lot construction or reconstruction, including parking lots constructed as part of the construction activities listed in Table 1
- Athletic fields (natural grass) that include the construction or reconstruction of impervious area (>5% of disturbed area) or *alter the hydrology from pre to post development* conditions
- Athletic fields with artificial turf
- Permanent access roads, parking areas, substations, compressor stations and well drilling pads, surfaced with *impervious cover*, and constructed as part of an over-head electric transmission line project, wind-power project, cell tower project, oil or gas well drilling project, sewer or water main project or other linear utility project
- Sidewalk, bike path or walking path projects, surfaced with an impervious cover, that are part of a residential, commercial or institutional development
- Sidewalk, bike path or walking path projects, surfaced with an impervious cover, that are part of a highway construction or reconstruction project
- All other construction activities that include the construction or reconstruction of *impervious area* or *alter the hydrology from pre to post development* conditions, and are not listed in Table 1

APPENDIX C – Watersheds Requiring Enhanced Phosphorus Removal

Watersheds where *owners or operators* of construction activities identified in Table 2 of Appendix B must prepare a SWPPP that includes post-construction stormwater management practices designed in conformance with the Enhanced Phosphorus Removal Standards included in the technical standard, New York State Stormwater Management Design Manual (“Design Manual”).

- Entire New York City Watershed located east of the Hudson River - Figure 1
- Onondaga Lake Watershed - Figure 2
- Greenwood Lake Watershed -Figure 3
- Oscawana Lake Watershed – Figure 4
- Kinderhook Lake Watershed – Figure 5

Figure 1 - New York City Watershed East of the Hudson

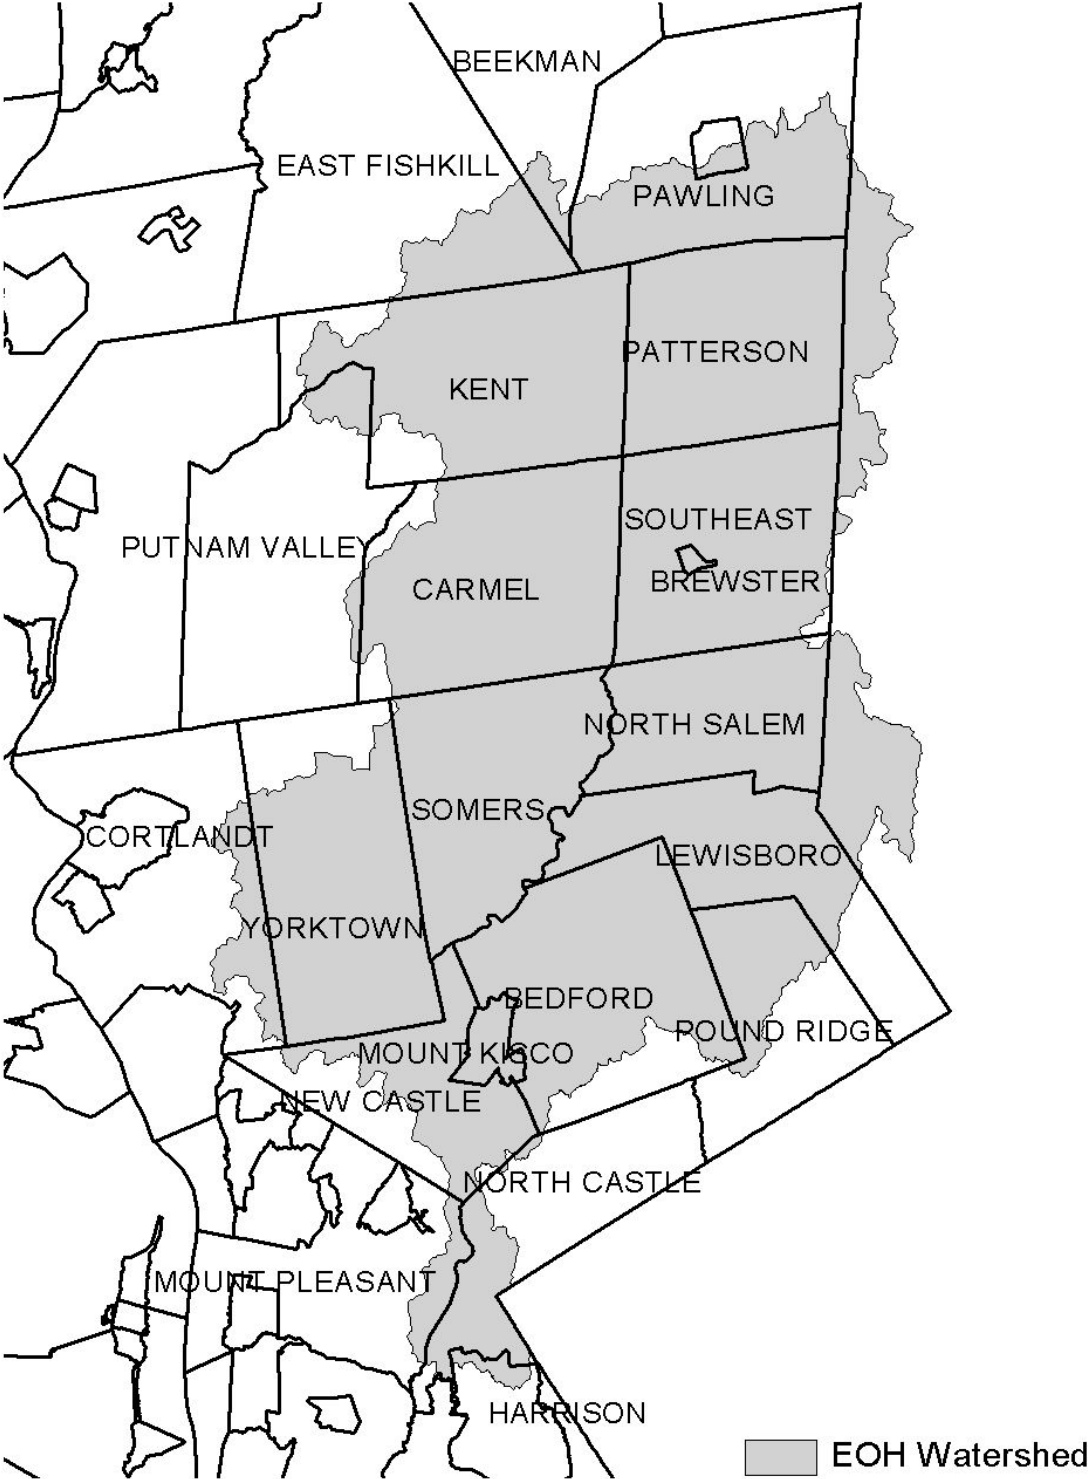


Figure 2 - Onondaga Lake Watershed



Figure 3 - Greenwood Lake Watershed

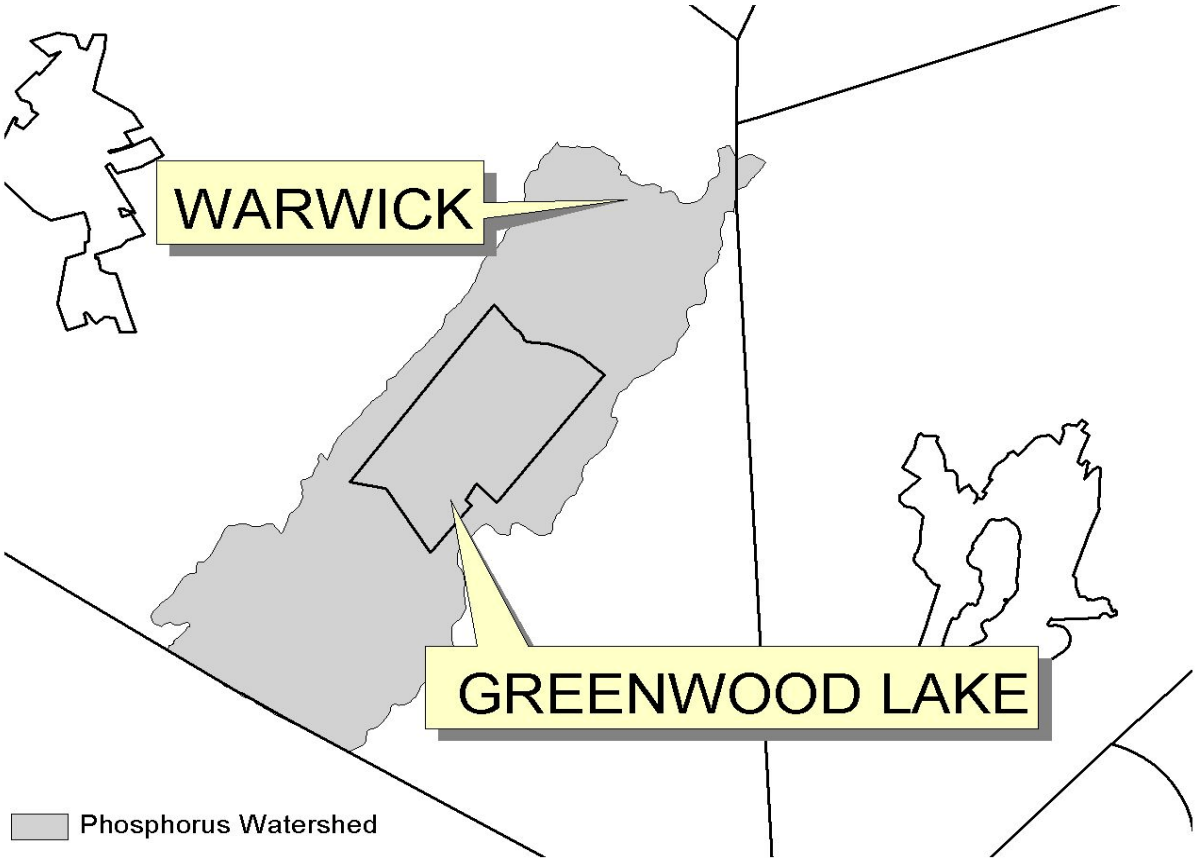


Figure 4 - Oscawana Lake Watershed


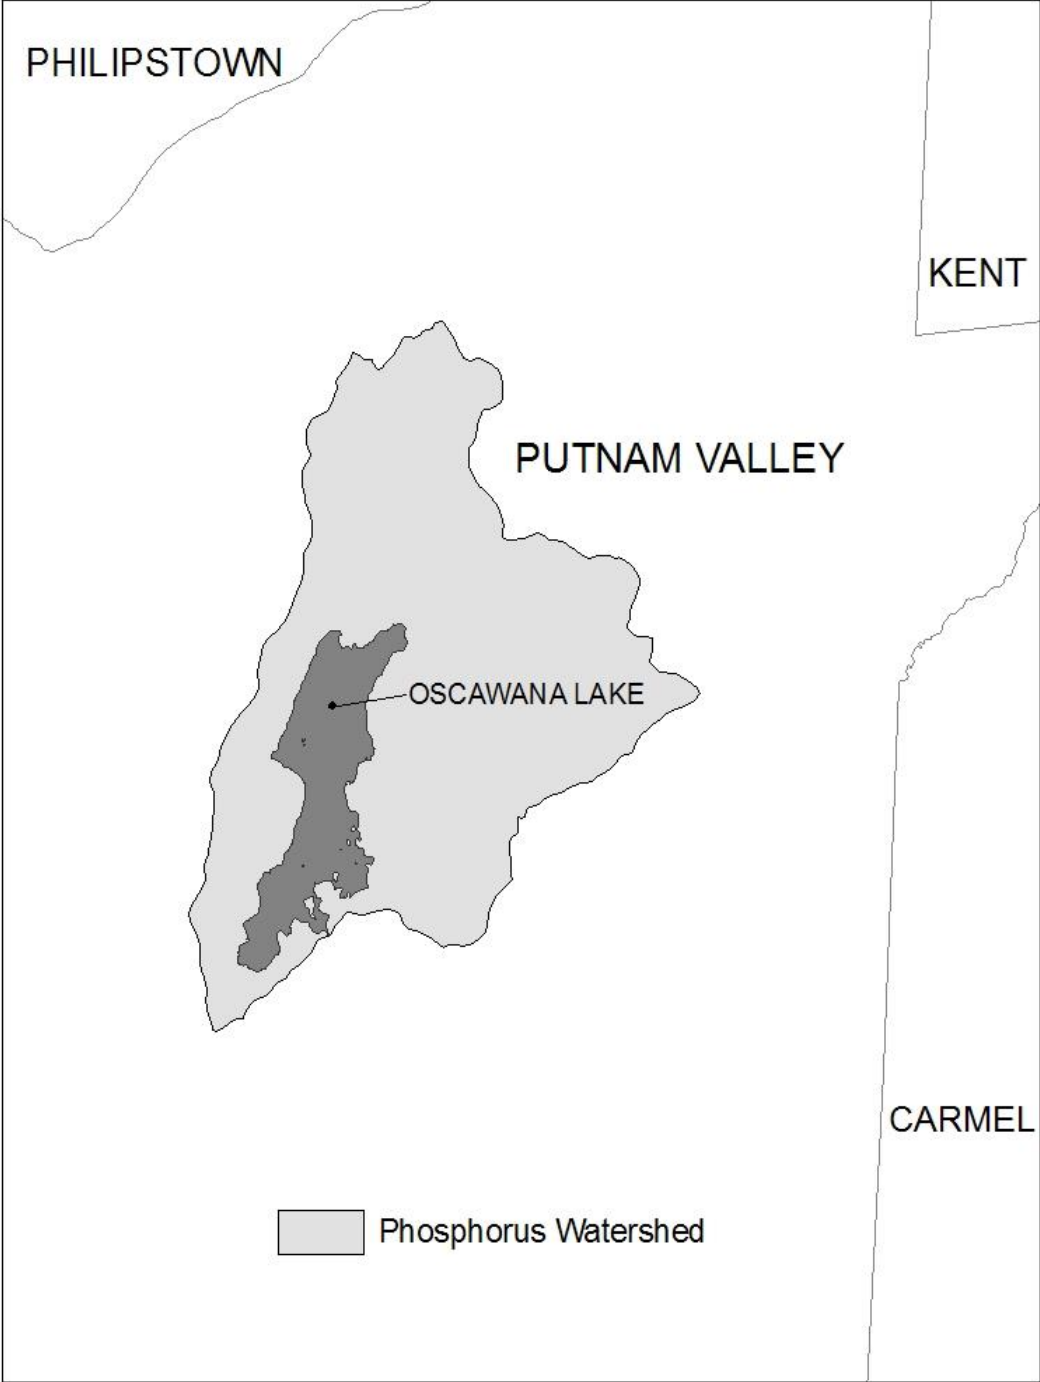


Figure 5 - Kinderhook Lake Watershed

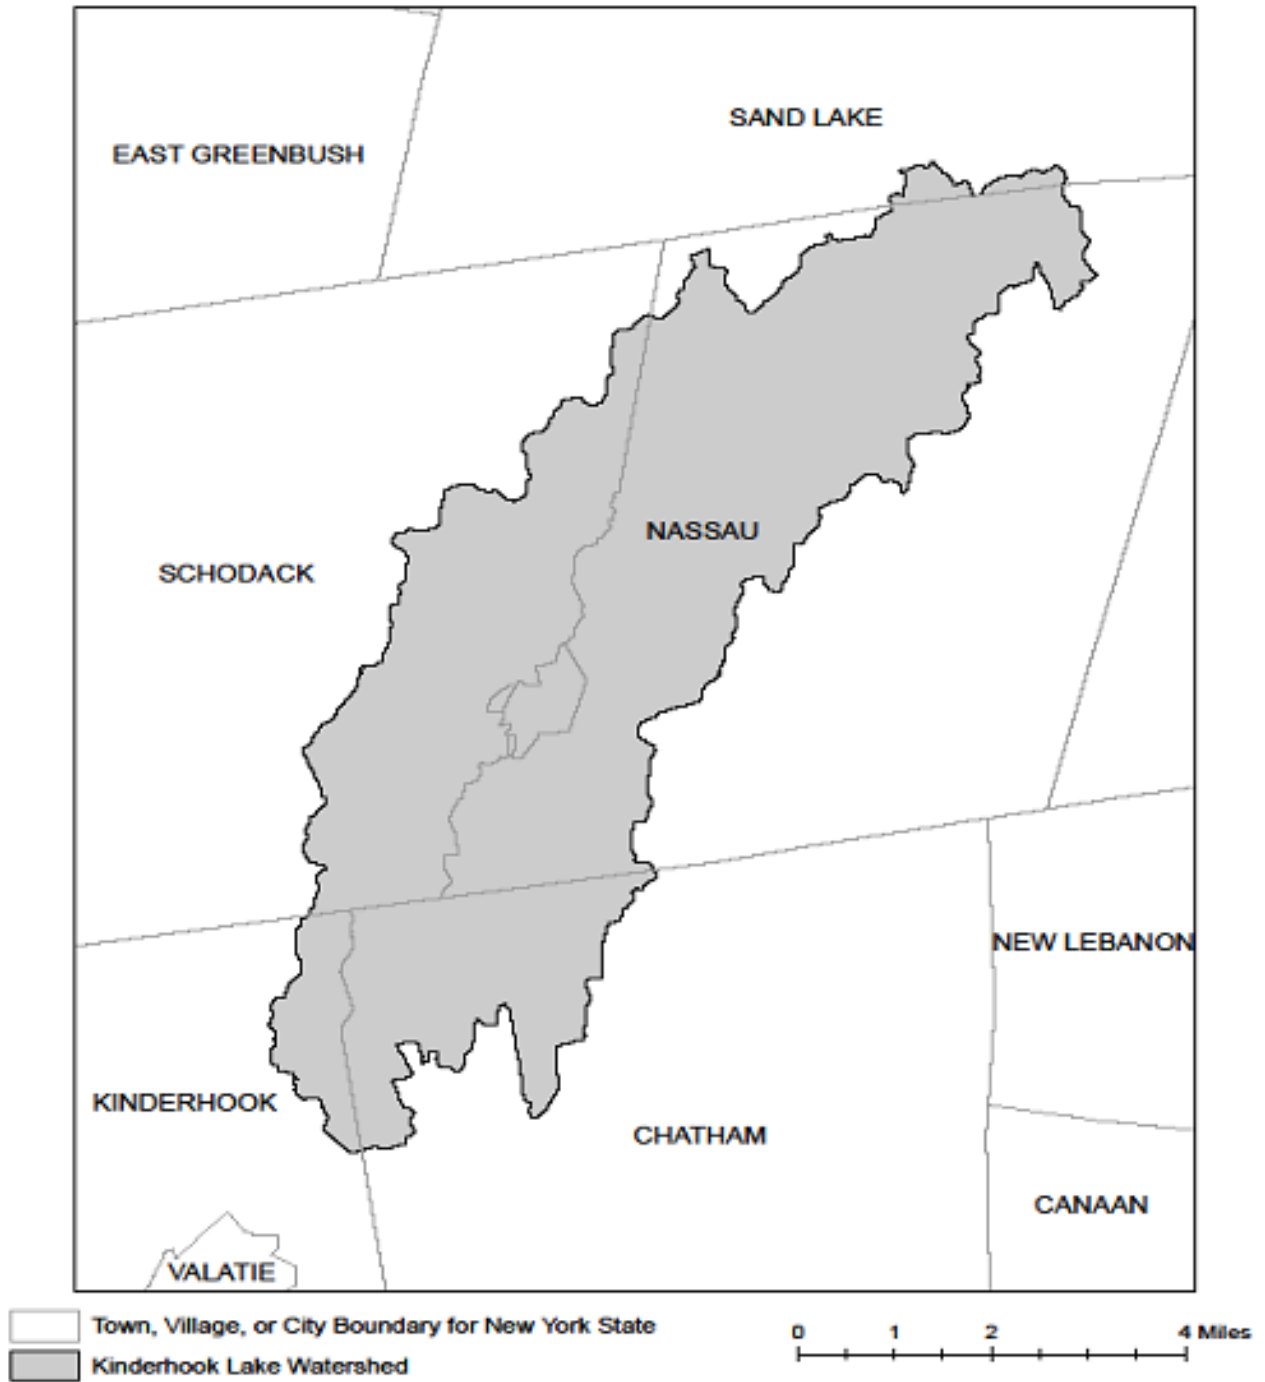

APPENDIX D – Watersheds with Lower Disturbance Threshold

Watersheds where *owners or operators* of construction activities that involve soil disturbances between five thousand (5000) square feet and one (1) acre of land must obtain coverage under this permit.

Entire New York City Watershed that is located east of the Hudson River - See Figure 1 in Appendix C

APPENDIX E – 303(d) Segments Impaired by Construction Related Pollutant(s)

List of 303(d) segments impaired by pollutants related to *construction activity* (e.g. silt, sediment or nutrients). The list was developed using "The Final New York State 2016 Section 303(d) List of Impaired Waters Requiring a TMDL/Other Strategy" dated November 2016. *Owners or operators* of single family home and single family residential subdivisions with 25% or less total impervious cover at total site build-out that involve soil disturbances of one or more acres of land, but less than 5 acres, and *directly discharge* to one of the listed segments below shall prepare a SWPPP that includes post-construction stormwater management practices designed in conformance with the New York State Stormwater Management Design Manual ("Design Manual"), dated January 2015.

COUNTY	WATERBODY	POLLUTANT
Albany	Ann Lee (Shakers) Pond, Stump Pond	Nutrients
Albany	Basic Creek Reservoir	Nutrients
Allegany	Amity Lake, Saunders Pond	Nutrients
Bronx	Long Island Sound, Bronx	Nutrients
Bronx	Van Cortlandt Lake	Nutrients
Broome	Fly Pond, Deer Lake, Sky Lake	Nutrients
Broome	Minor Tribs to Lower Susquehanna (north)	Nutrients
Broome	Whitney Point Lake/Reservoir	Nutrients
Cattaraugus	Allegheny River/Reservoir	Nutrients
Cattaraugus	Beaver (Alma) Lake	Nutrients
Cattaraugus	Case Lake	Nutrients
Cattaraugus	Linlyco/Club Pond	Nutrients
Cayuga	Duck Lake	Nutrients
Cayuga	Little Sodus Bay	Nutrients
Chautauqua	Bear Lake	Nutrients
Chautauqua	Chadakoin River and tribs	Nutrients
Chautauqua	Chautauqua Lake, North	Nutrients
Chautauqua	Chautauqua Lake, South	Nutrients
Chautauqua	Findley Lake	Nutrients
Chautauqua	Hulburt/Clymer Pond	Nutrients
Clinton	Great Chazy River, Lower, Main Stem	Silt/Sediment
Clinton	Lake Champlain, Main Lake, Middle	Nutrients
Clinton	Lake Champlain, Main Lake, North	Nutrients
Columbia	Kinderhook Lake	Nutrients
Columbia	Robinson Pond	Nutrients
Cortland	Dean Pond	Nutrients

303(d) Segments Impaired by Construction Related Pollutant(s)

Dutchess	Fall Kill and tribs	Nutrients
Dutchess	Hillside Lake	Nutrients
Dutchess	Wappingers Lake	Nutrients
Dutchess	Wappingers Lake	Silt/Sediment
Erie	Beeman Creek and tribs	Nutrients
Erie	Ellicott Creek, Lower, and tribs	Silt/Sediment
Erie	Ellicott Creek, Lower, and tribs	Nutrients
Erie	Green Lake	Nutrients
Erie	Little Sister Creek, Lower, and tribs	Nutrients
Erie	Murder Creek, Lower, and tribs	Nutrients
Erie	Rush Creek and tribs	Nutrients
Erie	Scajaquada Creek, Lower, and tribs	Nutrients
Erie	Scajaquada Creek, Middle, and tribs	Nutrients
Erie	Scajaquada Creek, Upper, and tribs	Nutrients
Erie	South Branch Smoke Cr, Lower, and tribs	Silt/Sediment
Erie	South Branch Smoke Cr, Lower, and tribs	Nutrients
Essex	Lake Champlain, Main Lake, South	Nutrients
Essex	Lake Champlain, South Lake	Nutrients
Essex	Willsboro Bay	Nutrients
Genesee	Bigelow Creek and tribs	Nutrients
Genesee	Black Creek, Middle, and minor tribs	Nutrients
Genesee	Black Creek, Upper, and minor tribs	Nutrients
Genesee	Bowen Brook and tribs	Nutrients
Genesee	LeRoy Reservoir	Nutrients
Genesee	Oak Orchard Cr, Upper, and tribs	Nutrients
Genesee	Tonawanda Creek, Middle, Main Stem	Nutrients
Greene	Schoharie Reservoir	Silt/Sediment
Greene	Sleepy Hollow Lake	Silt/Sediment
Herkimer	Steele Creek tribs	Silt/Sediment
Herkimer	Steele Creek tribs	Nutrients
Jefferson	Moon Lake	Nutrients
Kings	Hendrix Creek	Nutrients
Kings	Prospect Park Lake	Nutrients
Lewis	Mill Creek/South Branch, and tribs	Nutrients
Livingston	Christie Creek and tribs	Nutrients
Livingston	Conesus Lake	Nutrients
Livingston	Mill Creek and minor tribs	Silt/Sediment
Monroe	Black Creek, Lower, and minor tribs	Nutrients
Monroe	Buck Pond	Nutrients
Monroe	Cranberry Pond	Nutrients

303(d) Segments Impaired by Construction Related Pollutant(s)

Monroe	Lake Ontario Shoreline, Western	Nutrients
Monroe	Long Pond	Nutrients
Monroe	Mill Creek and tribs	Nutrients
Monroe	Mill Creek/Blue Pond Outlet and tribs	Nutrients
Monroe	Minor Tribs to Irondequoit Bay	Nutrients
Monroe	Rochester Embayment - East	Nutrients
Monroe	Rochester Embayment - West	Nutrients
Monroe	Shipbuilders Creek and tribs	Nutrients
Monroe	Thomas Creek/White Brook and tribs	Nutrients
Nassau	Beaver Lake	Nutrients
Nassau	Camaans Pond	Nutrients
Nassau	East Meadow Brook, Upper, and tribs	Silt/Sediment
Nassau	East Rockaway Channel	Nutrients
Nassau	Grant Park Pond	Nutrients
Nassau	Hempstead Bay	Nutrients
Nassau	Hempstead Lake	Nutrients
Nassau	Hewlett Bay	Nutrients
Nassau	Hog Island Channel	Nutrients
Nassau	Long Island Sound, Nassau County Waters	Nutrients
Nassau	Massapequa Creek and tribs	Nutrients
Nassau	Milburn/Parsonage Creeks, Upp, and tribs	Nutrients
Nassau	Reynolds Channel, west	Nutrients
Nassau	Tidal Tribs to Hempstead Bay	Nutrients
Nassau	Tribs (fresh) to East Bay	Nutrients
Nassau	Tribs (fresh) to East Bay	Silt/Sediment
Nassau	Tribs to Smith/Halls Ponds	Nutrients
Nassau	Woodmere Channel	Nutrients
New York	Harlem Meer	Nutrients
New York	The Lake in Central Park	Nutrients
Niagara	Bergholtz Creek and tribs	Nutrients
Niagara	Hyde Park Lake	Nutrients
Niagara	Lake Ontario Shoreline, Western	Nutrients
Niagara	Lake Ontario Shoreline, Western	Nutrients
Oneida	Ballou, Nail Creeks and tribs	Nutrients
Onondaga	Harbor Brook, Lower, and tribs	Nutrients
Onondaga	Ley Creek and tribs	Nutrients
Onondaga	Minor Tribs to Onondaga Lake	Nutrients
Onondaga	Ninemile Creek, Lower, and tribs	Nutrients
Onondaga	Onondaga Creek, Lower, and tribs	Nutrients
Onondaga	Onondaga Creek, Middle, and tribs	Nutrients

303(d) Segments Impaired by Construction Related Pollutant(s)

Onondaga	Onondaga Lake, northern end	Nutrients
Onondaga	Onondaga Lake, southern end	Nutrients
Ontario	Great Brook and minor tribs	Silt/Sediment
Ontario	Great Brook and minor tribs	Nutrients
Ontario	Hemlock Lake Outlet and minor tribs	Nutrients
Ontario	Honeoye Lake	Nutrients
Orange	Greenwood Lake	Nutrients
Orange	Monhagen Brook and tribs	Nutrients
Orange	Orange Lake	Nutrients
Orleans	Lake Ontario Shoreline, Western	Nutrients
Orleans	Lake Ontario Shoreline, Western	Nutrients
Oswego	Lake Neatahwanta	Nutrients
Oswego	Pleasant Lake	Nutrients
Putnam	Bog Brook Reservoir	Nutrients
Putnam	Boyd Corners Reservoir	Nutrients
Putnam	Croton Falls Reservoir	Nutrients
Putnam	Diverting Reservoir	Nutrients
Putnam	East Branch Reservoir	Nutrients
Putnam	Lake Carmel	Nutrients
Putnam	Middle Branch Reservoir	Nutrients
Putnam	Oscawana Lake	Nutrients
Putnam	Palmer Lake	Nutrients
Putnam	West Branch Reservoir	Nutrients
Queens	Bergen Basin	Nutrients
Queens	Flushing Creek/Bay	Nutrients
Queens	Jamaica Bay, Eastern, and tribs (Queens)	Nutrients
Queens	Kissena Lake	Nutrients
Queens	Meadow Lake	Nutrients
Queens	Willow Lake	Nutrients
Rensselaer	Nassau Lake	Nutrients
Rensselaer	Snyders Lake	Nutrients
Richmond	Grasmere Lake/Bradys Pond	Nutrients
Rockland	Congers Lake, Swartout Lake	Nutrients
Rockland	Rockland Lake	Nutrients
Saratoga	Ballston Lake	Nutrients
Saratoga	Dwaas Kill and tribs	Silt/Sediment
Saratoga	Dwaas Kill and tribs	Nutrients
Saratoga	Lake Lonely	Nutrients
Saratoga	Round Lake	Nutrients
Saratoga	Tribs to Lake Lonely	Nutrients

303(d) Segments Impaired by Construction Related Pollutant(s)

Schenectady	Collins Lake	Nutrients
Schenectady	Duane Lake	Nutrients
Schenectady	Mariaville Lake	Nutrients
Schoharie	Engleville Pond	Nutrients
Schoharie	Summit Lake	Nutrients
Seneca	Reeder Creek and tribs	Nutrients
St.Lawrence	Black Lake Outlet/Black Lake	Nutrients
St.Lawrence	Fish Creek and minor tribs	Nutrients
Steuben	Smith Pond	Nutrients
Suffolk	Agawam Lake	Nutrients
Suffolk	Big/Little Fresh Ponds	Nutrients
Suffolk	Canaan Lake	Silt/Sediment
Suffolk	Canaan Lake	Nutrients
Suffolk	Flanders Bay, West/Lower Sawmill Creek	Nutrients
Suffolk	Fresh Pond	Nutrients
Suffolk	Great South Bay, East	Nutrients
Suffolk	Great South Bay, Middle	Nutrients
Suffolk	Great South Bay, West	Nutrients
Suffolk	Lake Ronkonkoma	Nutrients
Suffolk	Long Island Sound, Suffolk County, West	Nutrients
Suffolk	Mattituck (Marratooka) Pond	Nutrients
Suffolk	Meetinghouse/Terrys Creeks and tribs	Nutrients
Suffolk	Mill and Seven Ponds	Nutrients
Suffolk	Millers Pond	Nutrients
Suffolk	Moriches Bay, East	Nutrients
Suffolk	Moriches Bay, West	Nutrients
Suffolk	Peconic River, Lower, and tidal tribs	Nutrients
Suffolk	Quantuck Bay	Nutrients
Suffolk	Shinnecock Bay and Inlet	Nutrients
Suffolk	Tidal tribs to West Moriches Bay	Nutrients
Sullivan	Bodine, Montgomery Lakes	Nutrients
Sullivan	Davies Lake	Nutrients
Sullivan	Evens Lake	Nutrients
Sullivan	Pleasure Lake	Nutrients
Tompkins	Cayuga Lake, Southern End	Nutrients
Tompkins	Cayuga Lake, Southern End	Silt/Sediment
Tompkins	Owasco Inlet, Upper, and tribs	Nutrients
Ulster	Ashokan Reservoir	Silt/Sediment
Ulster	Esopus Creek, Upper, and minor tribs	Silt/Sediment
Warren	Hague Brook and tribs	Silt/Sediment

303(d) Segments Impaired by Construction Related Pollutant(s)

Warren	Huddle/Finkle Brooks and tribs	Silt/Sediment
Warren	Indian Brook and tribs	Silt/Sediment
Warren	Lake George	Silt/Sediment
Warren	Tribs to L.George, Village of L George	Silt/Sediment
Washington	Cossayuna Lake	Nutrients
Washington	Lake Champlain, South Bay	Nutrients
Washington	Tribs to L.George, East Shore	Silt/Sediment
Washington	Wood Cr/Champlain Canal and minor tribs	Nutrients
Wayne	Port Bay	Nutrients
Westchester	Amawalk Reservoir	Nutrients
Westchester	Blind Brook, Upper, and tribs	Silt/Sediment
Westchester	Cross River Reservoir	Nutrients
Westchester	Lake Katonah	Nutrients
Westchester	Lake Lincolndale	Nutrients
Westchester	Lake Meahagh	Nutrients
Westchester	Lake Mohegan	Nutrients
Westchester	Lake Shenorock	Nutrients
Westchester	Long Island Sound, Westchester (East)	Nutrients
Westchester	Mamaroneck River, Lower	Silt/Sediment
Westchester	Mamaroneck River, Upper, and minor tribs	Silt/Sediment
Westchester	Muscoot/Upper New Croton Reservoir	Nutrients
Westchester	New Croton Reservoir	Nutrients
Westchester	Peach Lake	Nutrients
Westchester	Reservoir No.1 (Lake Isle)	Nutrients
Westchester	Saw Mill River, Lower, and tribs	Nutrients
Westchester	Saw Mill River, Middle, and tribs	Nutrients
Westchester	Sheldrake River and tribs	Silt/Sediment
Westchester	Sheldrake River and tribs	Nutrients
Westchester	Silver Lake	Nutrients
Westchester	Teatown Lake	Nutrients
Westchester	Titicus Reservoir	Nutrients
Westchester	Truesdale Lake	Nutrients
Westchester	Wallace Pond	Nutrients
Wyoming	Java Lake	Nutrients
Wyoming	Silver Lake	Nutrients

APPENDIX F – List of NYS DEC Regional Offices

<u>Region</u>	<u>COVERING THE FOLLOWING COUNTIES:</u>	<u>DIVISION OF ENVIRONMENTAL PERMITS (DEP) PERMIT ADMINISTRATORS</u>	<u>DIVISION OF WATER (DOW) WATER (SPDES) PROGRAM</u>
1	NASSAU AND SUFFOLK	50 CIRCLE ROAD STONY BROOK, NY 11790 TEL. (631) 444-0365	50 CIRCLE ROAD STONY BROOK, NY 11790-3409 TEL. (631) 444-0405
2	BRONX, KINGS, NEW YORK, QUEENS AND RICHMOND	1 HUNTERS POINT PLAZA, 47-40 21ST ST. LONG ISLAND CITY, NY 11101-5407 TEL. (718) 482-4997	1 HUNTERS POINT PLAZA, 47-40 21ST ST. LONG ISLAND CITY, NY 11101-5407 TEL. (718) 482-4933
3	DUTCHESS, ORANGE, PUTNAM, ROCKLAND, SULLIVAN, ULSTER AND WESTCHESTER	21 SOUTH PUTT CORNERS ROAD NEW PALTZ, NY 12561-1696 TEL. (845) 256-3059	100 HILLSIDE AVENUE, SUITE 1W WHITE PLAINS, NY 10603 TEL. (914) 428 - 2505
4	ALBANY, COLUMBIA, DELAWARE, GREENE, MONTGOMERY, OTSEGO, RENSSELAER, SCHENECTADY AND SCHOHARIE	1150 NORTH WESTCOTT ROAD SCHENECTADY, NY 12306-2014 TEL. (518) 357-2069	1130 NORTH WESTCOTT ROAD SCHENECTADY, NY 12306-2014 TEL. (518) 357-2045
5	CLINTON, ESSEX, FRANKLIN, FULTON, HAMILTON, SARATOGA, WARREN AND WASHINGTON	1115 STATE ROUTE 86, Po Box 296 RAY BROOK, NY 12977-0296 TEL. (518) 897-1234	232 GOLF COURSE ROAD WARRENSBURG, NY 12885-1172 TEL. (518) 623-1200
6	HERKIMER, JEFFERSON, LEWIS, ONEIDA AND ST. LAWRENCE	STATE OFFICE BUILDING 317 WASHINGTON STREET WATERTOWN, NY 13601-3787 TEL. (315) 785-2245	STATE OFFICE BUILDING 207 GENESEE STREET UTICA, NY 13501-2885 TEL. (315) 793-2554
7	BROOME, CAYUGA, CHENANGO, CORTLAND, MADISON, ONONDAGA, OSWEGO, TIOGA AND TOMPKINS	615 ERIE BLVD. WEST SYRACUSE, NY 13204-2400 TEL. (315) 426-7438	615 ERIE BLVD. WEST SYRACUSE, NY 13204-2400 TEL. (315) 426-7500
8	CHEMUNG, GENESEE, LIVINGSTON, MONROE, ONTARIO, ORLEANS, SCHUYLER, SENECA, STEUBEN, WAYNE AND YATES	6274 EAST AVON-LIMA ROADAVON, NY 14414-9519 TEL. (585) 226-2466	6274 EAST AVON-LIMA RD. AVON, NY 14414-9519 TEL. (585) 226-2466
9	ALLEGANY, CATTARAUGUS, CHAUTAUQUA, ERIE, NIAGARA AND WYOMING	270 MICHIGAN AVENUE BUFFALO, NY 14203-2999 TEL. (716) 851-7165	270 MICHIGAN AVENUE BUFFALO, NY 14203-2999 TEL. (716) 851-7070

ATTACHMENT NO. 2

COMPLETED NOTICE OF INTENT



CITY OF ALBANY
 DEPARTMENT OF WATER & WATER SUPPLY
 10 NORTH ENTERPRISE DRIVE
 ALBANY, NEW YORK 12204
 TELEPHONE (518) 434-5300
 FAX (518) 434-5332

KATHY M. SHEEHAN
 MAYOR

JOSEPH E. COFFEY, JR.
 COMMISSIONER

AWD

(for Department of Water use only)

NOTICE OF INTENT

Stormwater Discharges Associated With Construction Activities Under Rezone Albany

All sections must be completed unless otherwise noted. Failure to complete all items may result in this form being returned to you, thereby delaying your coverage under this Permit. Applicants must read and understand the conditions of the permit and prepare a Stormwater Pollution Prevention Plan prior to submitting this NOI. Applicants are responsible for identifying and obtaining other DEC permits that may be required.

-IMPORTANT-

RETURN THIS FORM TO THE ADDRESS ABOVE
OWNER/OPERATOR MUST SIGN FORM

Owner/Operator Information

Owner/Operator (Company Name/Private Owner Name/Municipality Name)

25 Delaware, LLC

Owner/Operator Contact Person Last Name (NOT

Linton

Owner/Operator Contact Person First

Jennifer

Owner/Operator Mailing Address

1000 University Avenue, Suite 500

City

Rochester

State

NY

Zip

14607

-

Phone (Owner/Operator)

5585 - 324 - 0560

Fax (Owner/Operator)

- -

Email (Owner/Operator)

jlinton@coniferllc.com

FED TAX ID

-

(not required for individuals)

Project Site Information

Project/Site Name

25 Delaware Avenue Apartments

Street Address (NOT P.O. BOX)

25 Delaware Avenue

Side of Street

North South East West

City/Town/Village (THAT ISSUES BUILDING PERMIT)

Albany

State

N Y

Zip

12209

-

County

Albany

Name of Nearest Cross Street

Myrtle Avenue

Distance to Nearest Cross Street (Feet)

0

Project In Relation to Cross Street

North South East West

Tax Map Numbers

Section-Block-Parcel

Tax Map Numbers

X

1. Provide the Geographic Coordinates for the project site in NYTM Units. To do this you must go to the NYSDEC Stormwater Interactive Map on the DEC website at:

www.dec.ny.gov/imsmaps/stormwater/viewer.htm

Zoom into your Project Location such that you can accurately click on the centroid of your site. Once you have located your project site, go to the tool boxes on the top and choose "i" (identify). Then click on the center of your site and a new window containing the X, Y coordinates in UTM will pop up. Transcribe these coordinates into the boxes below. For problems with the interactive map use the help function.

X Coordinates (Easting)

42.65073

Y Coordinates (Northing)

-73.76886

2. What is the nature of this construction project?

- New Construction
- Redevelopment with increase in impervious area
- Redevelopment with no increase in impervious area

3. Select the predominant land use for both pre and post development conditions.

SELECT ONLY ONE CHOICE FOR EACH

Pre-Development Existing Land Use

- FOREST
- PASTURE/OPEN LAND
- CULTIVATED LAND
- SINGLE FAMILY HOME
- SINGLE FAMILY SUBDIVISION
- TOWN HOME RESIDENTIAL
- MULTIFAMILY RESIDENTIAL
- INSTITUTIONAL/SCHOOL
- INDUSTRIAL
- COMMERCIAL
- ROAD/HIGHWAY
- RECREATIONAL/SPORTS FIELD

- BIKE PATH/TRAIL
- LINEAR UTILITY
- PARKING LOT
- OTHER

Vacant Building

Post-Development Future Land Use

- SINGLE FAMILY HOME
- SINGLE FAMILY SUBDIVISION
- TOWN HOME RESIDENTIAL
- MULTIFAMILY RESIDENTIAL
- INSTITUTIONAL/SCHOOL
- INDUSTRIAL
- COMMERCIAL
- MUNICIPAL
- ROAD/HIGHWAY
- RECREATIONAL/SPORTS FIELD
- BIKE PATH/TRAIL

- LINEAR UTILITY (water, sewer, gas, etc.)
- PARKING LOT
- CLEARING/GRADING ONLY
- DEMOLITION, NO REDEVELOPMENT
- WELL DRILLING ACTIVITY *(Oil, Gas, etc.)
- OTHER

Number of Lots

* Note : for gas well drilling, non-high volume hydraulic fractured wells only

4. In accordance with the larger common plan of development or sale, enter the total project site area; the total area to be disturbed; existing impervious area to be disturbed (for redevelopment activities); and the future impervious area constructed within the existing impervious area to be disturbed (for redevelopment disturbed area). (Round to the nearest tenth of an acre).

Total Site Area	Total Area To Be Disturbed	Existing Impervious Area To Be Disturbed	Future Impervious Area Within Disturbed Area
<input type="text" value="0.78"/>	<input type="text" value="0.70"/>	<input type="text" value="0.27"/>	<input type="text" value="0.57"/>

5. Do you plan to disturb more than 5 acres of soil at any one time? Yes No

6. Indicate the percentage of each Hydrologic Soil Group (HSG) at the site.

<input type="text" value="0"/> %	<input type="text" value="0"/> %	<input type="text" value="100"/> %	<input type="text" value="0"/> %
----------------------------------	----------------------------------	------------------------------------	----------------------------------

7. Is this a phased project? Yes No

8. Enter the planned start and end dates of the disturbance activities. Start Date: / / - End Date: / /

9. Identify the nearest surface waterbody(ies) to which construction site runoff will discharge.

Name
Hudson River

9a. Type of waterbody identified in Question 9?

- Wetland / State Jurisdiction On Site (Answer 9b)
- Wetland / State Jurisdiction Off Site
- Wetland / Federal Jurisdiction On Site (Answer 9b)
- Wetland / Federal Jurisdiction Off Site
- Stream / Creek On Site
- Stream / Creek Off Site
- River On Site
- River Off Site
- Lake On Site
- Lake Off Site
- Other Type On Site
- Other Type Off Site

9b. How was the wetland identified?

- Regulatory Map
- Delineated by Consultant
- Delineated by Army Corps of Engineers
- Other (identify)

10. Has the surface waterbody(ies) in question 9 been identified as a 303(d) segment in Appendix E of GP-0-15-002? Yes No

11. Is this project located in one of the Watersheds identified in Appendix C of GP-0-15-002? Yes No

12. Is the project located in one of the watershed areas associated with AA and AA-S classified waters? Yes No
If no, skip question 13.

13. Does this construction activity disturb land with no existing impervious cover and where the Soil Slope Phase is identified as an E or F on the USDA Soil Survey? Yes No
If Yes, what is the acreage to be disturbed?

 .

14. Will the project disturb soils within a State regulated wetland or the protected 100 foot adjacent area? Yes No

15. Does the site runoff enter a separate storm sewer system (including roadside drains, swales, ditches, culverts, etc)? Yes No Unknown

16. What is the name of the municipality/entity that owns the separate storm sewer system?

Albany Water Board

17. Does any runoff from the site enter a sewer classified as a Combined Sewer? Yes No Unknown

18. Will future use of this site be an agricultural property as defined by the NYS Agriculture and Markets Law? Yes No

19. Is this property owned by a state authority, state agency, federal government or local government? Yes No

20. Is this a remediation project being done under a Department approved work plan? (i.e. CERCLA, RCRA, Voluntary Cleanup Agreement, etc.) Yes No

21. Has the required Erosion and Sediment Control component of the SWPPP been developed in conformance with the current NYS Standards and Specifications for Erosion and Sediment Control (aka Blue Book)? Yes No

22. Does this construction activity require the development of a SWPPP that includes the post-construction stormwater management practice component (i.e. Runoff Reduction, Water Quality and Quantity Control practices/techniques)? Yes No
If No, skip questions 23 and 27-39.

23. Has the post-construction stormwater management practice component of the SWPPP been developed in conformance with the current NYS Stormwater Management Design Manual? Yes No

24. The Stormwater Pollution Prevention Plan (SWPPP) was prepared by:

- Professional Engineer (P.E.)
- Soil and Water Conservation District (SWCD)
- Registered Landscape Architect (R.L.A.)
- Certified Professional in Erosion and Sediment Control (CPESC)
- Owner/Operator
- Other

SWPPP Preparer

Contact Name (Last, Space, First)

Mailing Address

City

State

 -

Phone

 -

Fax

 - -

Email

SWPPP Preparer Certification

I hereby certify that the Stormwater Pollution Prevention Plan (SWPPP) for this project has been prepared in accordance with the terms and conditions of Rezone Albany. Furthermore, I understand that certifying false, incorrect or inaccurate information is a violation of this permit and the laws of the State of New York and could subject me to criminal, civil and/or administrative proceedings.

First Name

MI

Last Name

Signature

Date

04/13/2020

25. Has a construction sequence schedule for the planned management practices been prepared?

Yes No

26. Select all of the erosion and sediment control practices that will be employed on this project site.

Temporary Structural

- Check Dams
- Construction Road Stabilization
- Dust Control
- Earth Dike
- Level Spreader
- Perimeter Dike/Swale
- Pipe Slope Drain
- Portable Sediment Tank
- Rock Dam
- Sediment Basin
- Sediment Traps
- Silt Fence
- Stabilized Construction Entrance
- Storm Drain Inlet Protection
- Straw/Hay Bale Dike
- Temporary Access Waterway Crossing
- Temporary Stormdrain Diversion
- Temporary Swale
- Turbidity Curtain
- Water Bars

Biotechnical

- Brush Matting
- Wattling

Vegetative Measures

- Brush Matting
- Dune Stabilization
- Grassed Waterway
- Mulching
- Protecting Vegetation
- Recreation Area Improvement
- Seeding
- Sodding
- Straw/Hay Bale Dike
- Streambank Protection
- Temporary Swale
- Topsoiling
- Vegetating Waterways

Permanent Structural

- Debris Basin
- Diversion
- Grade Stabilization Structure
- Land Grading
- Lined Waterway (Rock)
- Paved Channel (Concrete)
- Paved Flume
- Retaining Wall
- Riprap Slope Protection
- Rock Outlet Protection
- Streambank Protection

Other

Post Construction Stormwater Management Practice (SMP) Requirements

Important: Completion of Questions 27-39 is not required if response to Question 22 is No.

27. Identify all site planning practices that were used to prepare the final site plan/layout for the project.

- Preservation of Undisturbed Areas
- Preservations of Buffers
- Reduction of Clearing & Grading
- Locating Development in Less Sensitive Areas
- Roadway Reduction
- Sidewalk Reduction
- Driveway Reduction
- Cul-de-sac Reduction
- Building Footprint Reduction
- Parking Reduction

27a. Indicate which of the following soil restoration criteria was used to address the requirements in Section 5.1.6 ("Soil Restoration") of the Design Manual (2010 version).

- All disturbed areas will be restored in accordance with the Soil Restoration requirements in Table 5.3 of the Design Manual (see page 5-22).
- Compacted areas were considered as impervious cover when calculating the WQv Required, and the compacted areas were assigned a post construction Hydrologic Soil Group (HSG) designation that is one level less permeable than existing conditions for the hydrology analysis.

28. Provide the total Water Quality Volume (WQv) required for this project (based on final site plan/layout).

Total WQv Required

. acre-feet

29. Identify the RR techniques (Area Reduction), RR techniques (Volume Reduction) and Standard SMPs with RRv Capacity in Table 1 (See Page 9) that were used to reduce the Total WQv Required (#28).

Also, provide in Table 1 the total impervious area that contributes runoff to each technique/practice selected. For the Area Reduction Techniques, provide the total contributing area (includes pervious area) and, if applicable, the total impervious area that contributes runoff to the technique/practice.

Note: Redevelopment projects shall use Table 1 and 2 to identify the SMPs used to treat and/or reduce the WQv required. If runoff reduction techniques will not be used to reduce the required WQv, skip to question 33a after identifying the SMPs

Table 1 - Runoff Reduction (RR) Techniques and Standard Stormwater Management Practices (SMPs)

RR Techniques (Area Reduction)	Total Contributing Area (acres)		and/or	Total Contributing Impervious Area (acres)	
<input type="radio"/> Conservation of Natural Areas (RR-1).....	<input type="text"/>	<input type="text"/>		<input type="text"/>	<input type="text"/>
<input type="radio"/> Sheetflow to Riparian Buffers/Filters Strips (RR-2).....	<input type="text"/>	<input type="text"/>		<input type="text"/>	<input type="text"/>
<input type="radio"/> Tree Planting/Tree Pit (RR-3).....	<input type="text"/>	<input type="text"/>		<input type="text"/>	<input type="text"/>
<input checked="" type="radio"/> Disconnection of Rooftop Runoff (RR-4).....	<input type="text"/>	<input type="text"/>		<input type="text"/>	<input type="text"/>
<u>RR Techniques (Area Reduction)</u>					
<input type="radio"/> Vegetated Swale (RR-5).....				<input type="text"/>	<input type="text"/>
<input type="radio"/> Rain Garden (RR-6).....				<input type="text"/>	<input type="text"/>
Stormwater Planter (RR-7).....				<input type="text"/>	<input type="text"/>
<input type="radio"/> Rain Barrel/Cistern (RR-8).....				<input type="text"/>	<input type="text"/>
<input type="radio"/> Porous Pavement (RR-9).....				<input type="text"/>	<input type="text"/>
<input type="radio"/> Green Roof (RR-10).....				<input type="text"/>	<input type="text"/>
<u>Standard SMPs with RRv Capacity</u>					
<input type="radio"/> Infiltration Trench (I-1).....				<input type="text"/>	<input type="text"/>
<input type="radio"/> Infiltration Basin (I-2).....				<input type="text"/>	<input type="text"/>
<input type="radio"/> Dry Well (I-3).....				<input type="text"/>	<input type="text"/>
<input type="radio"/> Underground Infiltration System (I-4).....				<input type="text"/>	<input type="text"/>
<input type="radio"/> Bioretention (F-5).....				<input type="text"/>	<input type="text"/>
<input type="radio"/> Dry Swale (O-1).....				<input type="text"/>	<input type="text"/>
<u>Standard SMPs</u>					
<input type="radio"/> Micropool Extended Detention (P-1).....				<input type="text"/>	<input type="text"/>
<input type="radio"/> Wet Pond (P-2).....				<input type="text"/>	<input type="text"/>
<input type="radio"/> Wet Extended Detention (P-3).....				<input type="text"/>	<input type="text"/>
<input type="radio"/> Multiple Pond System (P-4).....				<input type="text"/>	<input type="text"/>
<input type="radio"/> Pocket Pond (P-5).....				<input type="text"/>	<input type="text"/>
<input type="radio"/> Surface Sand Filter (F-1).....				<input type="text"/>	<input type="text"/>
<input type="radio"/> Underground Sand Filter (F-2).....				<input type="text"/>	<input type="text"/>
<input type="radio"/> Perimeter Sand Filter (F-3).....				<input type="text"/>	<input type="text"/>
<input type="radio"/> Organic Filter (F-4).....				<input type="text"/>	<input type="text"/>
<input type="radio"/> Shallow Wetland (W-1).....				<input type="text"/>	<input type="text"/>
<input type="radio"/> Extended Detention Wetland (W-2).....				<input type="text"/>	<input type="text"/>
<input type="radio"/> Pond/Wetland System (W-3).....				<input type="text"/>	<input type="text"/>
<input type="radio"/> Pocket Wetland (W-4).....				<input type="text"/>	<input type="text"/>
<input type="radio"/> Wet Swale (O-2).....				<input type="text"/>	<input type="text"/>

Table 2 - Alternative SMPs (Do Not Include Practices Being Used For Pretreatment Only)

<u>Alternative SMP</u>	<u>Total Contributing Impervious Area (acres)</u>	
<input checked="" type="checkbox"/> Hydrodynamic.....		
Wet Vault.....		
Media Filter.....		
Other		

Provide the name and manufacturer of the Alternative SMPs (i.e. proprietary practice (s)) being used for WQv treatment.

Name Downstream Defender

Manufacturer Hydro International

Note: Redevelopment projects which do not use RR techniques, shall use questions 28, 29, 33 and 33a to provide SMPs, used, total WQv required and total WQv provided for the project.

30. Indicate the Total RRv provided by the RR techniques (Area/Volume Reduction) and Standard SMPs with RRv capacity identified in question 29.

Total RRv provided

. 0.02 **acre-feet**

31. Is the Total RRv provided (#30) greater than or equal to the total WQv required (#28).

Yes No

**If Yes, go to question 36.
If No, go to question 32.**

32. Provide the Minimum RRv required based on HSG.
[Minimum RRv Required = (P)(0.95)(Ai)/12, Ai=(S)(Aic)]

Minimum RRv Required

. **acre-feet**

- 32a. Is the Total RRv provided (#30) greater than or equal to the Minimum RRv Required (#32)?

Yes No

If Yes, go to question 33.

Note : Use the space provided in question #39 to summarize the specific site limitations and justification for not reducing 100% of WQv required (#28). A detailed evaluation of the specific site limitations and justification for not reducing 100% of the WQv required (#28) must also be included in the SWPPP.

If No, sizing criteria has not been met, so NOI can not be processed. SWPPP preparer must modify design to meet sizing criteria.

33. Identify the Standard SMP's in Table 1 and, if applicable, the Alternative SMPs in Table 2 that were used to treat the remaining total WQv (=Total WQv Required in 28 - Total RRv Provided in 30).

Also, provide in Table 1 and Table 2 the total impervious area that contributes runoff to each practice selected.

Note: Use Table 1 and Table 2 to identify the SMPs used on Redevelopment projects.

33a Indicate the Total WQv provided (i.e. WQv treated) by the SMPs identified in question #33 and Standard SMPs with RRv Capacity identified in Question #29.

WQv Provided
[] . 0.043 acre-feet

Note: For the Standard SMPs with RRv capacity, the WQv provided by each practice = the WQv calculated using the contributing drainage area to the practice - RRv provided by the practice. (See Table 3.5 in Design Manual)

34. Provide the sum of the Total RRv provided (#30) and the WQv provided (#33a). [] . [] acre-feet

35. Is the sum of the RRv provided (#30) and the WQv provided (#33a) greater than or equal to the total WQv required (#28)? Yes No

**If Yes, go to question 36.
If No, sizing criteria has not been met, so NOI can not be processed. SWPPP preparer must modify design to meet sizing criteria.**

36. Provide the total Channel Protection Storage Volume (CPv) required and provided or select waiver (36a), if applicable.

CPv Required CPv Provided
NA . [] acre-feet [] . [] acre-feet

36a. The need to provide channel protection has been waived because:

- Site discharges directly to tidal waters or a fifth order or larger stream.
- Reduction of the total CPv is achieved on site through runoff reduction techniques or infiltration systems.

37. Provide the Overbank Flood (Qp) and Extreme Flood (Qf) control criteria or select waiver (37a), if applicable.

Total Overbank Flood Control Criteria (Qp)

Pre-Development Post-Development
2.48 . [] CFS 1.59 . [] CFS

Total Extreme Flood Control Criteria (Qf)

Pre-Development Post-Development
5.04 . [] CFS 2.40 . [] CFS

- 37a. The need to meet the Qp and Qf criteria has been waived because:
- Site discharges directly to tidal waters or a fifth order or larger stream.
 - Downstream analysis reveals that the Qp and Qf controls are not required.

38. Has a long term Operation & Maintenance Plan for the post construction stormwater management practice (s) been developed? Yes No

If yes, identify the entity responsible for the long term Operation & Maintenance.

25 Delaware, LLC

39. Use this space to summarize the specific site limitations and justification for not reducing 100% of WQv required (#28). (See Question #32a). This space can also be used for other pertinent project information.

The site is a redevelopment site with limited capability to utilize infiltration methods.: As per the directions herein "Redevelopment projects which do not use RR techniques, shall use questions 28, 29, 33 and 33a to provide SMPs, used, total WQv required and total WQv provided for the project". Storage is provided to meet Overbank Flood Protection and Extreme Flood Protection. Treatment is provided through the use of an Alternative Method – Hydrodynamic Separator. A small amount of RRV (0.02 acre-feet) is provided through the use of a storm planter. A significant reduction takes place in storm water flow as required by USDO standards. The requirement that the controls on flow from the 100 year storm to discharge less (2.40 CFS) than the discharge from the 10 year storm in the undeveloped condition (2.48 CFS) results in a more restrictive storm water flows that under SPDES General Permit 0-020-002..

40. Identify other DEC permits, existing and new, that are required for this project/facility.

- Air Pollution Control
- Coastal Erosion
- Hazardous Waste
- Long Island Wells
- Mined Land Reclamation
- Solid Waste
- Navigable Waters Protection/Article 15
- Water Quality Certificate
- Dam Safety
- Water Supply
- Freshwater Wetlands/Article 24
- Tidal Wetlands
- Wild, Scenic and Recreational Rivers
- Stream Bed or Bank Protection / Article 15
- Endangered or Threatened Species(Incidental Take Permit)
- Individual SPDES
- SPDES Multi-Sector GP
- Other

None

41. Does this project require a US Army Corps of Engineers Wetland Permit? Yes No
If Yes, Indicate Size of Impact. .

42. Is this project subject to the requirements of a regulated, traditional land use control MS4? Yes No
(If No, skip question 43)

43. Has the "MS4 SWPPP Acceptance" form been signed by the principal executive officer or ranking elected official and submitted along with this NOI? Yes No

44. If this NOI is being submitted for the purpose of continuing or transferring coverage under a permit for stormwater runoff from construction activities, please indicate the former SPDES number assigned.

Owner/Operator Certification

I have read or been advised of the permit conditions and believe that I understand them. I also understand that, under the terms of this permit, there may be reporting requirements. I hereby certify that this document and the corresponding documents were prepared under my direction or supervision. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations. I further understand that coverage under the permit will be identified in the acknowledgment that I will receive as a result of submitting this NOI and can be as long as sixty (60) business days as provided for in the permit. I also understand that, by submitting this NOI, I am acknowledging that the SWPPP has been developed and will be implemented as the first element of construction, and agreeing to comply with all the terms and conditions of the permit for which this NOI is being submitted.

Print First Name

MI

Print Last Name

Owner/Operator Signature

Date

/ /

ATTACHMENT NO. 3

**NOTICE OF TERMINATION
(BLANK FOR FUTURE USE)**



CITY OF ALBANY
 DEPARTMENT OF WATER & WATER SUPPLY
 10 NORTH ENTERPRISE DRIVE
 ALBANY, NEW YORK 12204
 TELEPHONE (518) 434-5300
 FAX (518) 434-5332

KATHY M. SHEEHAN
 MAYOR

JOSEPH E. COFFEY, JR., P.E.
 COMMISSIONER

(NOTE: Submit Completed Form To Address Above)

NOTICE OF TERMINATION

Please indicate your permit identification number : AWD [redacted]

I. Owner or Operator Information:

1. Owner/Operator Name: 25 Delaware , LLC

2. Street Address: 25 Delaware Avenue

3. City/State/Zip: Albany, NY 12209

4. Contact Person: Michael Birkny, Project Director

5. Telephone: 585-324-0546

6. Contact Person E-Mail: mbirkby@coniferllc.com

II. Project Site Information:

7. Project/Site Name: 25 Delaware Avenue Apartments

8. Street Address: 25 Delaware Avenue

9. City/Zip: Albany, NY 12209

10. County: Albany

III. Reason for Termination:

11. All disturbed areas have achieved final stabilization in accordance with the permit and SWPPP.
 * **Date final stabilization completed** (month/year) [redacted]

12. Permit coverage has been transferred to new owner/operator. Indicate new owner/operator's permit identification number: AWD [redacted]
 (Note: Permit coverage can not be terminated by owner identified in I.1. above until new owner/operator obtains coverage under the general permit)

13. Other (Explain on Page 2)

IV. Final Site Information:

14. Did this construction activity require the development of a SWPPP that includes post construction stormwater management practices? yes no (If no, go to question 19.)

15. Have all post construction stormwater management practices included in the final SWPPP been constructed? yes no (If no, explain on Page 2)

16. Identify the entity responsible for long-term operation and maintenance of practice(s)?
 [redacted]

NOTICE OF TERMINATION

17. Has the entity responsible for longterm operation and maintenance been given a copy of the operation and maintenance plan required by the permit? yes no

18. Indicate the method used to ensure long term operation and maintenance of the post construction stormwater management practice(s):

- Post construction stormwater management practice(s) and any right-of-way(s) needed to maintain practice(s) have been deeded to the municipality.
- Executed maintenance agreement is in place with the municipality that will maintain the post construction stormwater management practice(s).
- Post construction stormwater management practices that are privately owned, a mechanism is in place that requires operation and maintenance of the practice(s) in accordance with the operation and maintenance plan, such as a deed covenant in the owner or operator's deed of record.
- For post construction stormwater management practices that are owned by a public or private institution (e.g. school, government agency or authority, or public utility; policy and procedures are in place that ensures operation and maintenance of the practice(s) in accordance with the operation and maintenance plan.

19. Total area of impervious surface (i.e. roof, pavement, concrete, gravel, etc.) constructed within the disturbance area? _____
(acres)

20. Is the project subject to the requirements of a regulated, traditional land use control MS4? yes no
(If Yes, complete section VI - "MS4 Acceptance" statement

V. Additional Information/Explanation:

(Use this section to answer questions 13. and 15., if applicable)

VI. MS4 Acceptance - MS4 Official (City of Albany Stormwater Program Manager) or Duly Authorized Representative: (Note: Not required when 12. is checked - transfer of coverage)

I have determined that it is acceptable for the owner or operator of the construction project identified in question 7 to submit the Notice of Termination at this time.

Printed Name: _____

Title/Position: _____

Signature: _____

Date: _____

NOTICE OF TERMINATION

VII. Qualified Inspector Certification - Final Stabilization:

I hereby certify that all disturbed areas have achieved final stabilization as defined in the current version of the permit, and that all temporary, structural erosion and sediment control measures have been removed. Furthermore, I understand that certifying false, incorrect or inaccurate information is a violation of the referenced permit and the laws of the State of New York and could subject me to criminal, civil and/or administrative proceedings.

Printed Name:

Title/Position:

Signature:

Date:

VIII. Qualified Inspector Certification - Post construction Stormwater Management Practice(s):

I hereby certify that all post-construction stormwater management practices have been constructed in conformance with the SWPPP. Furthermore, I understand that certifying false, incorrect or inaccurate information is a violation of the referenced permit and the laws of the State of New York and could subject me to criminal, civil and/or administrative proceedings.

Printed Name:

Title/Position:

Signature:

Date:

IX. Owner or Operator Certification:

I hereby certify that this document was prepared by me or under my direction or supervision. My determination, based upon my inquiry of the person(s) who managed the construction activity, or those persons directly responsible for gathering the information, is that the information provided in this document is true, accurate and complete. Furthermore, I understand that certifying false, incorrect or inaccurate information is a violation of the referenced permit and the laws of the State of New York and could subject me to criminal, civil and/or administrative proceedings.

Printed Name:

Title/Position:

Signature:

Date:

ATTACHMENT NO. 4

CERTIFICATION OF CONTRACTOR

Contractor/Subcontractor SWPPP Certification

NOTE: This SWPPP identifies for each measure identified in the SWPPP, the contractor(s) and subcontractor(s) that will implement the measure. All contractors and subcontractors identified in the SWPPP must sign a copy of the certification statement. All certifications must be included in the SWPPP. Additionally, new contractors and subcontractors need to similarly certify. All contractors and subcontractors identified in a SWPPP shall sign a copy of this certification statement before undertaking any construction activity at the site identified in the SWPPP:

I hereby certify that I understand and agree to comply with the terms and conditions of the SWPPP and agree to implement any corrective actions identified by the qualified inspector during a site inspection. I also understand that the owner or operator must comply with the terms and conditions of the New York State Pollutant Discharge Elimination System ("SPDES") general permit for stormwater discharges from construction activities and that it is unlawful for any person to cause or contribute to a violation of water quality standards. Furthermore, I understand that certifying false, incorrect or inaccurate information is a violation of the referenced permit and the laws of the State of New York and could subject me to criminal, civil and/or administrative proceedings.

SERVICES PROVIDED BY THIS CONTRACTOR/SUBCONTRACTOR:

(Contractor/Subcontractor must complete)

List all trades covered: _____

Signature

Name & Title (Print or Type)

Name of Entity Constituting Contractor/Subcontractor (Print or Type)

Address of Entity Constituting Contractor/Subcontractor (Print or Type)

Phone Number/Fax Number of Entity Constituting Contractor/Subcontractor (Print or Type)

Signatory Requirements – This SWPPP certification shall be signed as follows:

- a. For a corporation: by (1) a president, secretary, treasurer, or vice- president of the corporation in charge of a principal business function, or any other person authorized to and who performs similar policy or decision making functions for the corporation; or (2) the manager of one or more manufacturing, production or operating facilities employing more than 250 persons or having gross annual sales or expenditures exceeding \$25,000,000 (in second-quarter 1980 dollars) if authority to sign documents has been assigned or delegated to the manager in accordance with corporate procedures;
- b. For a partnership or sole proprietorship: by a general partner or the proprietor, respectively.

ATTACHMENT NO. 5

CERTIFICATION OF OWNER/DEVELOPER



Owner/Operator Certification Form

SPDES General Permit For Stormwater Discharges From Construction Activity (GP-0-15-002)

Project/Site Name: _____

eNOI Submission Number: _____

eNOI Submitted by: Owner/Operator SWPPP Preparer Other

Certification Statement - Owner/Operator

I have read or been advised of the permit conditions and believe that I understand them. I also understand that, under the terms of the permit, there may be reporting requirements. I hereby certify that this document and the corresponding documents were prepared under my direction or supervision. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations. I further understand that coverage under the general permit will be identified in the acknowledgment that I will receive as a result of submitting this NOI and can be as long as sixty (60) business days as provided for in the general permit. I also understand that, by submitting this NOI, I am acknowledging that the SWPPP has been developed and will be implemented as the first element of construction, and agreeing to comply with all the terms and conditions of the general permit for which this NOI is being submitted.

Owner/Operator First Name

M.I. Last Name

Signature

Date

**ATTACHMENT NO. 6
SAMPLE INSPECTION FORM
FOR USE
DURING CONSTRUCTION
UNTIL FILING OF NOTICE OF TERMINATION
(NOT)
UNDER SPDES GENERAL PERMIT
(GP# 0-20-001)**

SPDES GP-0-15-002
Part IV.C.4
Inspection Form
(Attach additional pages as required)

a. Date and time of inspection; _____

b. Name and title of person(s) performing inspection;

c. A description of the weather and soil conditions (e.g. dry, wet, saturated) at the time of the inspection;

d. A description of the condition of the runoff at all points of discharge from the construction site. This shall include identification of any discharges of sediment from the construction site. Include discharges from conveyance systems (i.e. pipes, culverts, ditches, etc.) and overland flow;

e. A description of the condition of all natural surface waterbodies located within, or immediately adjacent to, the property boundaries of the construction site which receive runoff from disturbed areas. This shall include identification of any discharges of sediment to the surface waterbody;

f. Identification of all erosion and sediment control practices and pollution prevention measures that need repair or maintenance;

g. Identification of all erosion and sediment control practices and pollution prevention measures that were not installed properly or are not functioning as designed and need to be reinstalled or replaced;

h. Description and sketch of areas with active soil disturbance activity, areas that have been disturbed but are inactive at the time of the inspection, and areas that have been stabilized (temporary and/or final) since the last inspection;

i. Current phase of construction of all post-construction stormwater management practices and identification of all construction that is not in conformance with the SWPPP and technical standards;

j. Corrective action(s) that must be taken to install, repair, replace or maintain erosion and sediment control practices and pollution prevention measures; and to correct deficiencies identified with the construction of the post-construction stormwater management practice(s);

k. Identification and status of all corrective actions that were required by previous inspection;

l. Digital photographs, with date stamp, that clearly show the condition of all practices that have been identified as needing corrective actions. The qualified inspector shall attach paper color copies of the digital photographs to the inspection report being maintained onsite within seven (7) calendar days of the date of the inspection. The qualified inspector shall also take digital photographs, with date stamp, that clearly show the condition of the practice(s) after the corrective action has been completed. The qualified inspector shall attach paper color copies of the digital photographs to the inspection report that documents the completion of the corrective action work within seven (7) calendar days of that inspection.

ATTACHMENT NO. 7

MS4 Acceptance



CITY OF ALBANY
DEPARTMENT OF WATER & WATER SUPPLY
10 NORTH ENTERPRISE DRIVE
ALBANY, NEW YORK 12204
TELEPHONE (518) 434-5300
FAX (518) 434-5332

KATHY M. SHEEHAN
MAYOR

JOSEPH E. COFFEY, JR., P.E.
COMMISSIONER

Stormwater Pollution Prevention Plan (SWPPP) Acceptance Form

for

Construction Activities Seeking Authorization Under Rezone Albany

*(NOTE: Attach Completed Form to Notice Of Intent and Submit to Address Above)

I. Project Owner/Operator Information

- | | |
|-------------------------|--------------------------------------------|
| 1. Owner/Operator Name: | 25 Delaware, LLC. |
| 2. Contact Person: | Michael Birkby, Project Director , Conifer |
| 3. Street Address: | 1000 University Avenue. Suite 500 |
| 4. City/State/Zip: | Rochester, NY 14607 |

II. Project Site Information

- | | |
|-----------------------|-------------------------------|
| 5. Project/Site Name: | 25 Delaware Avenue Apartments |
| 6. Street Address: | 25 Delaware Avenue |
| 7. City/State/Zip: | Albany, NY 12209 |

III. Stormwater Pollution Prevention Plan (SWPPP) Review and Acceptance Information

- | | |
|---------------------------------------------|---------------------|
| 8. SWPPP Reviewed by: | Neil O'Connor, P.E. |
| 9. Title/Position: | Engineer Supervisor |
| 10. Date Final SWPPP Reviewed and Accepted: | |

IV. Regulated MS4 Information

- | | |
|---------------------------------------------|---------------------------|
| 11. Name of MS4: | City of Albany |
| 12. MS4 SPDES Permit Identification Number: | AWD 464 |
| 13. Contact Person: | Peter Beck |
| 14. Street Address: | 10 North Enterprise Drive |
| 15. City/State/Zip: | Albany, NY 12204 |
| 16. Telephone Number: | 518-434-5300 |

MS4 SWPPP Acceptance Form - continued

V. Certification Statement - MS4 Official (City of Albany Stormwater Program Manager) or Duly Authorized Representative

I hereby certify that the final Stormwater Pollution Prevention Plan (SWPPP) for the construction project identified in question 5 has been reviewed and meets the substantive requirements in the SPDES Permit For Stormwater Discharges from Municipal Separate Storm Sewer Systems (MS4s).

Note: The MS4, through the acceptance of the SWPPP, assumes no responsibility for the accuracy and adequacy of the design included in the SWPPP. In addition, review and acceptance of the SWPPP by the MS4 does not relieve the owner/operator or their SWPPP preparer of responsibility or liability for errors or omissions in the plan.

Printed Name:

Title/Position:

Signature:


Date:

VI. Additional Information


MAP POCKET #1

MAP #C – 4

SITE PLAN

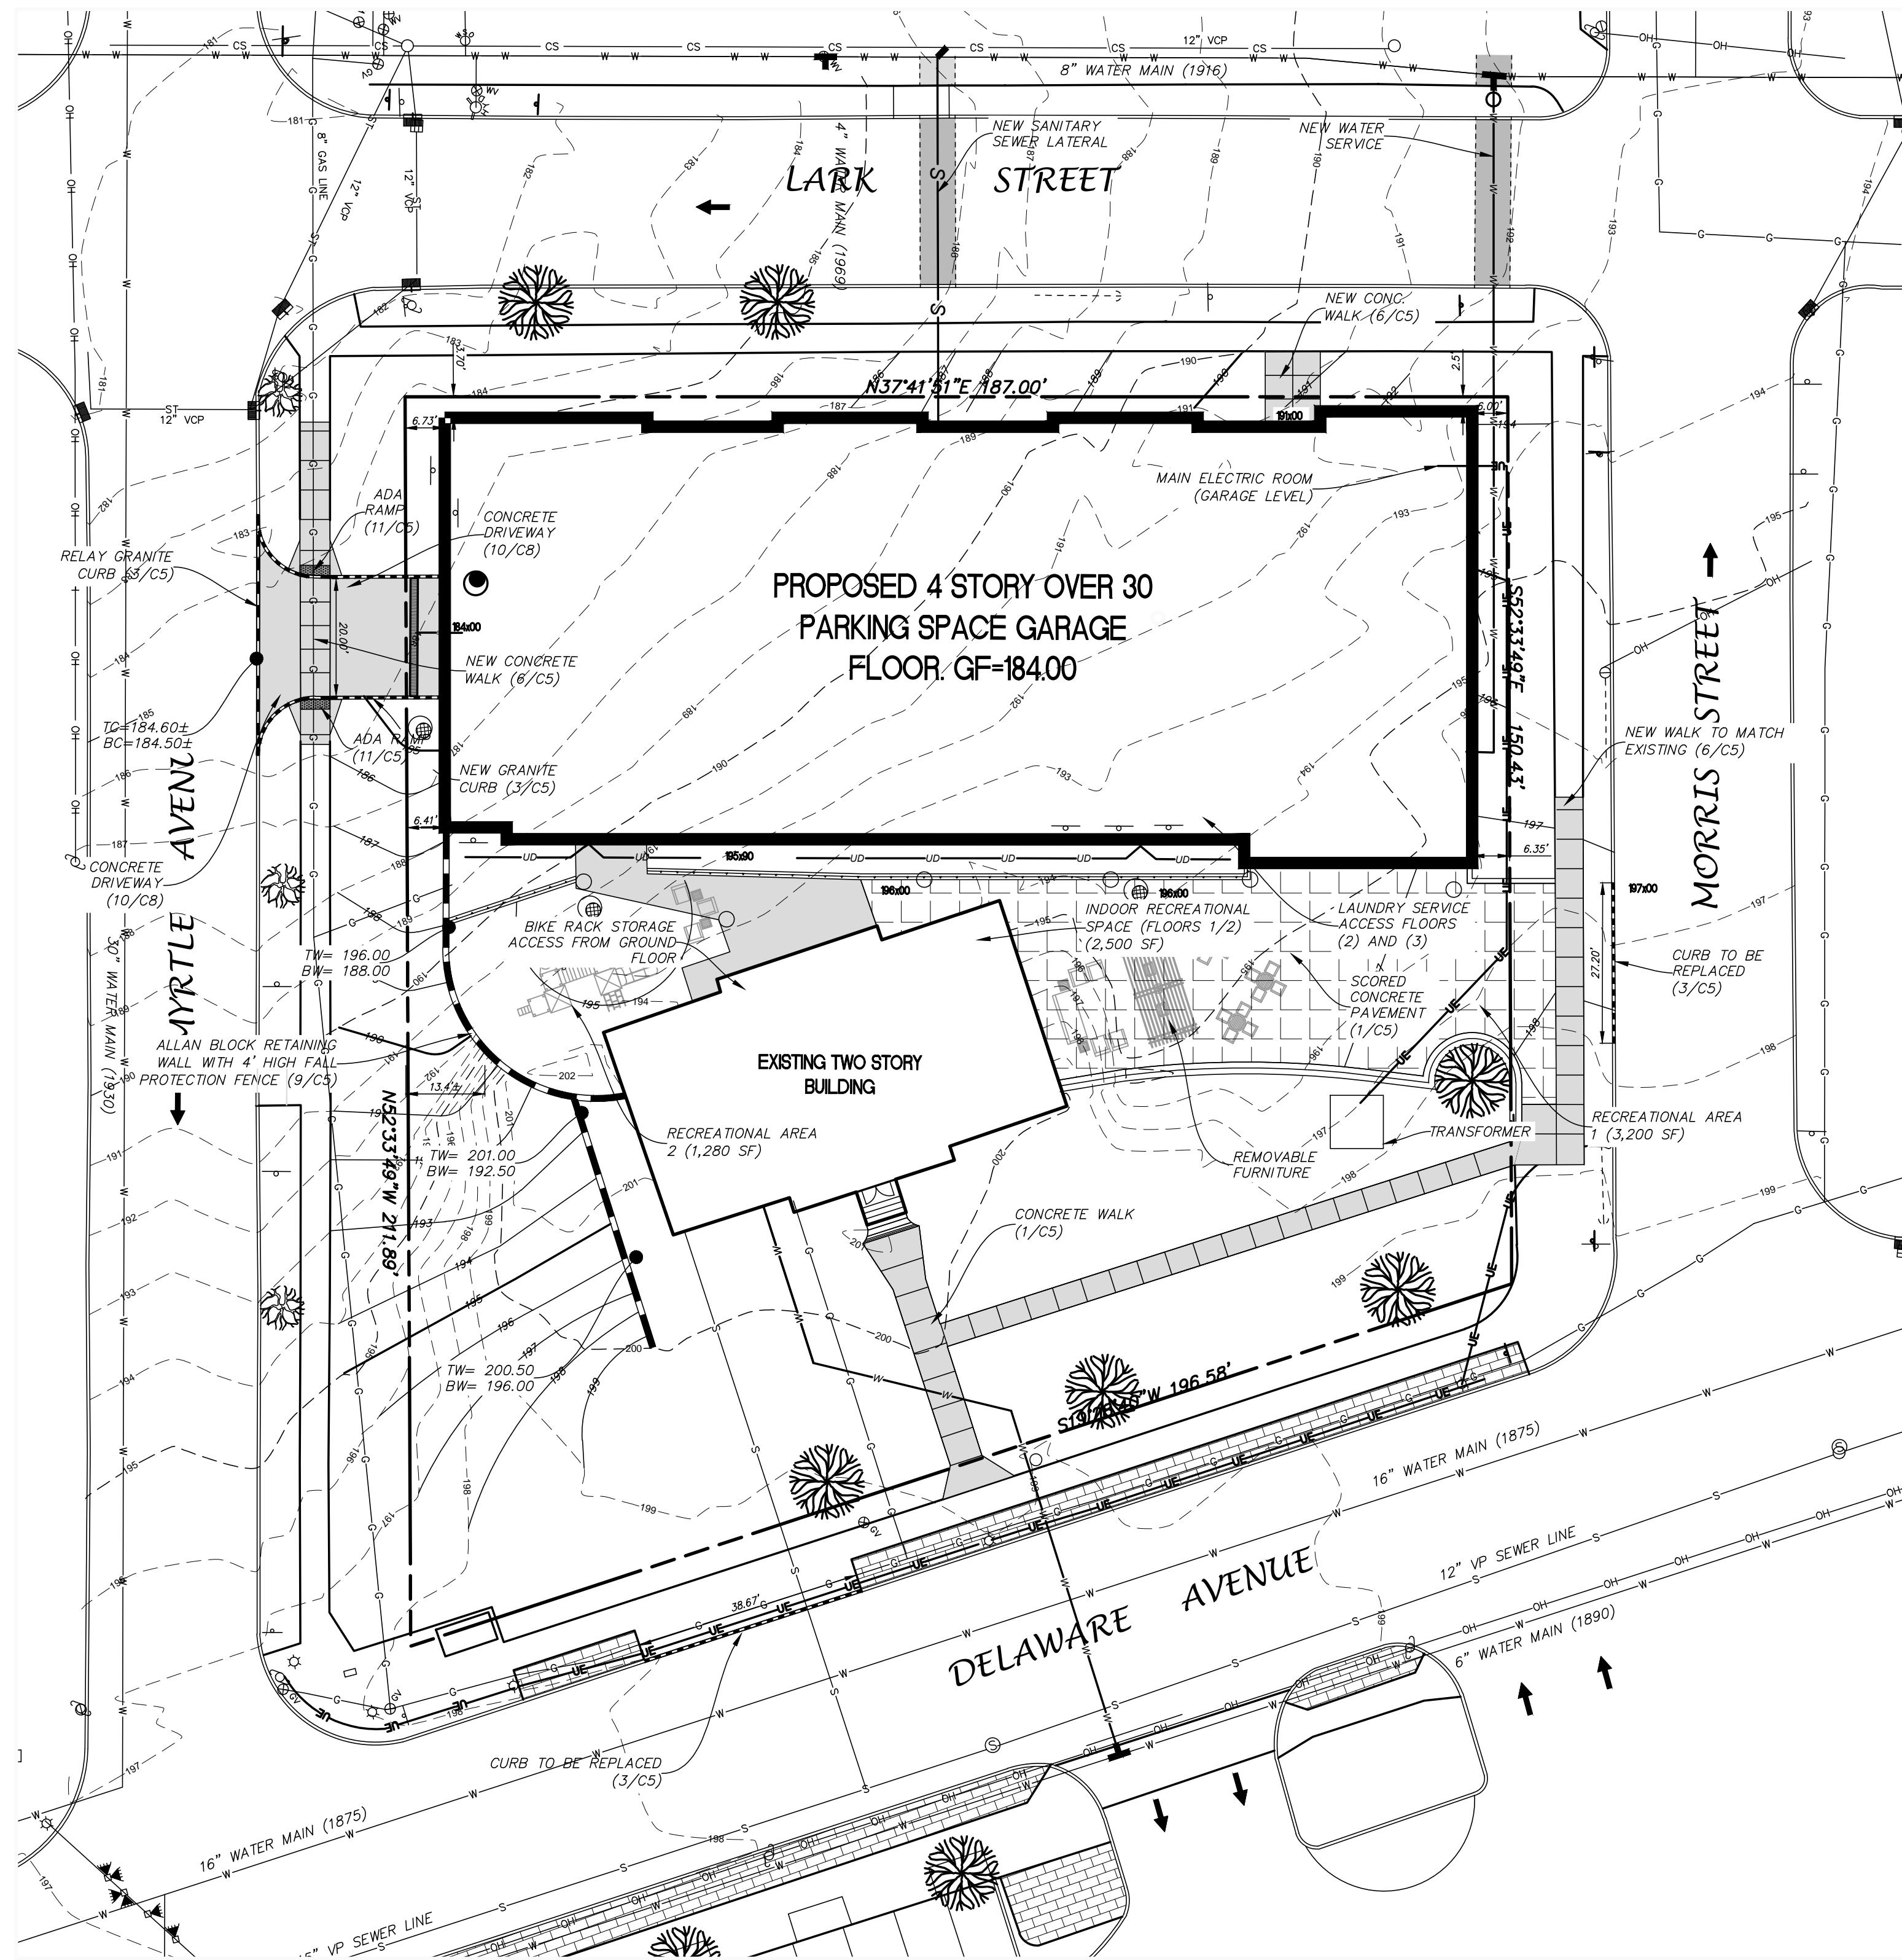

GRAPHIC SCALE

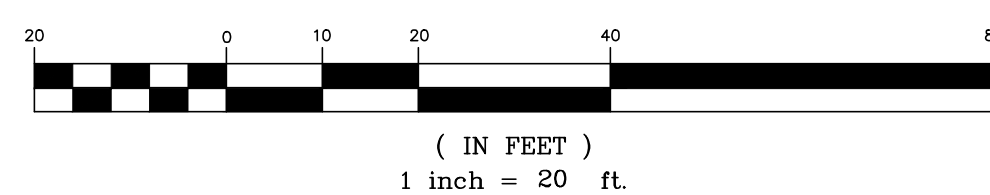

EXISTING SITE COVERAGE STATISTICS			
DESCRIPTION	S.F.	ACRES	%
GROSS SITE AREA	33,877	0.78	100.00%
IMPERVIOUS AREA	11,932	0.27	34.6
BUILDING COVERAGE	2,767	0.06	7.6
PAVEMENT/SIDEWALK COVERAGE	9,165	0.21	26.9
PERVIOUS AREA	21,945	0.51	65.4

PROPOSED SITE COVERAGE STATISTICS			
DESCRIPTION	S.F.	ACRES	%
GROSS SITE AREA	33,877	0.78	100.00%
IMPERVIOUS AREA	19,234	0.44	56.8
BUILDING COVERAGE	15,234	0.35	45.0
PAVEMENT/SIDEWALK COVERAGE	4,000	0.09	11.8
PERVIOUS AREA	14,643	0.34	43.2

RECREATION SPACE TABLE			
description	requirement	quantity	# required
dwelling, multi family	10% of site area	33,877 sf	3,388 sf
area 1: outdoor			3,209 sf
area 2: outdoor			1,296 sf
area 4: community space (indoor)			2,413 sf
TOTAL			6,918 sf

ZONING REQUIREMENTS TABLE	
ZONE	MU-CU: MIXED-USE, COMMUNITY URBAN
MINIMUM LOT WIDTH	25'
MAXIMUM HEIGHT	5 STORIES
SETBACKS	FRONT 10' MAX SIDE 0' REAR 15' (ADJACENT TO R-DISTRICT)

PROPOSED

- ⊗ WV EXISTING WATER VALVE
- ⊙ EXISTING POLE WITH LIGHT
- ⊙ EXISTING LIGHT POLE
- ⊙ EXISTING UTILITY POLE
- ⊙ EXISTING SIGN
- W EXISTING WATER MAIN
- S EXISTING SANITARY SEWER MAIN
- ST EXISTING STORM SEWER MAIN
- ⊕ CB OR ⊕ CB EXISTING CATCH BASIN
- ⊙ MH EXISTING MANHOLE
- ⊙ WATER SHUT OFF
- X FENCE LINE
- EXISTING PAVEMENT
- 199 EXISTING CONTOURS
- 200 EXISTING CONTOURS
- 201 PROPOSED CONTOURS
- W PROPOSED WATER MAIN
- S PROPOSED SANITARY SEWER MAIN
- ST PROPOSED STORM SEWER
- ⊕ CB OR ⊕ CB PROPOSED CATCH BASIN
- ⊙ PROPOSED MANHOLE
- PROPOSED SIDEWALK AND HANDICAPPED RAMP
- DETECTABLE SURFACE
- ⊙ HANDICAPPED PARKING
- PROPOSED BUILDING
- PROPOSED CURB
- ADA RAMP
- VCS DETAIL/SHEET NUMBER

CITY OF ALBANY NOTES

SITE REQUIREMENTS:
 THE CONTRACTOR WILL BE RESPONSIBLE FOR THE FOLLOWING:
 THE REMOVAL AND REPLACING OF ALL EXISTING SIDEWALKS, CURBS, STREET PAVEMENT, TREES, BRICK PAVERS, AND SHRUBBERY DAMAGED DURING THE COURSE OF THIS PROJECT AND WITHIN THE FULL LIMITATIONS OF THE PROJECT.
 IT WILL BE THE CONTRACTORS RESPONSIBILITY TO ENSURE THAT ALL METHODS AVAILABLE HAVE BEEN TAKEN TO PROTECT ALL THE FOREMENTIONED ENTITIES BEFORE CONSTRUCTION WORK BEGINS.
 IF AT ANY TIME DURING SAID CONSTRUCTION, THE CITY ENGINEER OR HIS REPRESENTATIVE DEEM THAT ANY AND/OR ALL PORTIONS OF SIDEWALK, CURB PAVEMENT AND/OR ANY OTHER APPURTENANCES HAVE BEEN DAMAGED BY EITHER THE GENERAL CONTRACTOR OR ANY OF HIS SUB-CONTRACTORS, IT WILL BE THE RESPONSIBILITY OF THE GENERAL CONTRACTOR TO MAKE ALL REPAIRS AND/OR CORRECTIONS TO SAID AREAS WITHOUT ANY COST TO THE CITY OF ALBANY.

PERMIT REQUIREMENTS:
 THE GENERAL CONTRACTOR, PRIOR TO BEGINNING ANY WORK ON SAID PROJECT, WILL PROCURE THE FOLLOWING PERMITS WHERE APPLICABLE:
 *ENGINEERING DEPARTMENT *DEPARTMENT OF GENERAL SERVICES
 *GRADING AND MINING *CURB CUT APPLICATION
 *SANITARY/STORM SEWER *SIDEWALK/CURB RESTORATION
 *RETAINING WALL *STREET RESTORATION
 *WATER DEPARTMENT *WATER SERVICE


THE CONTRACTOR WILL PROCURE BEFORE BEGINNING OF CONSTRUCTION ALL REQUIRED PERMITS LIABILITY INSURANCE FOR \$1,000,000.00 AND A PERFORMANCE BOND AS ASSESSED BY CITY ENGINEER. BOND AND LIABILITY INSURANCE TO BE SUBMITTED TO THE ENGINEERING DEPARTMENT BEFORE THE GENERAL CONTRACTOR INTENDS TO BEGIN ANY SITE OCCUPATION.

THE CONTRACTOR WILL NOTIFY THE ENGINEERING DEPARTMENT FORTY-EIGHT (48) HOURS PRIOR TO PERFORMING ALL UTILITY OR SITE RESTORATION WORK. FAILURE TO NOTIFY THE ENGINEERING DEPARTMENT BEFORE BEGINNING WORK COULD RESULT IN A ONE HUNDRED DOLLAR (\$100.00) FINE FOR EACH DAY THE OFFENSE OCCURS.

THE CONTRACTOR WILL NOTIFY THE DEPARTMENT OF WATER AND WATER SUPPLY FORTY-EIGHT (48) HOURS PRIOR TO SCHEDULE AN INSPECTION FOR WATER, SANITARY AND STORM UTILITY WORK.


NOTES

1. THE CONTRACTOR SHALL OBTAIN A STREET OPENING PERMIT AND A STREET ACCESS APPLICATION (CURB-CUT) FROM THE DEPARTMENT OF GENERAL SERVICES FOR ANY WORK WITHIN THE CITY'S ROW. CONTACT GARY BOHL AT 518-462-3529
2. A GRADING PERMIT IS REQUIRED. CONTRACTOR TO CONTACT PATRICK MCCUTCHEON, ENGINEERING DEPARTMENT (518-434-2387) FOR APPLICATION AND REVIEW.
3. A GRADING EASEMENT OR TEMPORARY SHORE PLANE WILL BE NEEDED ALONG THE EAST AND NORTH LINES OF THE PROJECT SITE FOR CONSTRUCTION OF RETAINING WALL.
4. WASHER AND DRYER HOOKUPS ARE PROVIDED WITHIN EACH UNIT. SEE FLOOR PLANS FOR LOCATION.
5. GRADING PERMIT WITH GRADING EASEMENT REQUIRED. CONTACT PATRICK MCCUTCHEON, ENGINEERING DIVISION, PH (518)434-2387.
6. STREET OPENING PERMITS REQUIRED. CONTACT GARY BOHL, DEPARTMENT OF GENERAL SERVICES, PH (518)462-3519.

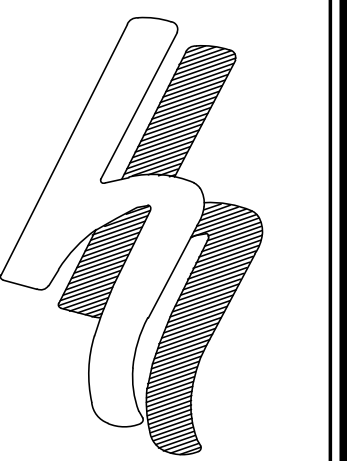

HERSHBERG & HERSHBERG
 Consulting Engineers and Land Surveyors
 18 Locust Street
 Albany, New York 12203

ALTERATION OF THIS DOCUMENT EXCEPT BY A LICENSED PROFESSIONAL ENGINEER OR LAND SURVEYOR, IS ILLEGAL



DATE	REVISIONS
02/26/21	GENERAL UPDATES
04/27/21	GENERAL UPDATES
05/17/21	GENERAL UPDATES

SITE PLAN FOR
25 DELAWARE AVENUE
ALBANY, NY

FILE: 180244
 DATE: 11/10/20
 SCALE: 1"=20'
 CIVIL: DRW
 180244-SDWG

MAP POCKET #2


MAP #C – 5

SITE DETAILS


MAP POCKET #3

SHEET C-6

UTILITY PLAN

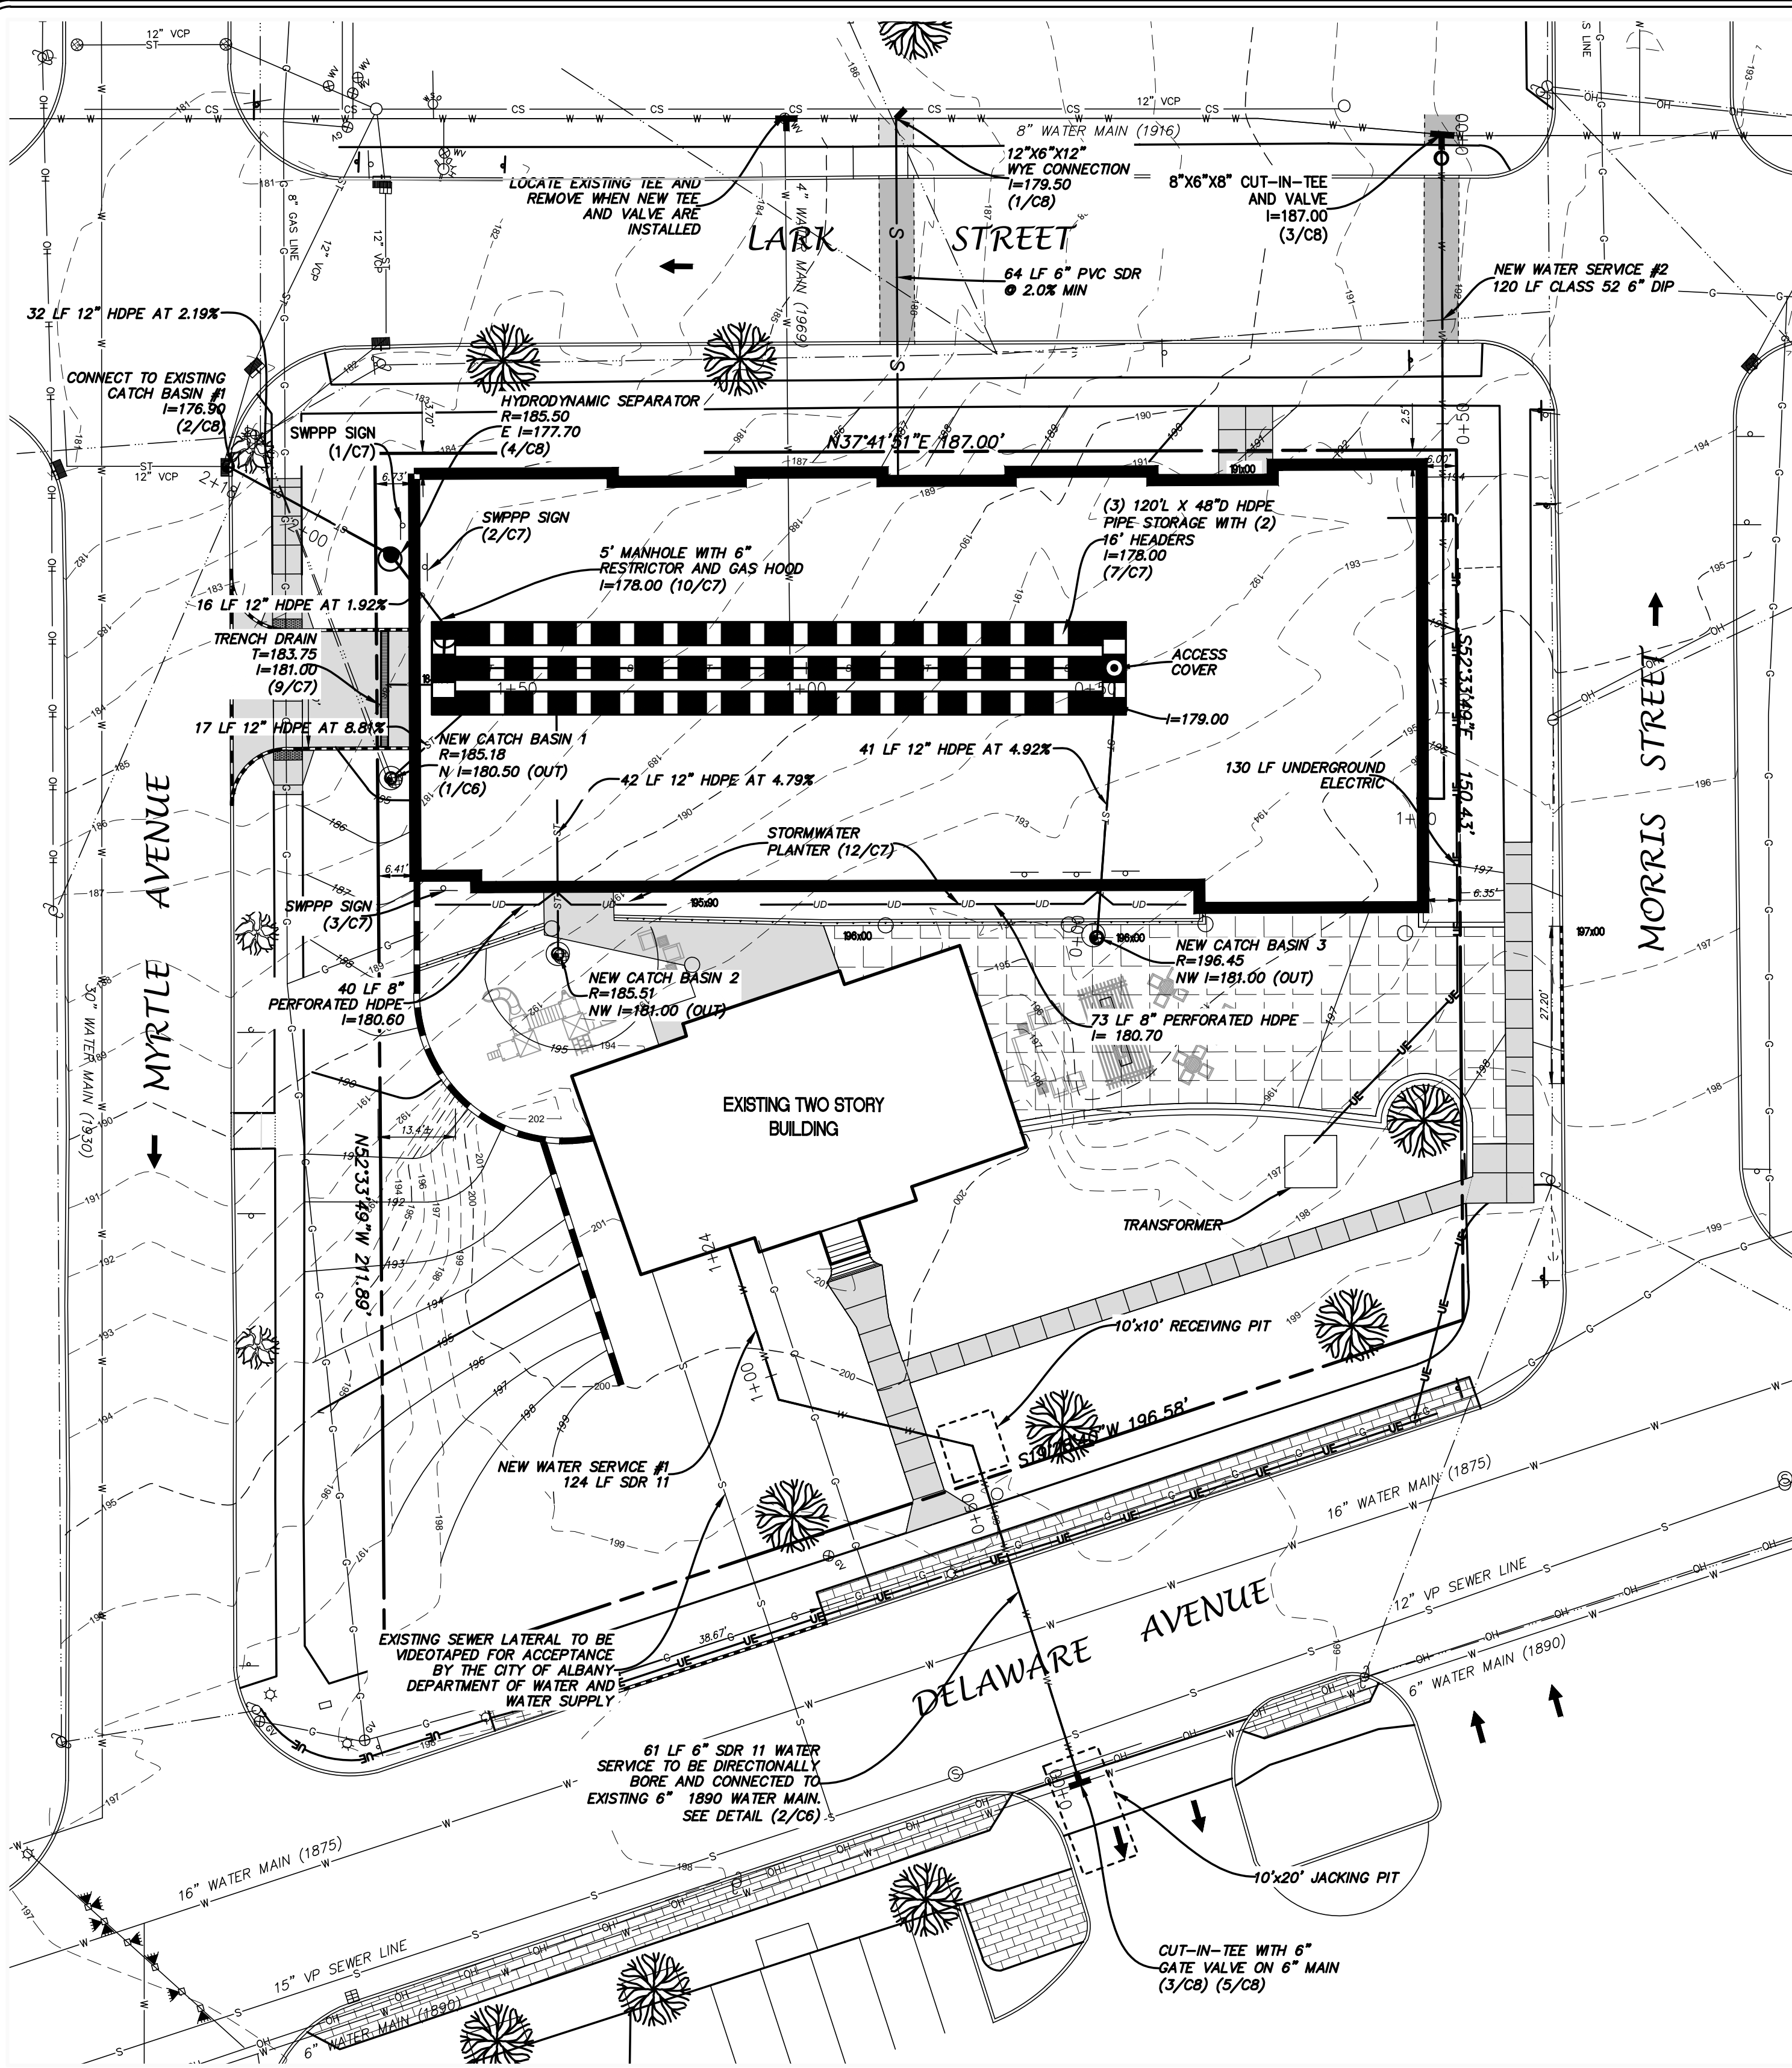


UTILITY PLAN
SCALE: 1"=20'

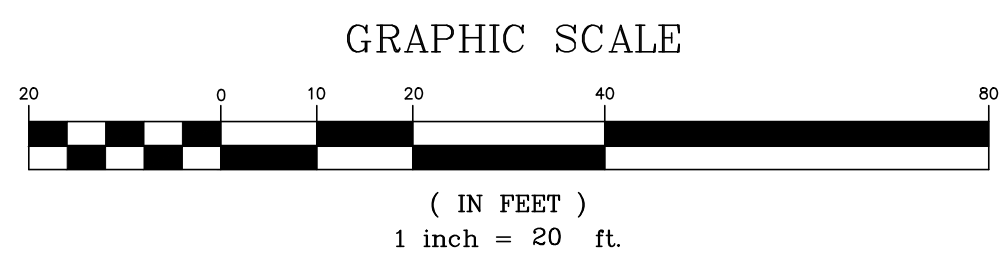


NOTES


- 48 HOURS NOTICE MUST BE GIVEN TO DEPARTMENT OF WATER FOR INSPECTIONS FOR THE SANITARY, WATER AND STORMWATER UTILITIES.
- PRESSURE AND LEAKAGE TESTING OF THE WATER MAIN SHALL BE WITNESSED BY DEPARTMENT STAFF AND ACCEPTABLE BACTERIOLOGICAL TEST MUST BE SUBMITTED AND ACCEPTED BY THE DEPARTMENT PRIOR TO FINAL OF THE NEW WATER MAIN.
- PRIOR TO USE, ALL WATER LINES MUST BE CHLORINATED AND HAVE A BACTERIOLOGICAL TEST PERFORMED IN ACCORDANCE WITH CITY OF ALBANY STANDARDS.
- A SITE ASSESSMENT THAT CERTIFIES EROSION AND SEDIMENT CONTROLS DESCRIBED IN THE SWPPP ARE IN PLACE PRIOR TO CONSTRUCTION COMMENCEMENT MUST BE COMPLETED BY A QUALIFIED PROFESSIONAL AND SUBMITTED TO THE MS4 COORDINATOR AT DEPARTMENT OF WATER WITHIN 24 HOURS OF INSPECTION COMPLETION.
- THE WATER DEPARTMENT MUST BE NOTIFIED 1 WEEK IN ADVANCE OF ANTICIPATED WATER SERVICE WORK THAT WILL REQUIRE SHUTTING DOWN THE WATER MAIN.
- TWO SEPARATE WATER METERS WILL BE REQUIRED.

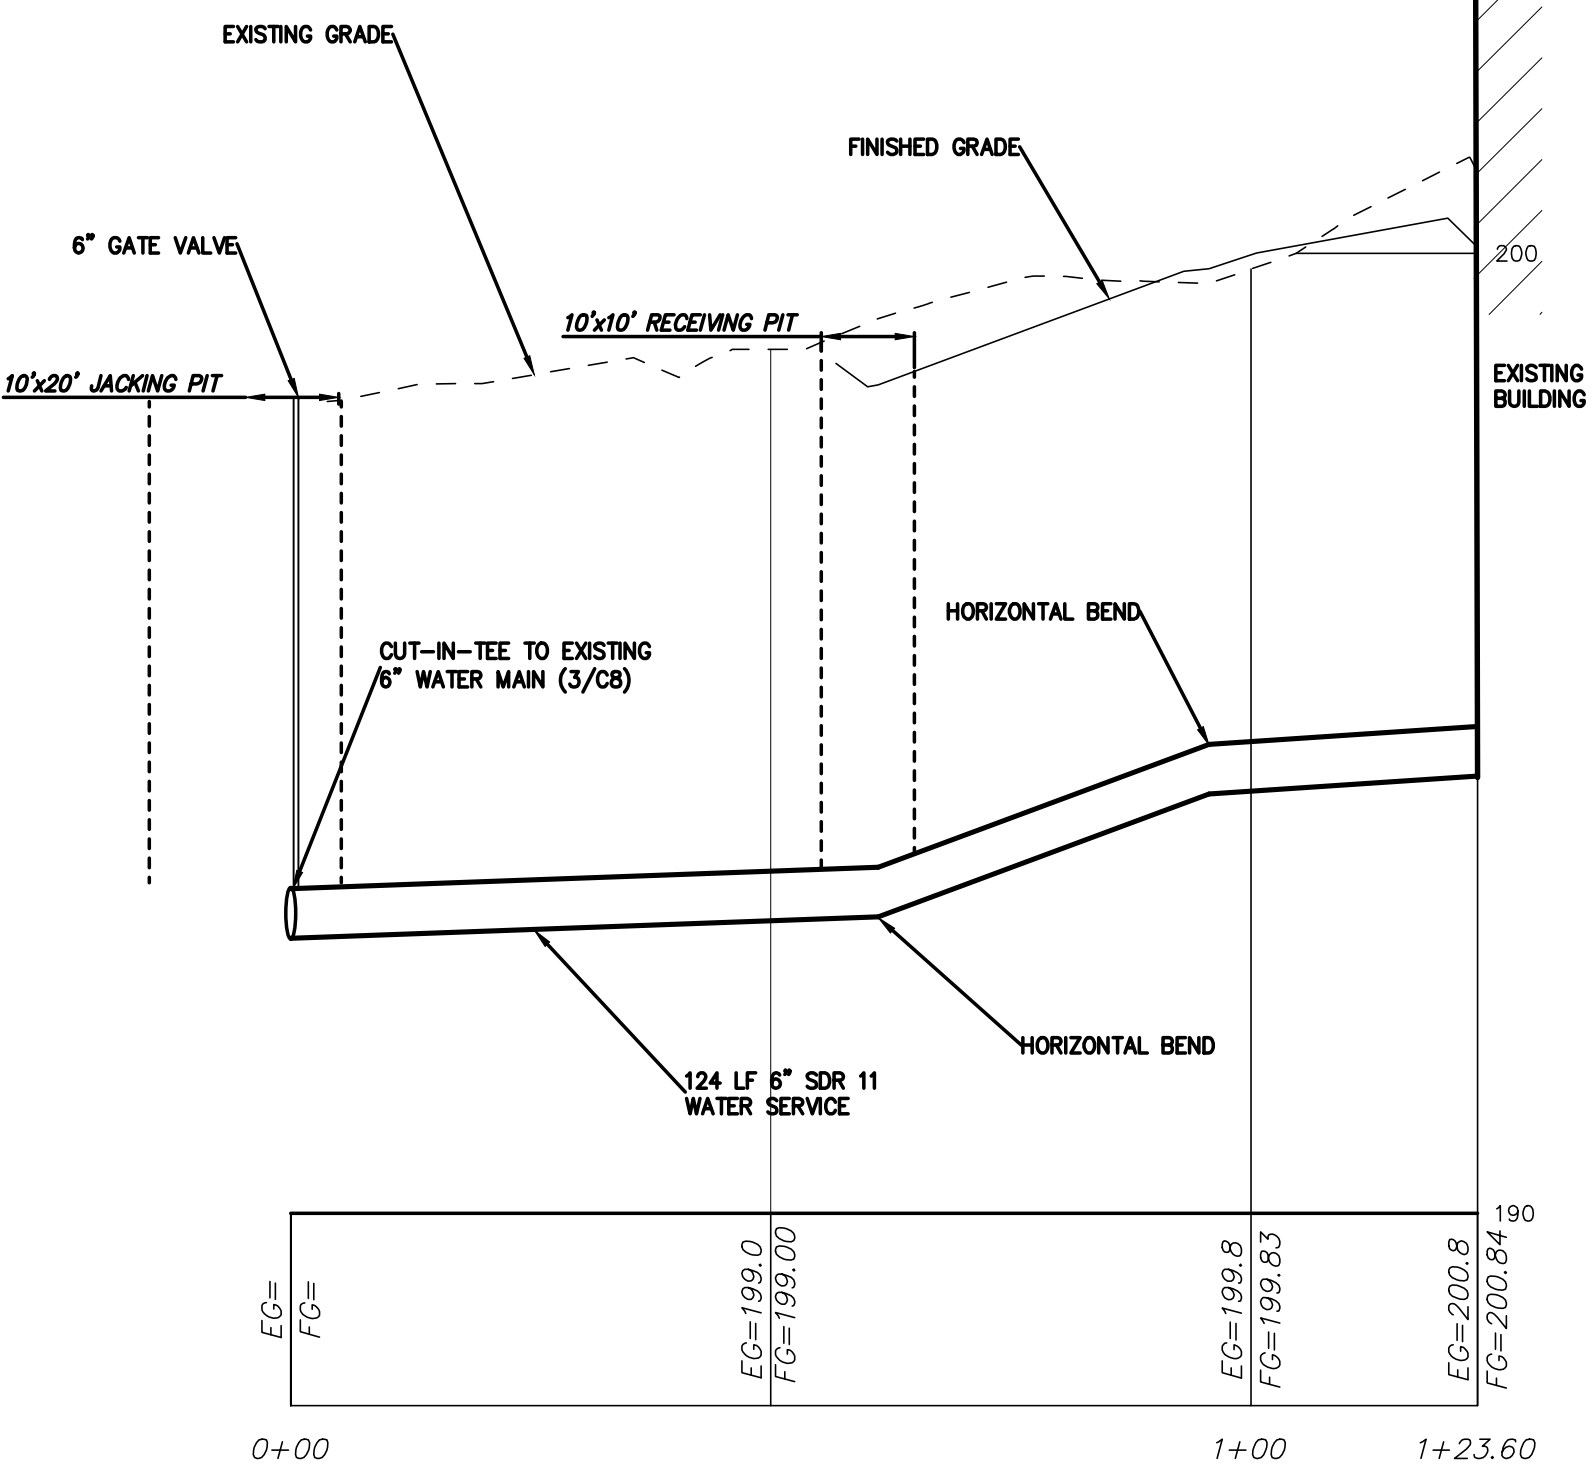

WATER SERVICE PROFILE 1
SCALE: 1"=2' (H) 1"=20' (V)

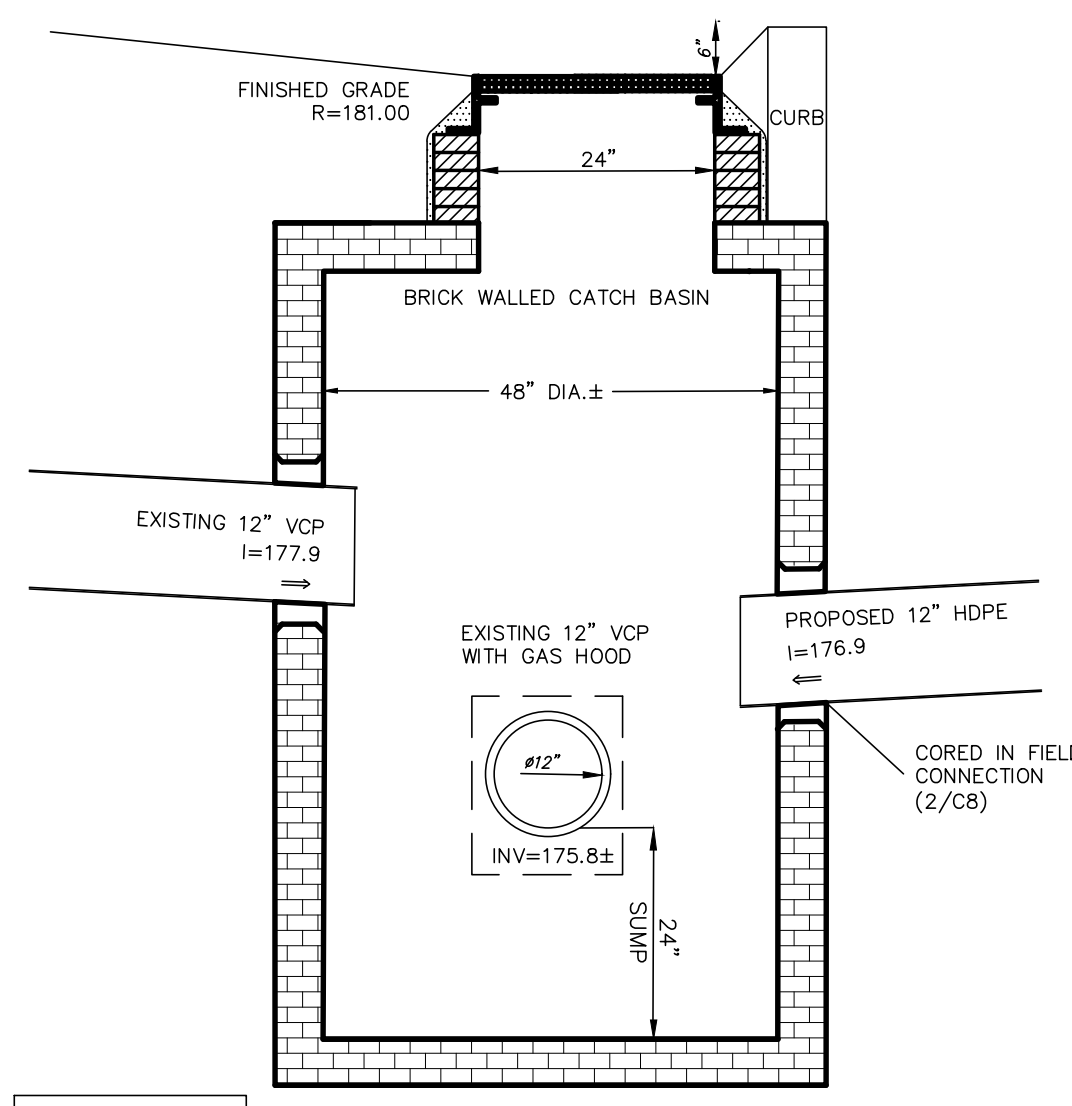


1/C6

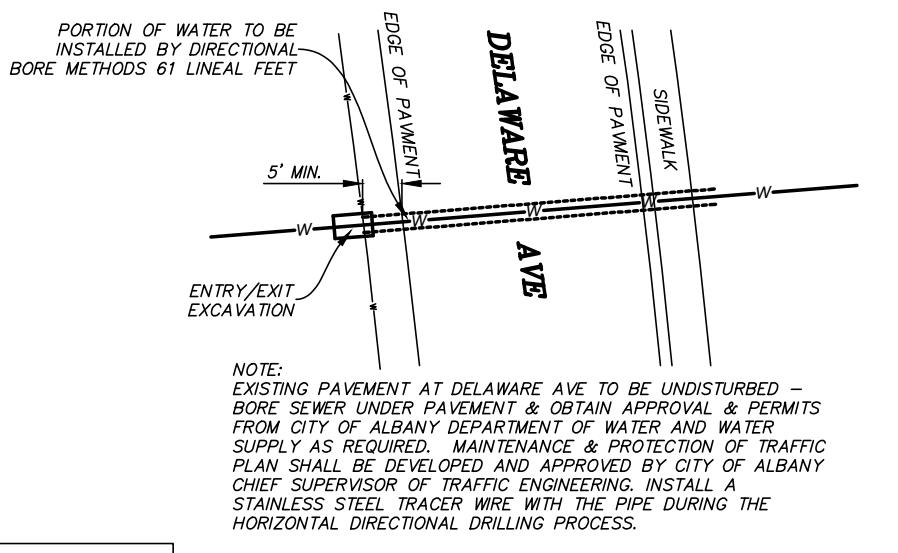


2/C6

LEGEND			
R.O.W.	RIGHT OF WAY	○	MONUMENT
No.	NUMBER	○	IRON ROD
enc.	ENCROACHMENT	○	MANHOLE
P.O.B.	POINT OF BEGINNING	⊠	CATCHBASIN
S.F.	SQUARE FEET	—	SIGN
N/F	NOW OR FORMERLY	—	BOLLARD
Fl.	FEET	—	FENCE LINE
Deg.	DEGREE	—	GUARD RAIL
R	RECORD	—	OVERHEAD WIRE, UTILITY POLE & GUY WIRE
M	MEASURED	—	TRAFFIC FLOW ACCESS AREA
N	NORTH	—	WATER SHUT OFF
S	SOUTH	—	HYDRANT
E	EAST	—	WATER VALVE
W	WEST	—	GAS VALVE
tel.	TELEPHONE	—	GAS TEST
elec.	ELECTRIC	—	GAS DRIP
L	LIBER	—	STREET LIGHT
P	PAGE	—	LIGHT POLE
—	WATER LINE	—	CONCRETE
—	SEWER LINE	—	PAVEMENT
—	GAS LINE	—	TREE CONIFEROUS DIAMETER OF TREE
—	UNDERGROUND ELECTRIC	—	TREE DECIDUOUS DIAMETER OF TREE
7/C3	DETAIL/SHEET NUMBER		

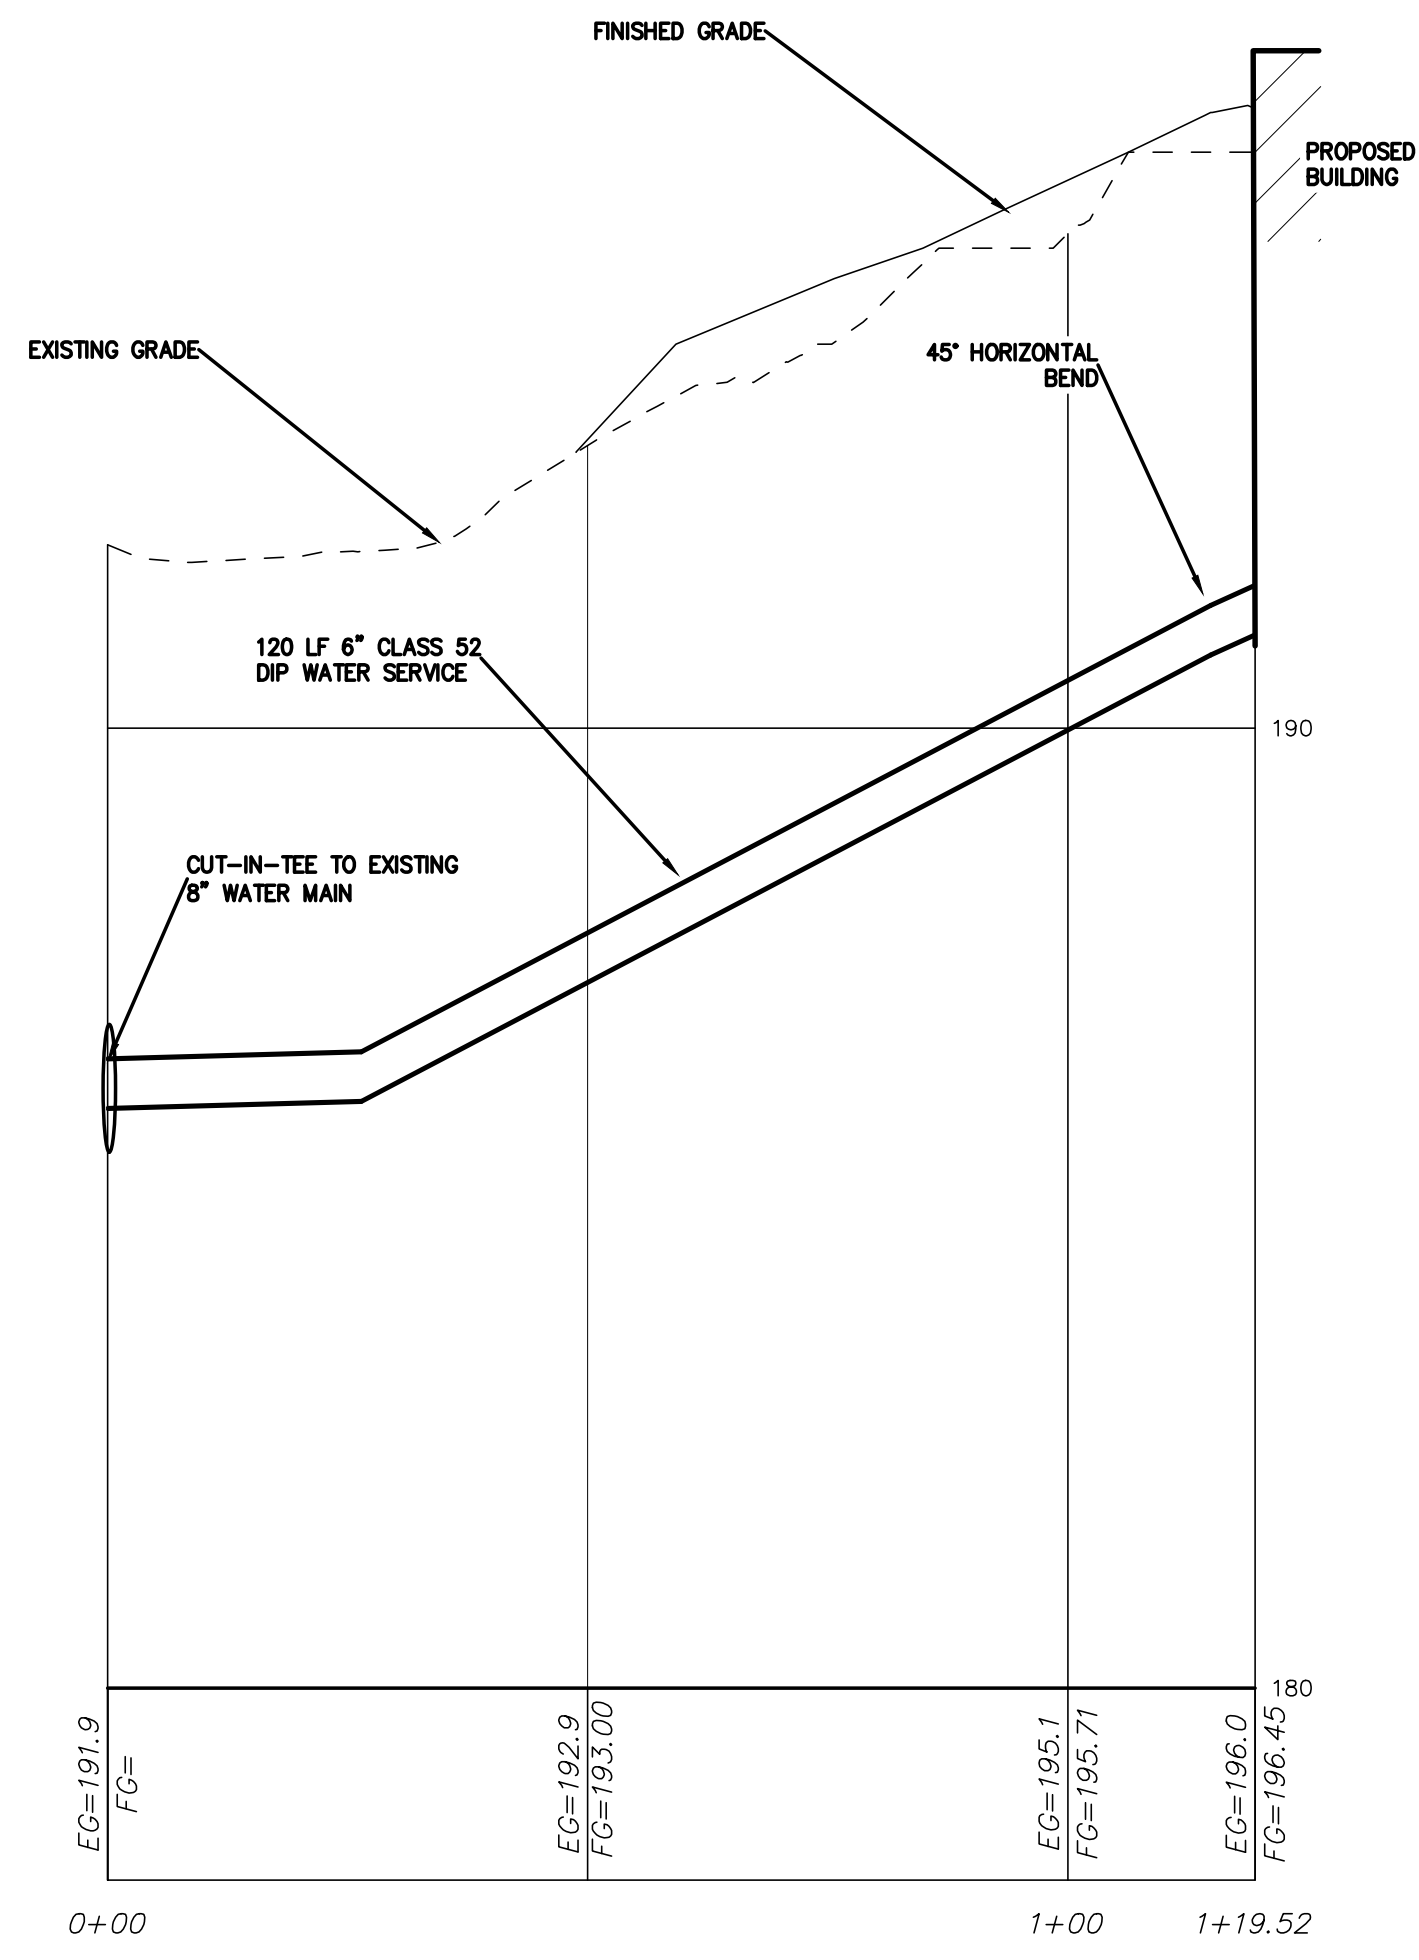


WATER SERVICE PROFILE 2
SCALE: 1"=2' (H) 1"=20' (V)

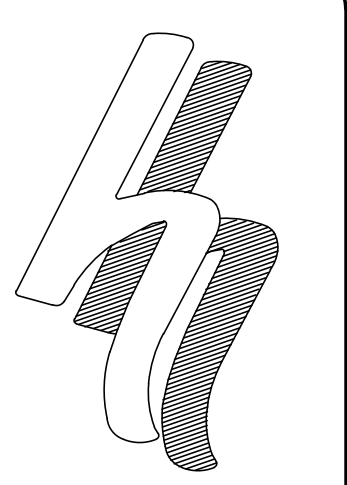

HERSBERG & HERSBERG
Consulting Engineers and Land Surveyors

18 Locust Street
Albany, New York 12203

ALTERATION OF THIS DOCUMENT EXCEPT BY A LICENSED PROFESSIONAL ENGINEER OR LAND SURVEYOR, IS ILLEGAL.



DATE	REVISIONS
02/26/21	GENERAL UPDATES
03/17/21	GENERAL UPDATES
04/27/21	TRANSFORMER ADDED
05/17/21	GENERAL UPDATES


**UTILITY PLAN FOR
25 DELAWARE AVENUE
ALBANY, NY**

FILE: 180244
SCALE: 1"=20'
CHK: DRH
DATE: 11/10/20
BY: TMO
PROJECT: 180244-3.DWG


MAP POCKET #4

MAP #C – 7


UTILITY DETAILS

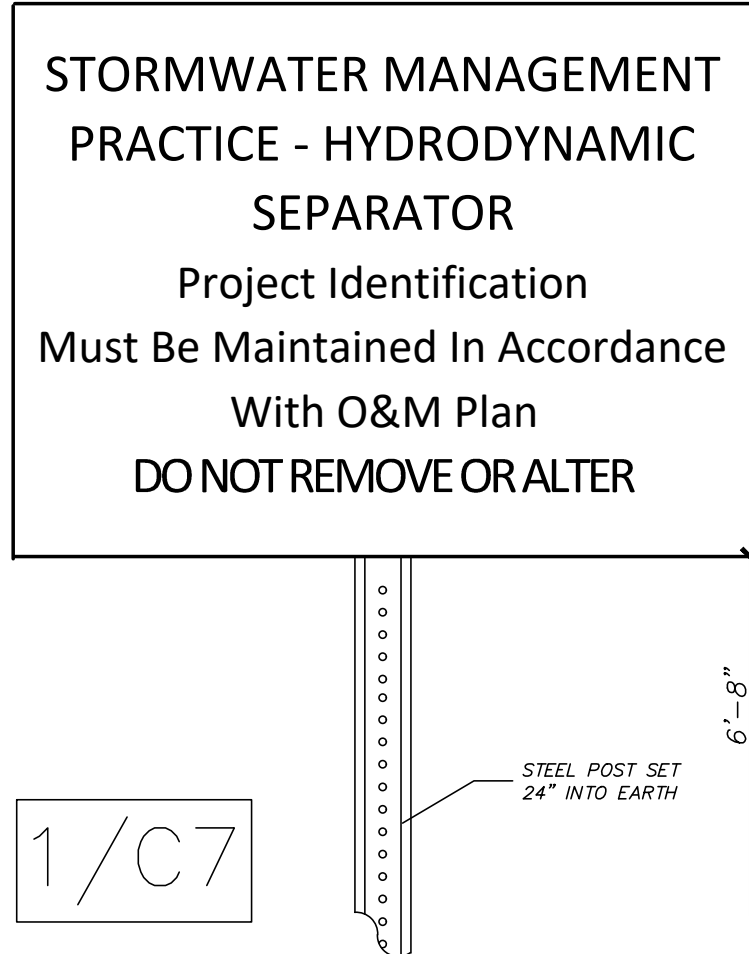











STORMWATER MANAGEMENT PRACTICE SIGN (AT HYDRODYNAMIC SEPARATOR LOCATION)

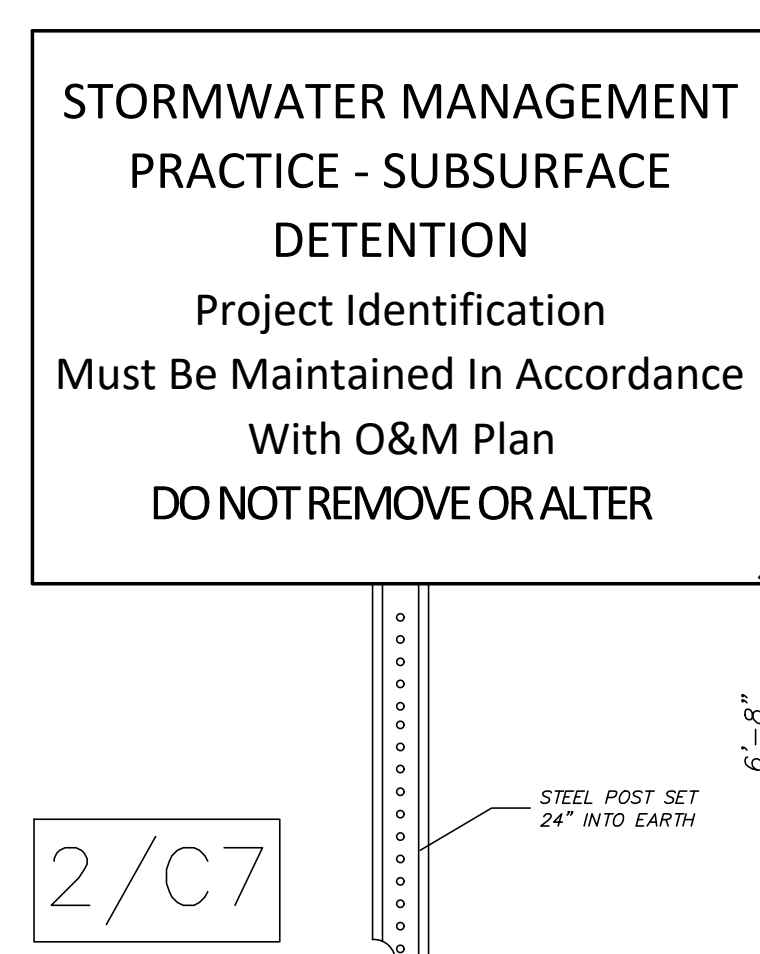

STORMWATER MANAGEMENT PRACTICE SIGN (AT SUBSURFACE DETENTION LOCATION)

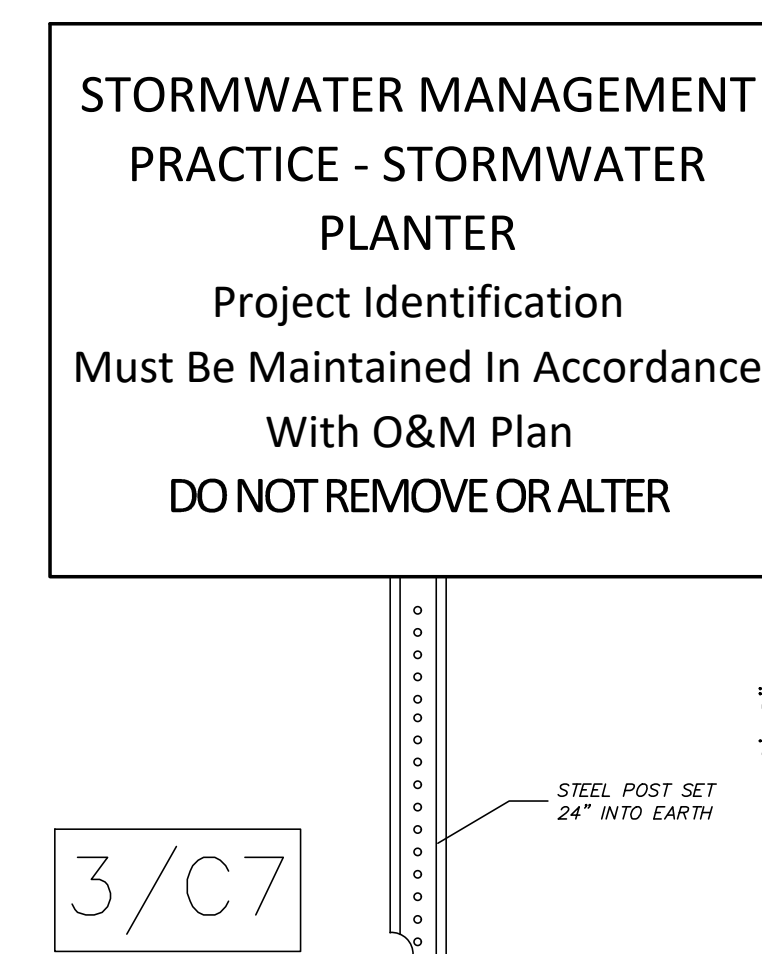


STORMWATER MANAGEMENT PRACTICE SIGN (AT STORMWATER PLANTER LOCATION)

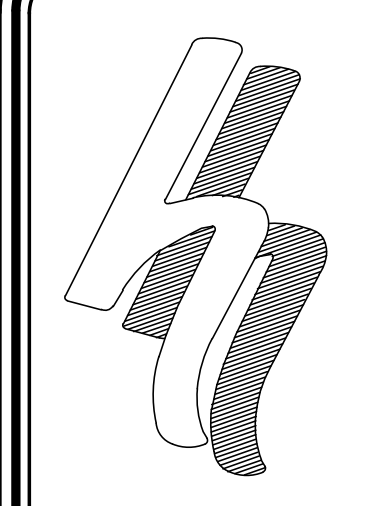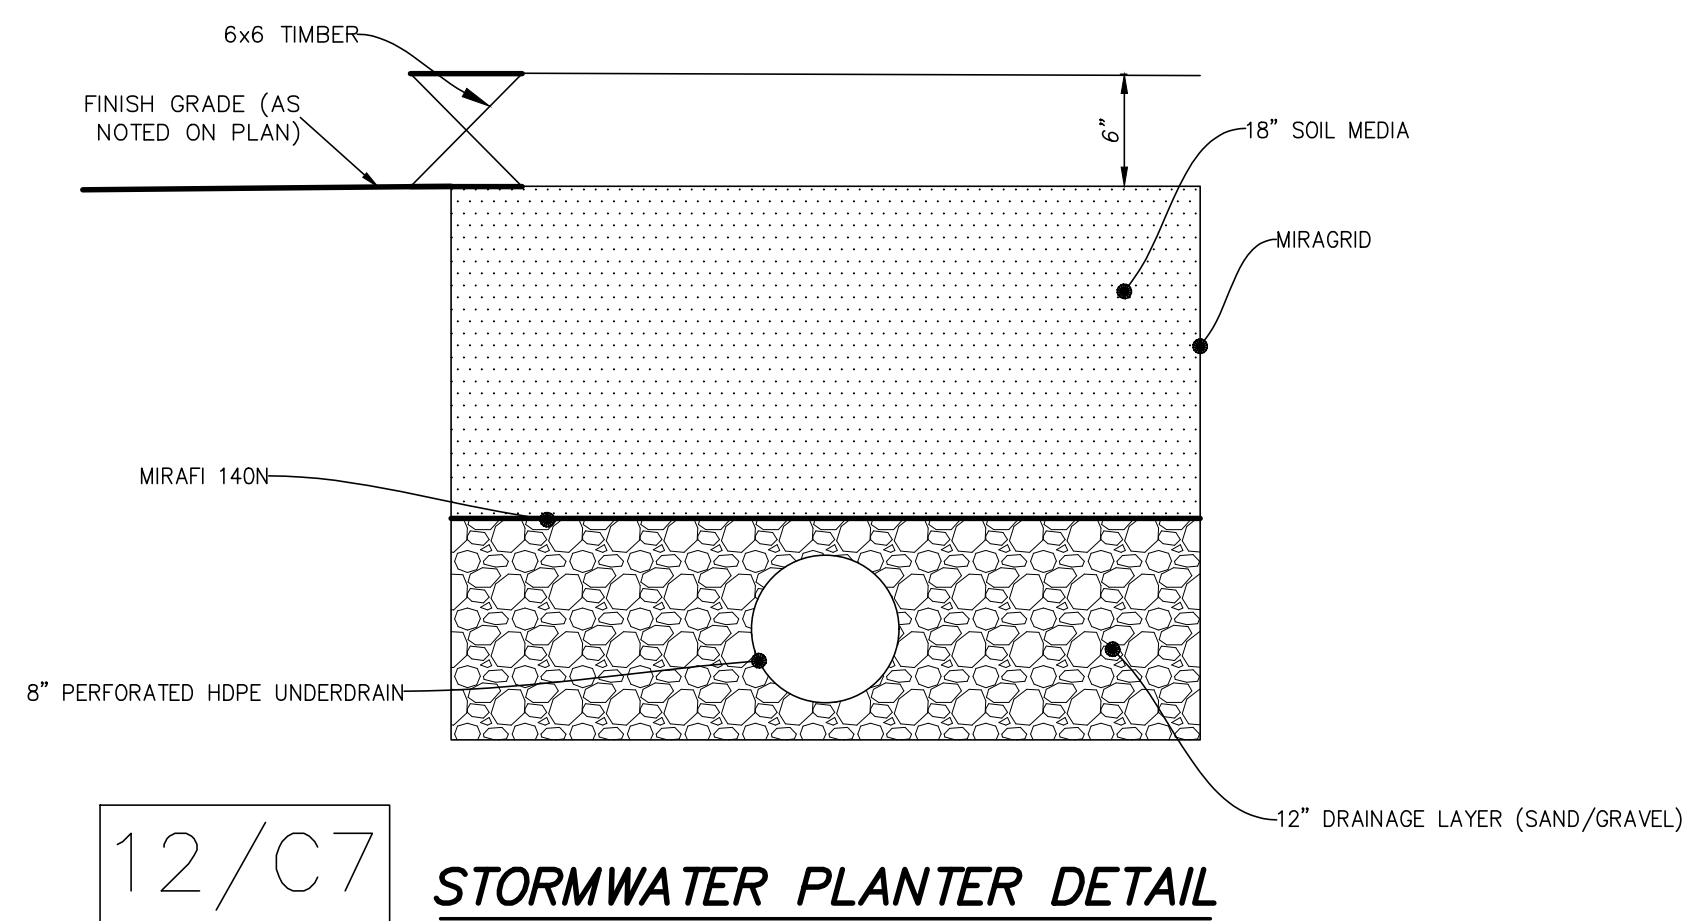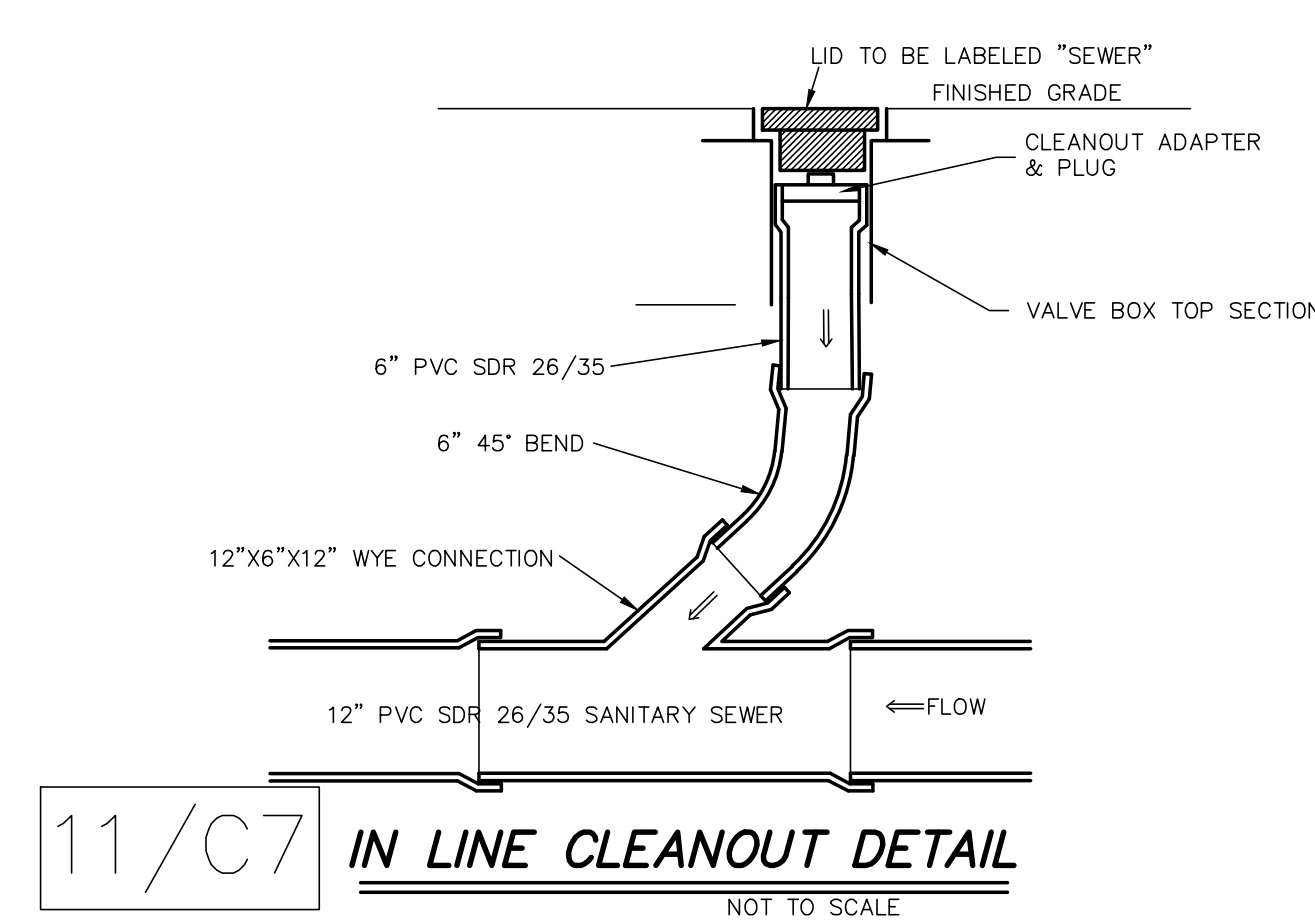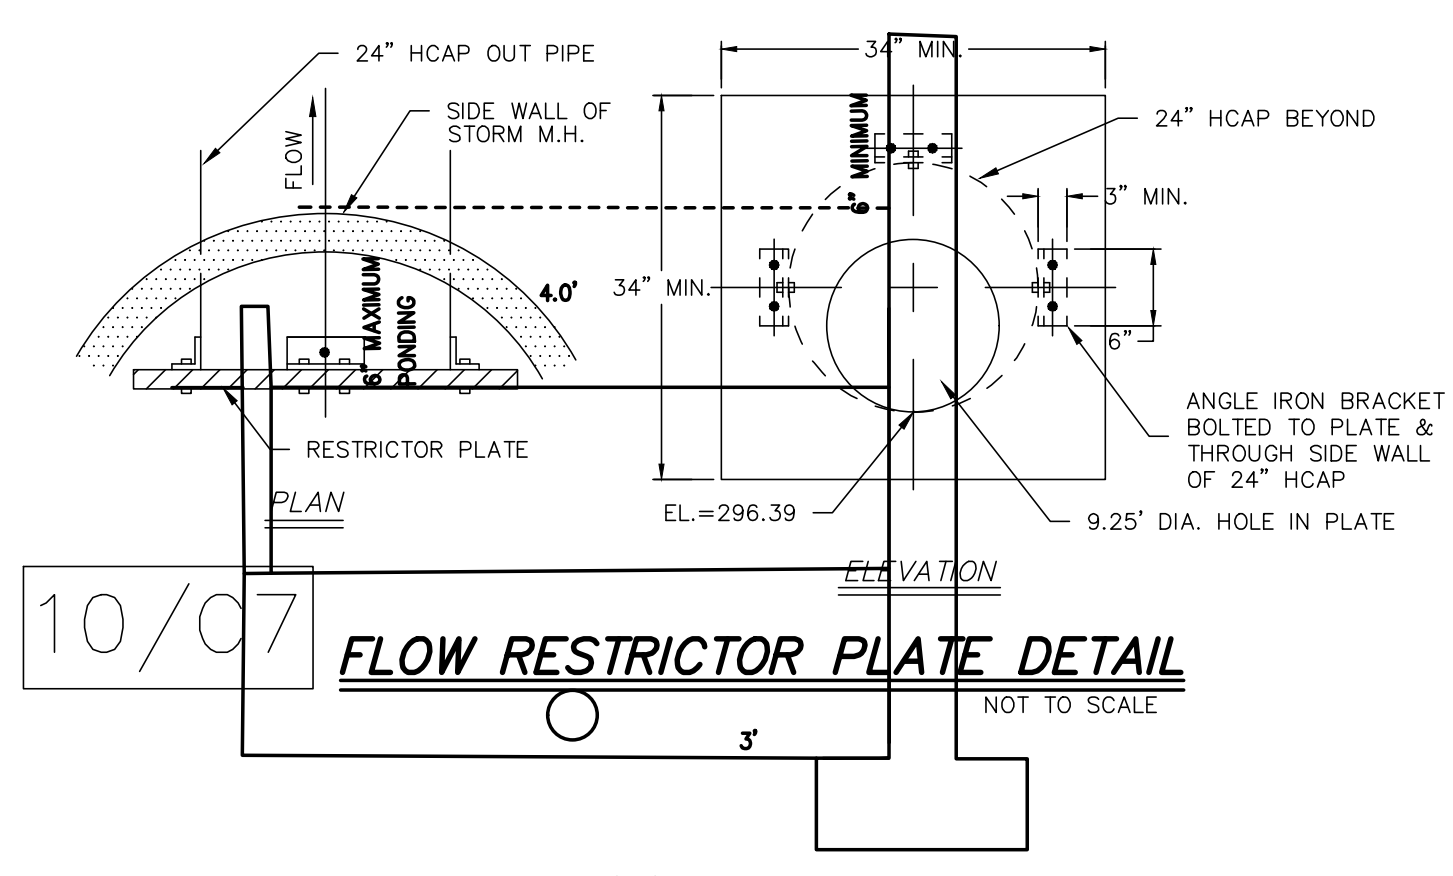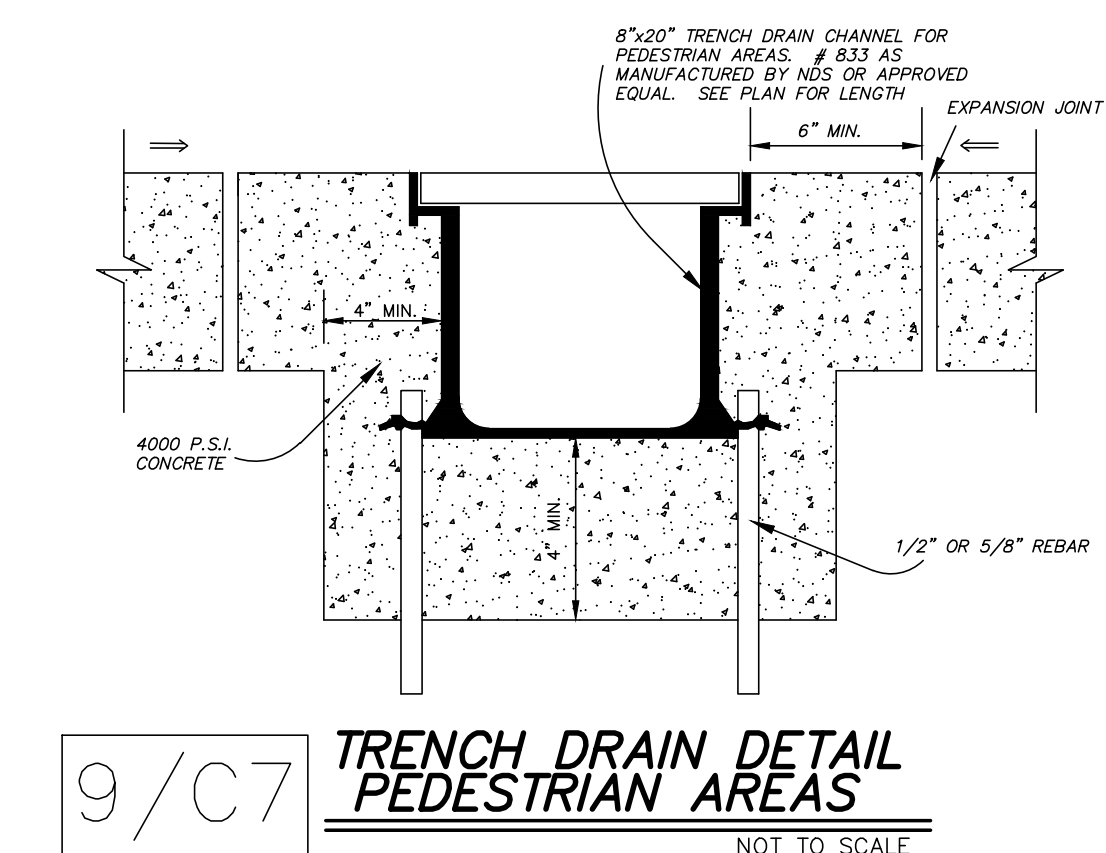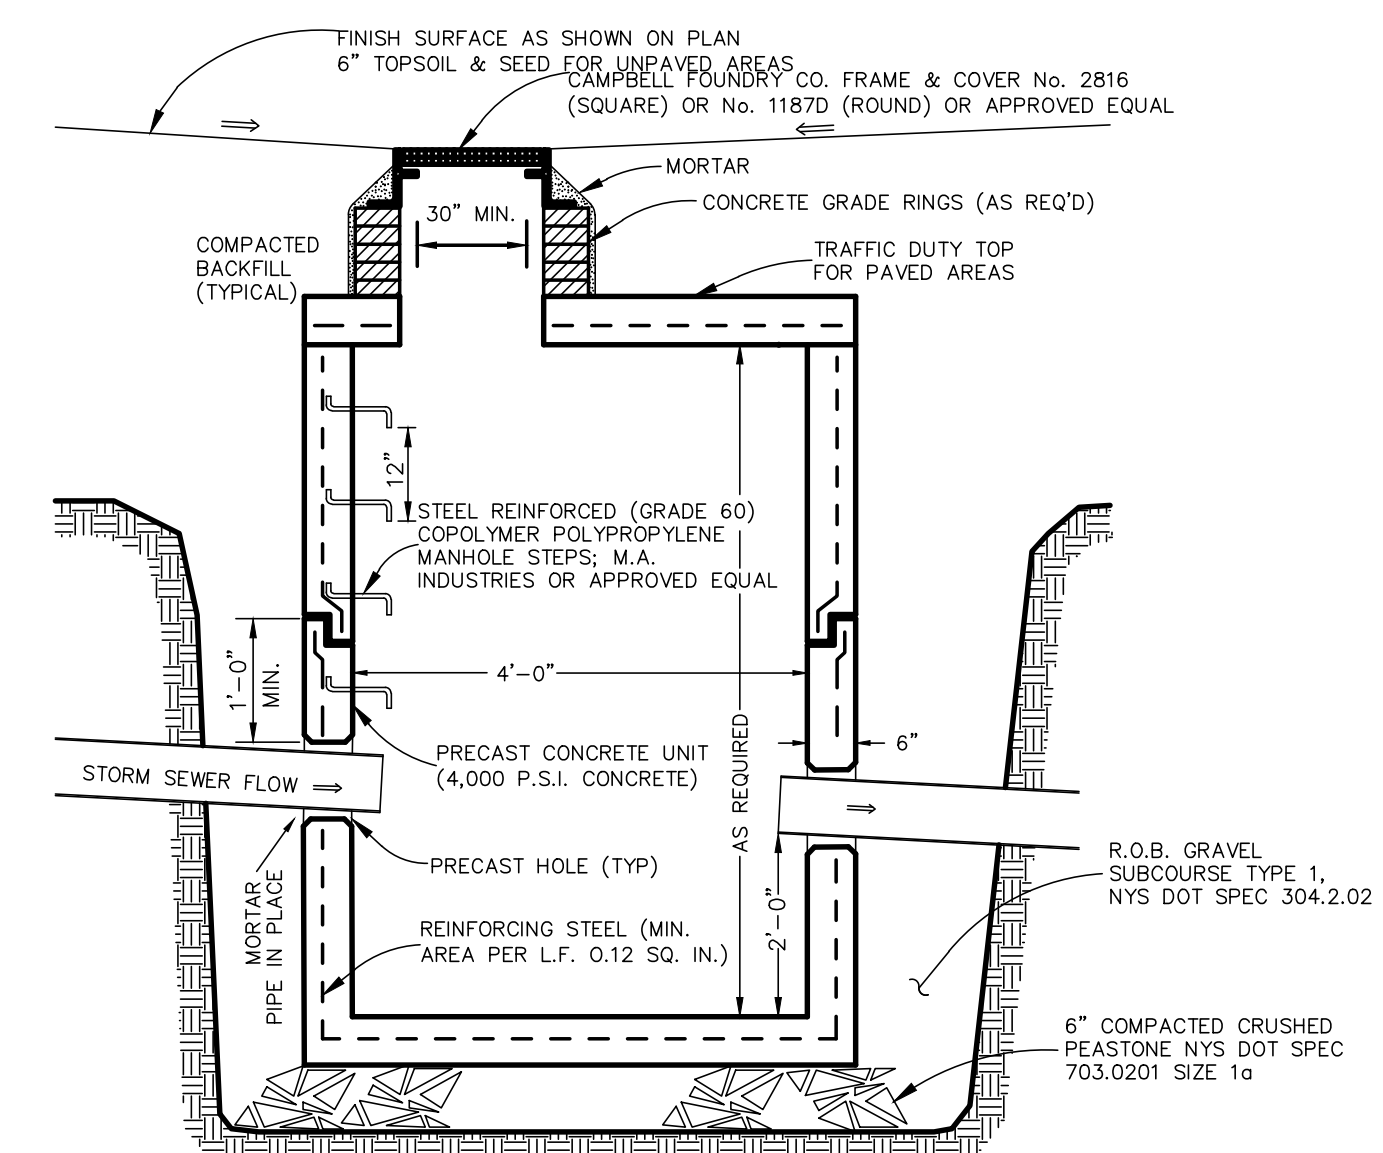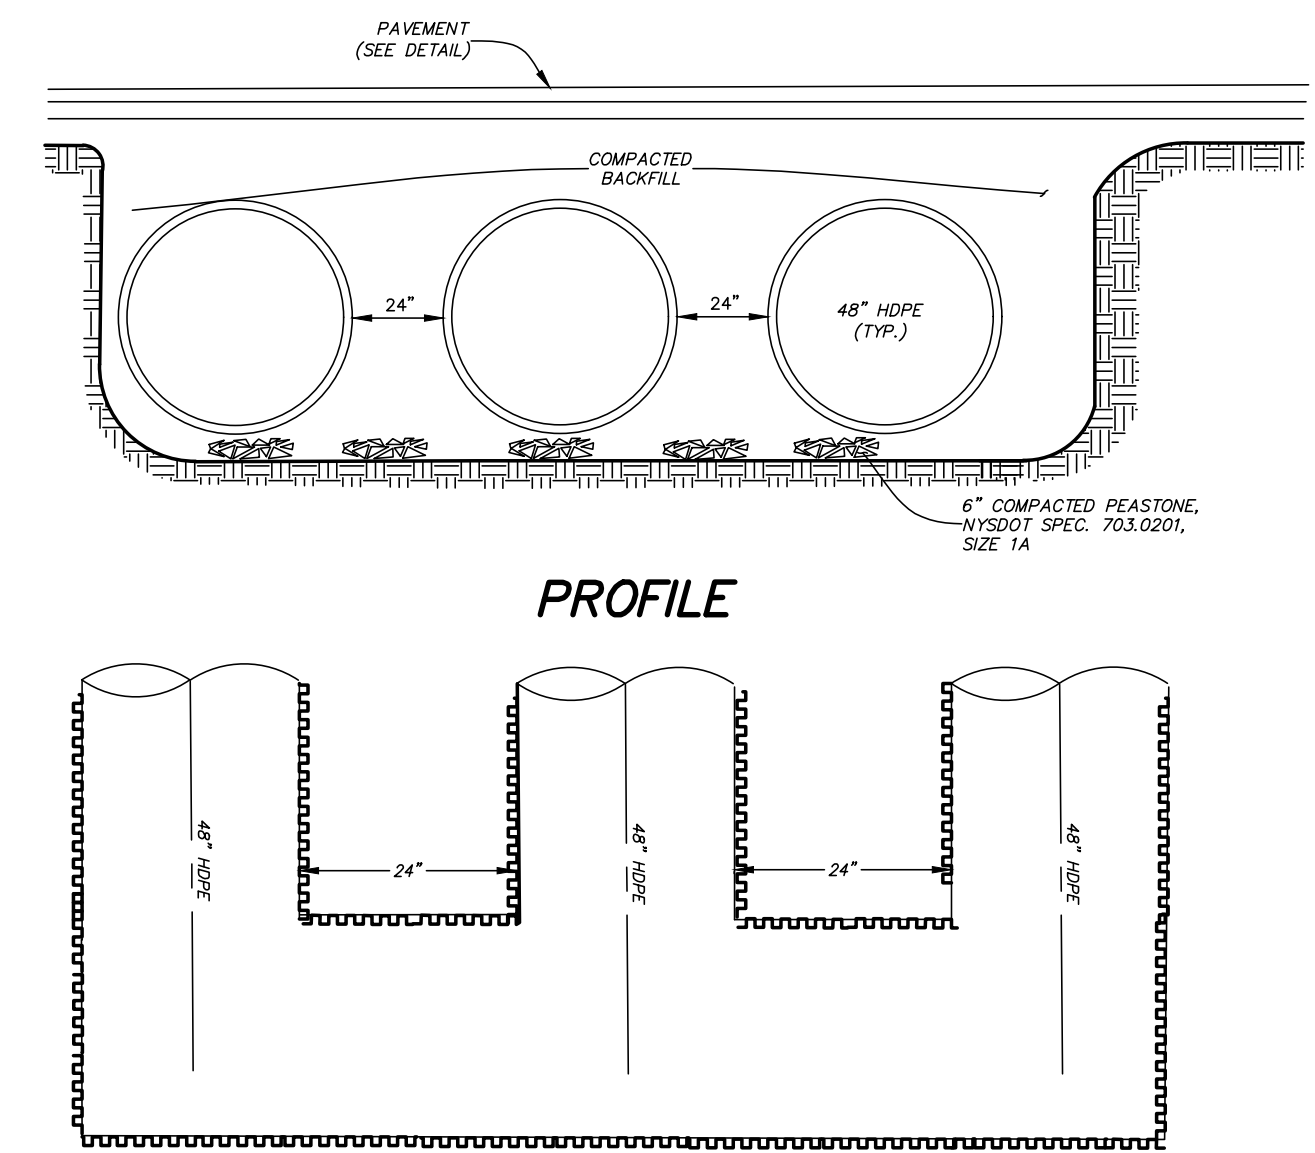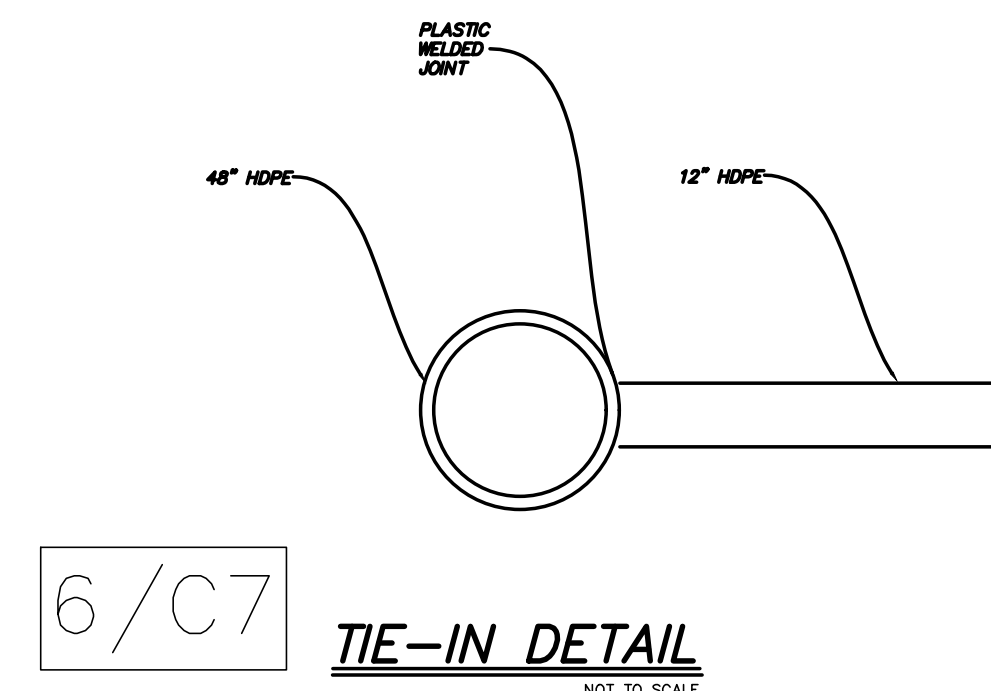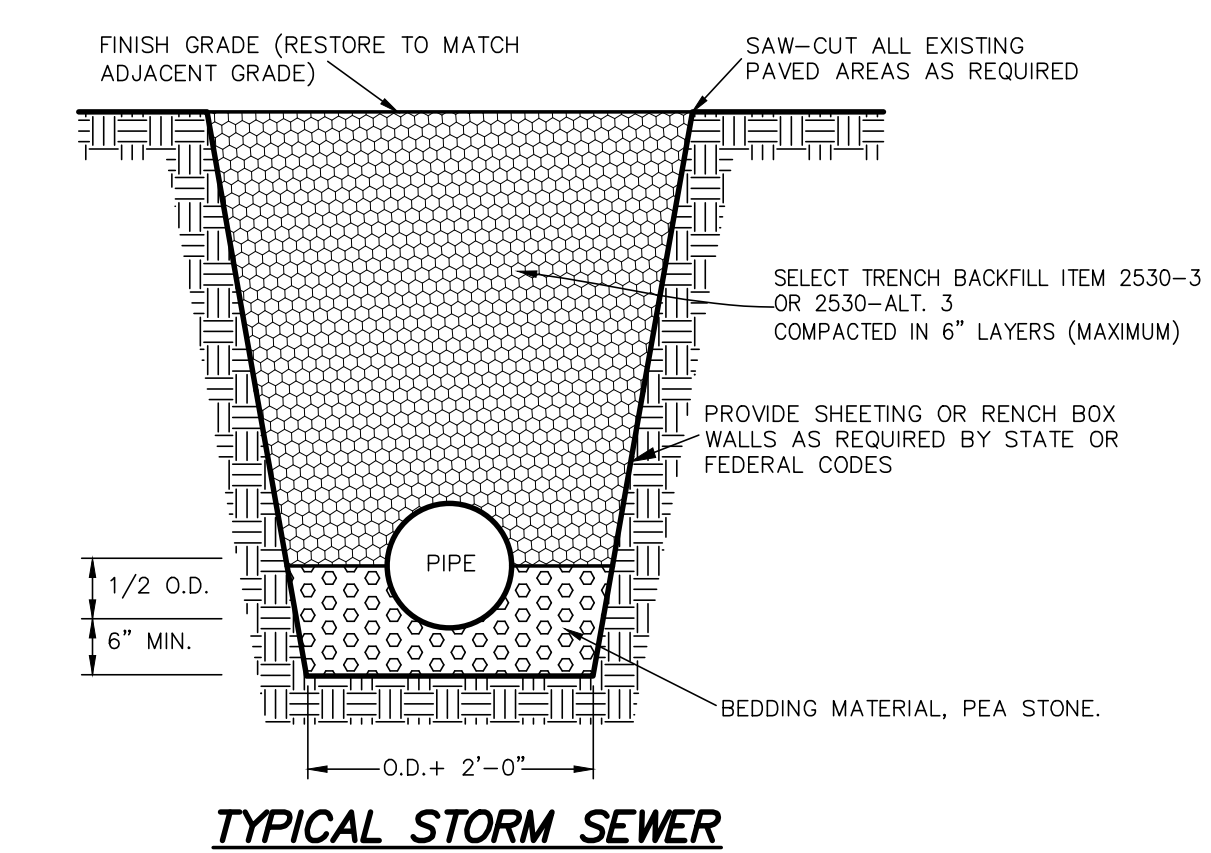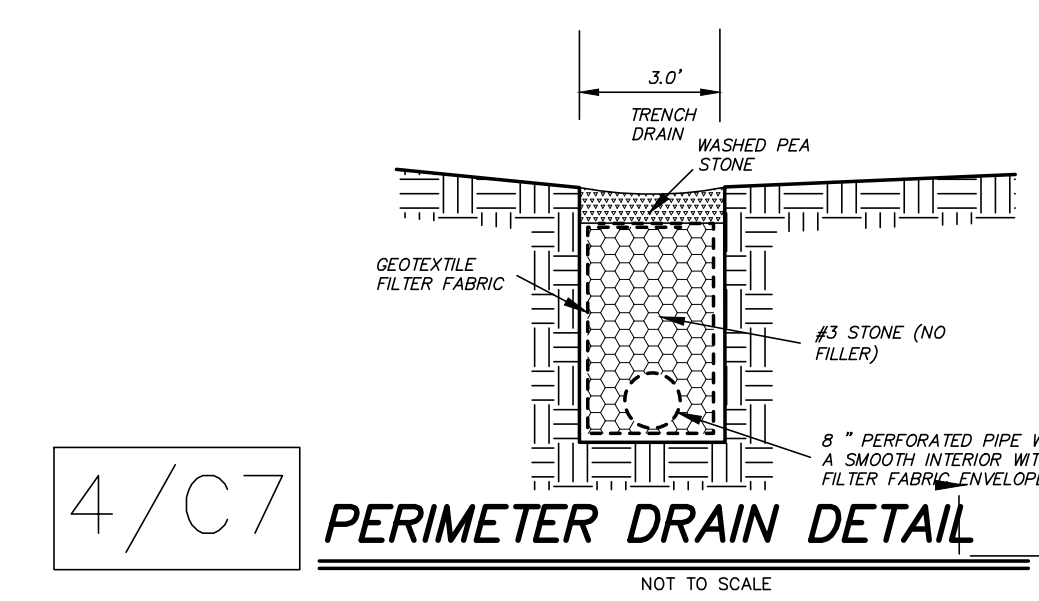

HERSHBERG & HERSHBERG
Consulting Engineers and Land Surveyors
18 Locust Street
Albany, New York 12203

ALTERATION OF THIS DOCUMENT EXCEPT BY A LICENSED PROFESSIONAL ENGINEER OR LAND SURVEYOR, IS ILLEGAL.

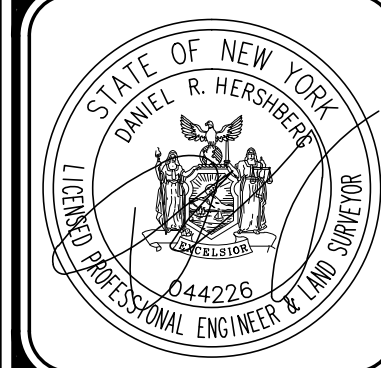

DATE	REMARKS
03/17/21	GENERAL UPDATES
05/17/21	GENERAL UPDATES

REVISIONS

UTILITY DETAILS
25 DELAWARE AVENUE
ALBANY, NY

FILE: 180244
SCALE: NA
BY: TMO
CHK: DPH
DATE: 11/10/2020
180244-LDWG

MAP POCKET #5

MAP #C – 9

EROSION & SEDIMENT CONTROL PLAN

MAP POCKET #6

MAP # C-10

EROSION & SEDIMENT CONTROL DETAILS

